# B30 Frame and Infill Panel

Innovative framed balcony and interfacing system with concealed fixing



"B30 Frame and Infill Panel provides a cost effective balustrade solution with the minimalistic look of structural glass or aesthetically pleasing powder coated vertical railing"



## Frame and Infill Panel

- Provides complete edge protection to a balcony reduces the number of trades needed
- Cost-effective solution with the look of a structural glass system
- Lighter materials result in less weight on the balcony

- Colour of balustrade elements to coordinate with the building design
- Good integration with other trades including waterproofing (see technical details) due to versatile base fixing rail
- Quick to install improves lead times and coordination with other trades



Frameless glass appearance with the cost of post and infill system.



B30 Frame and Glass Infill offers a structural glass effect for the cost of a posts and glass balustrade. Used on balconies and terraces, it incorporates a continuous base and profiled handrail to clamp the glass on top and bottom edges. There are no glass clamps to obstruct the clean lines of the slim posts and rails.




Install

Aesthetically pleasing powder coated vertical railing.



Design

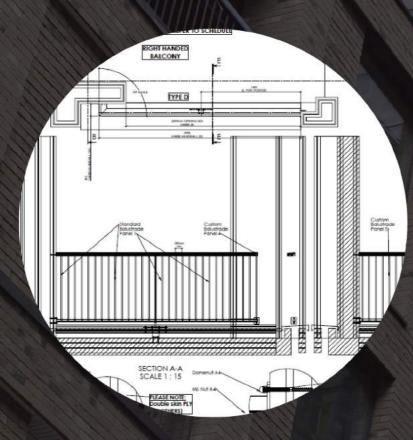

Manufacture



Install

The B30 Balcony Edge System can be used with a number of infills including vertical bars to a coordinated powder coated colour. The result is a cost effective vertical bar balustrade with high quality consistent finishes. Used on balconies and terraces, it incorporates a continuous base and profiled handrail to secure the vertical bars.



### Technical Features of the B30 Balustrading System.




Waterproofing

B30 base extrusions are designed to integrate with waterproofing systems and assist / compliment a water proofing strategy.



Protection

B30 can be fitted early on in the project then carefully wrapped and protected from damage during construction. This can then form the temporary edge protection while other floor and internal works progress.



Cladding / Facia Integration

B30 Base extrusions are designed to integrate with cladding and facias.



Rapid Install

On a recent project in Canning Town, BA Systems have fully installed 400m of the B30 System in 4 weeks. Due to the modular design of B30, installation is very rapid.



Technical Features – Finishes of the B30 Balustrading System




#### **Powder Coated**

Polyester Powder Coating achieves a resilient finish, with a huge range of colour options. Visually, it's equally well suited to toning in with existing designs.



#### Woodgrain

Woodgrain retains timeless beauty of hardwood, but is impervious to splitting or decay, giving maintenance-free benefits of polyester powder coating. This is achieved resulting in a durable textured surface.

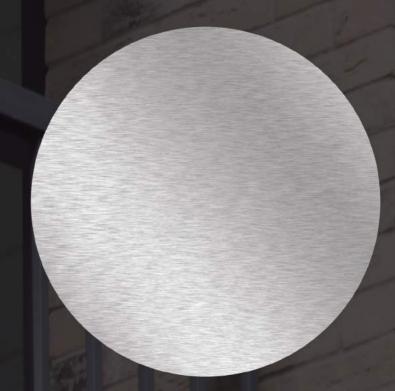

#### Anodised

Enhances the natural qualities of aluminium still further, providing a strong contemporary finish with incomparable corrosion and abrasion resistance.



NAME - The Gatefold Building
SECTOR - Residential
LOCATION - Hayes
ARCHITECT - Frank Reynolds
CONTRACTOR - Willmott Partnership Homes Ltd
CONTRACT VALUE - £25M
BALUSTRADE VALUE - £606K

The Gatefold Building project (named after the old vinyl record sleeves which were manufactured on this site) will create 132 rented apartments, office space, a new café and community amenities. BA Systems is currently working with Willmott Dixon to install its B30 Frame & Infill Panel System, making this building available to the Hayes community.

Working closely with the architects and the Willmott Dixon design team, the balustrade fixing details were developed, simplified and agreed at an early stage to ensure that flow would not be hindered during the installation phase. BA Systems provided the solution to over 1500m of balustrade required on the walkways, terraces and balconies with their B30 Frame & Infill panel balustrade system - as a product that would fulfil the design requirements, as well as guarantee maximum project flow.



NAME - Paddington Exchange - North Wharf Gardens
SECTOR - Residential
LOCATION - Paddington
ARCHITECT - Assael Architecture
CONTRACTOR - Bouygues UK Ltd
CONTRACT VALUE - £55M
BALUSTRADE VALUE - £467K

Paddington Exchange, is a striking residential development by Taylor Wimpey Central London. It is a collection of just 123 high specification one, two and three bedroom apartments, all with terraces or balconies, arranged over fourteen spacious floors. Light-coloured brickwork and extensive use of glass throughout the development reflect light to maximise the feeling of space. The overall effect is one of openness and light – with a touch of style and glamour – Taylor Wimpey.

BA Systems is currently working with Bouygues UK Ltd to provide balustrade to the balconies, terraces – a prime feature of this project is approximately 250m of B30 Frame and vertical railing infill balustrade system where BA Systems worked closely with the design team to integrate the system into the façade construction. This met the structural loading requirements whilst keeping the fixing points as minimalistic as possible.



#### Balustrade Systems for the construction industry.

Over the past 20 years, BA Systems has redefined the design, manufacture, installation of glass balustrade systems. By streamlining our products and project processes, we have been able to significantly improve our service. We can consistently offer short lead-times to meet changes in programme, along with rapid, hassle-free installation.

Our balustrades are categorised into 4 systems. Each system has a range of options to suit your project.



WALL-MOUNTED HANDRAIL



Complementary handrails, designed to coordinate with our balustrade systems.

**VIEW B10 ONLINE** 



**POST & INFILL** 



Highly versatile stair and balcony handrail system, with many finishes & infill options.

**VIEW B20 ONLINE** 



**FRAME & INFILL PANEL** 



Innovative framed balcony and interfacing system, with concealed fixing.

VIEW B30 ONLINE



FRAMELESS GLASS



Enjoy uninterrupted views with this minimalist, all-glass solution.

**VIEW B40 ONLINE** 



# Getting the design right as early as possible in a project ensures success for all parties involved.

#### Step one

#### **INITIAL DESIGN REVIEW**

At the initial pre-order stage, a detailed design review is completed to ensure all parties understand and agree on the overall concept – this ensures our proposals meet all requirements.

### Step two

#### **DESIGN DEVELOPMENT**

We collaborate with all parties involved in a project, to develop the design and successfully meet all requirements.

Our CAD facilities enable us to offer 3D visuals to ensure clarity - this process facilitates the approval process and saves valuable project time.

#### Step three

#### **SURVEY & MANUFACTURE DRAWING**

When the site is fully ready, we survey all relevant areas and provide detailed manufacture & installation set out drawings. These are based on the site's dimensions and all previously agreed elements. A final copy of these are submitted to our clients for their records.

# "We're ready, when you are ready for us!"

Construction programmes are constantly changing. To ensure we fully meet our clients' needs, we have spent the last 12 months further streamlining all of our processes - from initial site survey and design & drawing, through to our manufacturing and site installation procedures.

This means we have improved our service level and at the same time, more than halved our average lead-time from 12 weeks to less than 6 weeks. What difference does this make to you?

- 1. We are more **flexible** we can accommodate changes in programme, "We're ready, when you are ready for us"
- 2. We are **reliable** we consistently meet our client's final agreed installation dates.
- 3. We carry out **rapid** installation the installation of our products is completed in remarkably short time on site.
- 4. We aim to achieve **no hassle** With BA's management pro-actively working closely with our clients project management team, we do all we can to assist them with smooth & snag free completions.



We have successfully achieved accreditation from, and are fully compliant with the following regulatory bodies:



Contractors Health and Safety Assessment Scheme (CHAS)



A government run scheme to regulate health & safety standards



Collaboration and sharing of PQQ information



SMAS health & safety membership organisation



BSI - in the use of industryrespected best practices




Construction Skills Certification Scheme (CSCS)

A selection of some of the companies we have partnered with:






























### The balustrade system specialists™

**DOWNLOAD ALL BA SYSTEMS** 

**ACCREDITATIONS HERE** 

01603 722330 sales@basystems.co.uk www.basystems.co.uk

BA Systems is a registered trademark of Brass Age Ltd. For more information about our products or to discuss your project, please contact us today:

**GET IN TOUCH ONLINE** 

