thermostats
TOTAL SYSTEM CONTROL

The 5259 is a slimline, unobtrusive underfloor heating thermostat with fully functional LCD touchscreen display.

- LED backlit touchscreen display
- Full 7 day, 6 event programmable heating schedule
- Fits on a standard width electrical back box
- Available in over 1000 colours
- White, chrome and black stock options
- Can control up to 16A or 3680W UFH systems

MULTI ZONE PROGRAMMING

The 5259 fits into any interior and provides ultimate control of your underfloor heating system.

Rising energy costs are forcing us to be more careful about our energy use and the 5259 features a 7 day, 6 event programmable heating schedule which can be set up to provide efficient heating that fits perfectly with your lifestyle.

ENHANCE EVERY PROJECT

Enhance your project with Thermonet® premium quality electric underfloor heating. The Thermonet® experience guarantees a hassle free installation and ultimate comfort.

INCLUDED IN THE RANGE

- 5265 Programmable Thermostat
- 5260 Manual Thermostat
- 5259 White Touchscreen Thermostat
- 5257 Satin Black Touchscreen Thermostat
- 5255 Chromed Touchscreen Thermostat
- 5263 Multizone Programmer
- 5253 Custom Colour Fascia Kit (for 5259)

WHAT'S IN THE BOX?

- 5259 Thermostat
- Fixing Plate
- Fixing Screws
- Sensor Probe
- Sensor Conduit
- Installation Guide

Warranty Details
All of our thermostats are covered by a 3 year limited manufacturer guarantee.

THERMOSTAT LOCATION

The thermostat should be located within the room to be heated, subject to current electrical regula-tions relating to bathrooms and wet areas. As the thermostat is floor sensing it can be installed out-side the room or in a cupboard if necessary.

For easy operation and acces to controls choose a location about 1.3m above the floor.

Should a remote location for the thermostat be necessary the system wiring can be extended up to 50m from the installation. Suitable extension wire is available from Thermogroup UK if required.

LARGE AREAS OVER 16A

For areas exceeding 16 AMPS that require control by a single thermostat, a snubber/ contactor must be used.

Snubbers/contactors are available in our electrical accessories range.

Technical Data	
Sensor Modes	Floor, Air, F/A
Voltage	230V
Consumption	2W
Max Load	16A 3680W
Setting Range	5 - 90°C
Storage Temp	-20 - 50°C
Protection	IP32
Housing	Anti Flammable PVC
Height	90mm
Width	86mm
Depth	43mm
To Wall	13mm

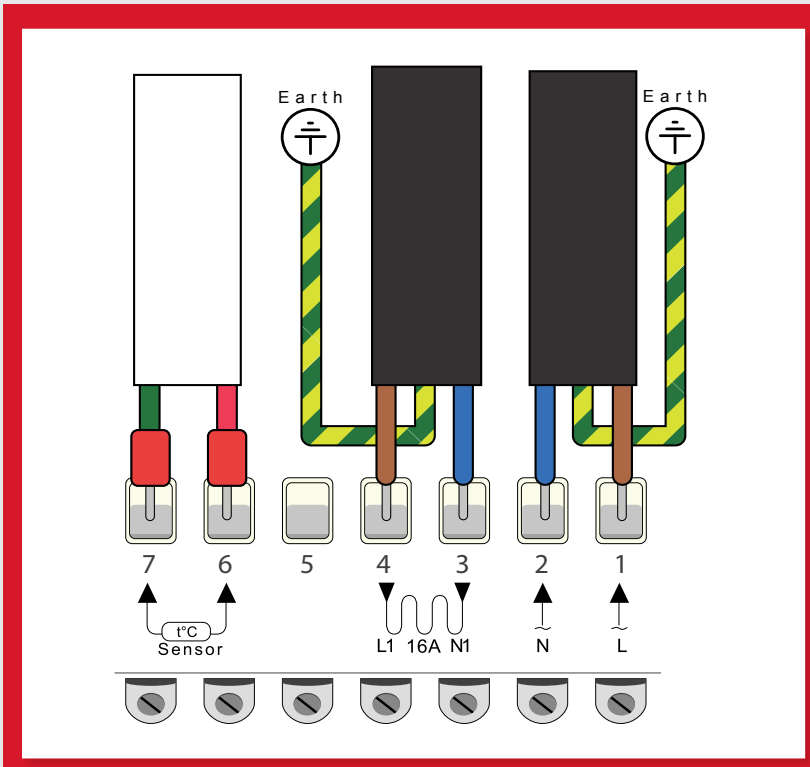

Simple installation and wiring process

Available in a huge range of colours

To make sure we can provide you with the perfect solution, the 5259 thermostat is available in a range of stock colours and can be produced in any Pantone or RAL colour to order. Download the colour Guide onilne.

CONTACT US ONLINE

Browse our full product range, watch videos, download product literature and get a quote, all on the Thermogroup UK website.

www.thermogroupuk.com

CONTACT US BY PHONE

Got a question or query? Call our UK support line free from your land line. Open 07:30 – 16:30 Mon - Fri

0800 019 5899

CONTACT US BY MAIL

Tell your satnav where to find us or just write us a letter to say hello!

Thermogroup UK, Bridge House, Hop Pocket Lane, Paddock Wood, Kent. TN12 6DQ.

©Thermogroup UK 2013 E&OE 5259_01_13

Thermogroupuk

SUSTAINABLE HEATING SOLUTIONS

OHSAS 18001 REGISTERED FIRM · ISO 14001 REGISTERED FIRM · ISO 9001 REGISTERED FIRM