




# Ventilation Catalogue



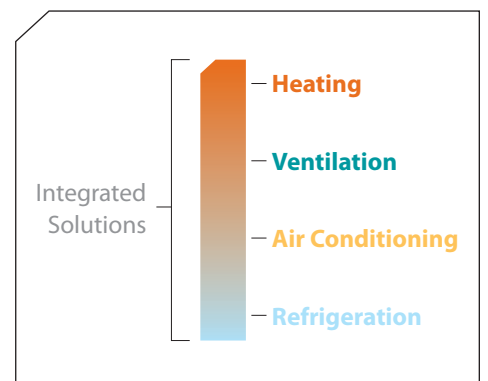

Daikin Europe N.V.

# ABOUT DAIKIN

Daikin has a worldwide reputation based on almost 85 years' experience in the successful manufacture of high quality air conditioning equipment for industrial, commercial and residential use.

## Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.

# ENVIRONMENTAL AWARENESS

## Air Conditioning and the Environment

Air conditioning systems provide a significant level of indoor comfort, making **optimum working and living conditions** possible in the most extreme climates.

In recent years, motivated by a global awareness of the need to reduce the burdens on the environment, Daikin has invested enormous efforts in limiting the negative effects associated with the production and the operation of air conditioners.

Hence, models with **energy saving** features and improved **eco-production** techniques have seen the light of day, making a significant contribution to limit the impact on the environment.



This sign highlights features where Daikin has invested into technologies to reduce the impact of air conditioning on the environment.

This sign can be found on pages: 8 - 9 - 31



HRV - HEAT RECLAIM VENTILATION	7	4 High static pressure	20
<b>BENEFITS FOR BUILDING OWNERS</b>	<b>8</b>	5 Built-in drain pump	20
1 Energy energy saving ventilation	8	<b>CONNECTION CONDITIONS</b>	<b>20</b>
2 Reduces the load on the air conditioning system	9	<b>SPECIFICATIONS</b>	<b>21</b>
3 Free cooling	9	<b>ACCESSORIES</b>	<b>21</b>
<b>BENEFITS FOR DESIGN OFFICES AND CONSULTANTS</b>	<b>10</b>		
1 Total solution concept	10	USER FRIENDLY CONTROL SYSTEMS	23
2 Slim design	10	1 Interlock of the ventilation operation	
3 High static pressure	10	with the air conditioner operation	23
4 Wide range of units	10	2 Super wiring System	23
5 Wide operation range	10	<b>OVERVIEW OF CONTROL SYSTEMS</b>	<b>24</b>
<b>BENEFITS FOR INSTALLERS</b>	<b>11</b>	1 Individual Control Systems	26
1 Simple design and construction	11	2 Centralised Control Systems	28
2 Filter cleaning	11		
3 High static pressure	11	ERQ (PAIR) AND VRV® AIR HANDLING APPLICATIONS	31
<b>BENEFITS FOR END USERS</b>	<b>12</b>	<b>BENEFITS</b>	<b>31</b>
1 Create a high quality indoor environment	12	1 High efficiency	31
2 Fresh up operation	13	2 High comfort levels	32
3 Low operation sound level	13	3 Easy design and installation	34
4 Individual control via HRV remote control	13	4 Total solution concept	35
<b>SPECIFICATIONS</b>	<b>14</b>	<b>WHICH SYSTEM OFFERS ME THE BEST SOLUTION?</b>	<b>32</b>
VAM-FA	14	1 I only need a connection to an air handling unit	32
VKM-GM	15	2 I need an air handling unit and heating, and/or cooling	32
VKM-G	16	<b>SYSTEM OVERVIEW</b>	<b>33</b>
<b>ACCESSORIES</b>	<b>17</b>	<b>CONTROL POSSIBILITIES</b>	<b>34</b>
		<b>SELECTION OF AIR HANDLING UNITS</b>	<b>35</b>
FXMQ-MF – OUTDOOR AIR PROCESSING UNIT	19	1 Pair application	36
<b>BENEFITS</b>	<b>20</b>	2 Multi application	36
1 100% fresh air intake possible	20	<b>SPECIFICATIONS</b>	<b>37</b>
2 Leaves maximum floor and wall space for Furniture, decoration and fittings	20	<b>OPTIONS</b>	<b>47</b>
3 Wide operation range	20		

# WHICH SYSTEM OFFERS ME THE BEST SOLUTION?

With the advent of new building regulations, greater awareness of increasing energy costs and a responsibility towards environmental issues, modern commercial spaces are insulated better than ever. Double glazing, thicker roof insulation and draught excluders of course, help considerably towards reducing heating/cooling demand and burdens on the environment. The down-side however, is that these same commercial spaces have now become, in effect, sealed boxes with little or no replenishment of the air.

Daikin offers a variety of solutions for the provision of fresh air ventilation to offices, hotels, stores and other commercial outlets – each one complementary to and as flexible as both Sky Air® and VRV® systems themselves.

## **HEAT RECLAIM VENTILATION**

Proper ventilation is a key component of climate control in buildings, offices and shops. In its basic function, it ensures a flow of incoming fresh air and outgoing stale air. Our HRV (heat reclaim ventilation) solution can do much more. It can recover heat and **OPTIMISE THE BALANCE BETWEEN INDOOR AND OUTDOOR TEMPERATURE AND HUMIDITY**, thus reducing the load on the system and increasing efficiency.

## **OUTDOOR AIR PROCESSING IN A SINGLE UNIT**

Our FXMQ-MF air processing solution uses heat pump technology to **COMBINE FRESH AIR TREATMENT AND AIR CONDITIONING IN A SINGLE SYSTEM**, thereby eliminating the usual design problems associated with balancing air supply and discharge. Total system cost is reduced and design flexibility enhanced because the indoor air conditioning fan coil units and an outdoor air treatment unit can be connected to the same refrigerant line.


## **ERQ (PAIR) AND VRV® AIR HANDLING APPLICATIONS**

For small, medium and large commercial spaces, we offer a range of R-410A inverter condensing units that provide air handling and air conditioning. This approach combines the flexibility of our ERQ and VRV® units with Air Handling Applications, resulting in a simple, reliable design for **OPTIMUM CONTROL OF INDOOR AIR QUALITY AND MAXIMUM EFFICIENCY**.



# OVERVIEW VENTILATION RANGE

**Ventilation:** provision of fresh air



**Humidification:** optimise the balance between indoor and outdoor humidity

**Air processing:** optimise the balance between indoor and outdoor fresh air temperature

Type	name	Components of indoor air quality	Image	Air flow rate (m³/h)									
				0	200	400	600	800	1,000	1,500	2,000	4,000	6,000
HEAT RECLAIM VENTILATION	VAM-FA	1 Ventilation		[Bar chart showing range from 200 to 2,000 m³/h]									
	VKM-G	1 Ventilation 3 Air processing		[Bar chart showing range from 400 to 800 m³/h]									
	VKM-GM	1 Ventilation 2 Humidification 3 Air processing		[Bar chart showing range from 400 to 800 m³/h]									
OUTDOOR AIR PROCESSING UNIT <sup>1</sup>	FXMQ-MF	1 Ventilation 3 Air processing		[Bar chart showing range from 1,000 to 1,500 m³/h]									
ERQ AND VRV <sup>2</sup> AIR HANDLING APPLICATIONS <sup>2</sup>	EKEXV-kit	1 Ventilation 3 Air processing		[Bar chart showing range from 1,500 to 4,000 m³/h]									


<sup>1</sup> Not connectable to VRV/III-S (RXYSQ-PAV, RXYSQ-PAY)

<sup>2</sup> Air flow rate is a calculated indication only, based on the following values: heating capacity EKEXV-kit \* 200m³/h



# HRV - HEAT RECLAIM VENTILATION

Ventilation, humidification & air processing

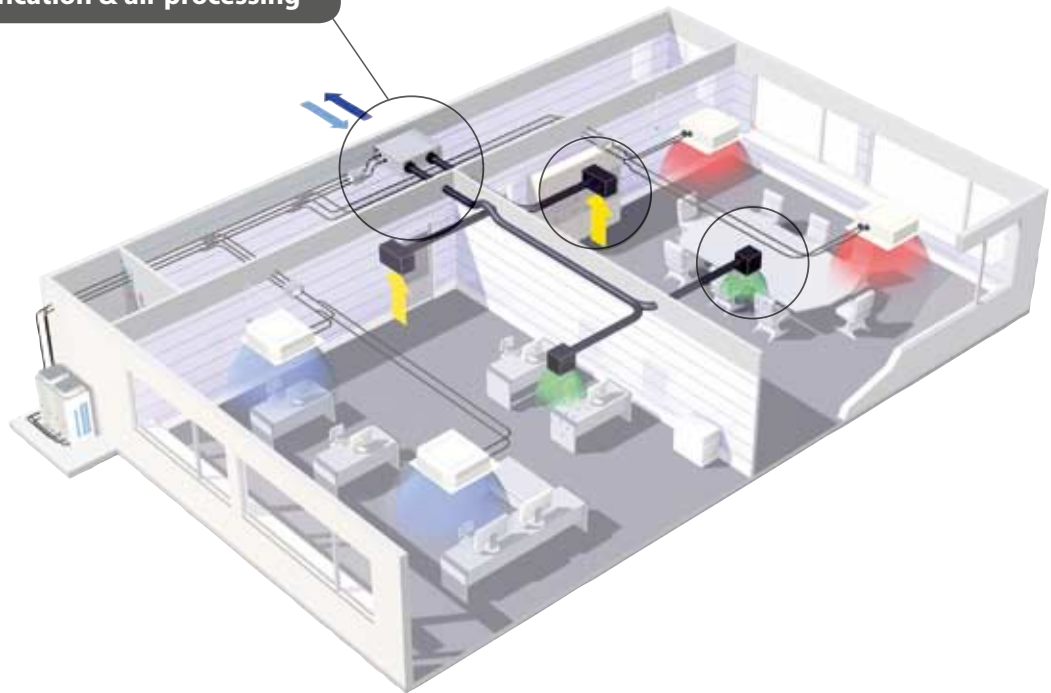

## HRV helps to create a high quality indoor environment

The Daikin HRV (Heat Reclaim Ventilation) unit recovers heat energy lost through ventilation and maintains a comfortable and clean indoor environment without changes in room temperature. This also reduces the load on the air conditioning system and saves energy.

In addition, the HRV interlocks with Daikin's air conditioning systems (for example VRV® and Sky Air®) and automatically switches over to ventilation mode when needed, further increasing the effects of energy conservation. HRV can be integrated on the air conditioner remote control allowing total control over air conditioning and ventilation via a simple configuration.

The current line-up includes models with or without DX coil and/or humidifier. The DX coil helps to prevent the direct impact of cold airflow upon persons during the heating cycle and vice versa, the humidifier optimises the balance between indoor and outdoor humidity.

Finally high static pressure enhances design flexibility.



## BENEFITS FOR BUILDING OWNERS




### ENERGY SAVING VENTILATION

Buildings need year round ventilation. In traditional ventilation systems the conditioned inside air is lost when exhausted externally and new unconditioned air is brought into the building. This results in large amounts of air being heated up or cooled down over and above the actual load of the air conditioning system and leads to a substantial waste of energy. The Daikin HRV system however, automatically balances outside and inside temperature and humidity enabling the recovery of heat/cold with significant savings in running costs.

### Specially developed HEP element

The heat exchange element uses a high efficiency paper (HEP) possessing superior moisture absorption and humidifying properties. The heat exchange unit rapidly recovers heat contained in latent heat (vapour). The element is made of a material with flame resistant properties and is treated with an anti-moulding agent.

Operation of the high efficiency paper.

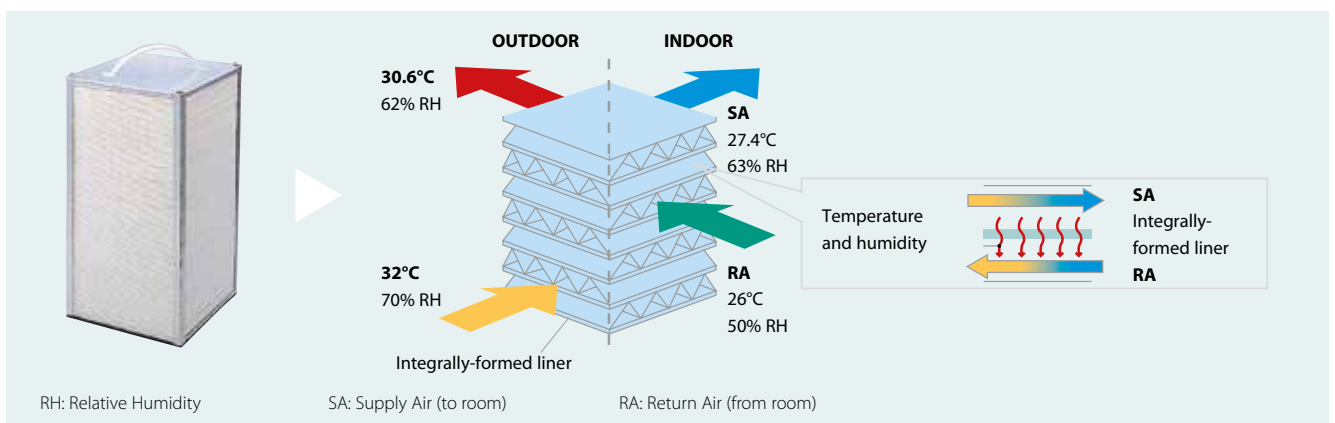






## REDUCING THE LOAD ON THE AIR CONDITIONING SYSTEM

Thanks to the use of heat reclaim ventilation the load on the air conditioning is reduced with approximately 31%.

- 23% by operating in total heat exchange mode (in comparison with normal ventilation fans)
- another 6% by auto-ventilation mode changeover switching
- a further 2% by pre-cool, pre-heat control (reduces air conditioning load by not running the HRV shortly after the air conditioning is switched on.)

Note: the values mentioned above may vary according to weather and other environmental conditions at the location of the unit's installation

## Operation automatically switches to the optimum pattern to suit prevailing conditions

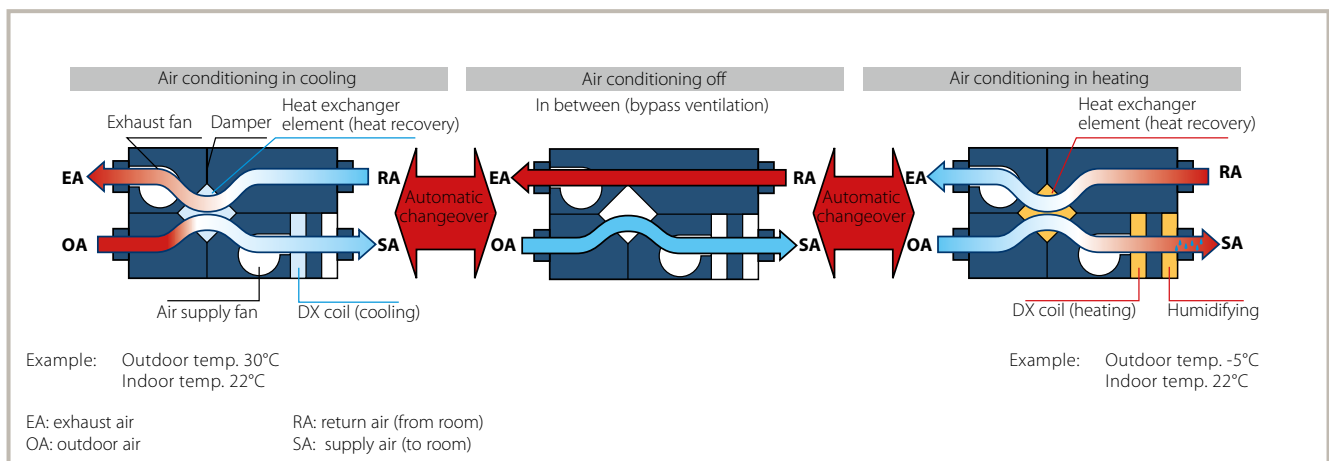

## FREE COOLING

The free cooling option reduces the air conditioning energy consumption and uses energy in a more efficient way by actively introducing fresh air into rooms. Free cooling maintains indoor comfort through the introduction of low temperature outdoor air into rooms.




Note: Free cooling is only available in combination with Intelligent Touch Controller

### Nighttime free cooling operation

Nighttime free cooling operation is an energy saving function operating at night when the air conditioning is switched off. By ventilating rooms containing office equipment that increases room temperature, night purge reduces the cooling load when air conditioning is switched on in the morning, reducing the daily running costs.

Nighttime free cooling operation is factory set to "off" but can be activated by your Daikin dealer on request.

Nighttime free cooling operation only available on VKM units connected to a VRV® system

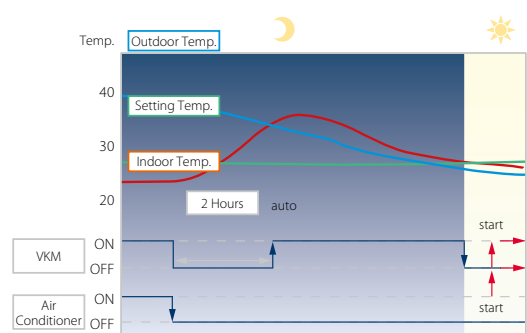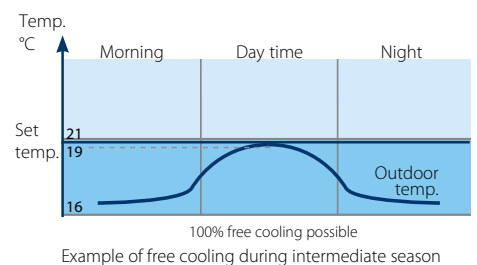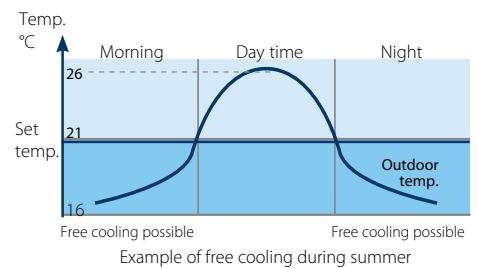

# BENEFITS FOR DESIGN OFFICES AND CONSULTANTS

## TOTAL SOLUTION CONCEPT - INTEGRATED VENTILATION

The integration of ventilation into a total building climate system, such as the VRV® system, offers numerous advantages. Daikin supplies software which simulates the working of the entire system, simplifying its design and presenting an ideal solution for the building itself and a 'one-stop' solution for the client.

As well as design benefits, it also simplifies project follow-up, installation and subsequent commissioning and maintenance since only one party is involved.

Finally, the end user benefits from 'interlocking' ventilation with air conditioner operation by virtue of greatly simplified overall system control.

Note: more information on integrated control can be found in the control systems chapter


## SLIM DESIGN

The slim design of the HRV unit enables it to be mounted in narrow ceiling voids and irregularly shaped spaces.


Installation under the floor of a small building



Installation under a beam




Installation in an irregular space



## HIGH STATIC PRESSURE

External static pressure (ESP) up to 160 Pa facilitates the use with flexible ducts of varying lengths.

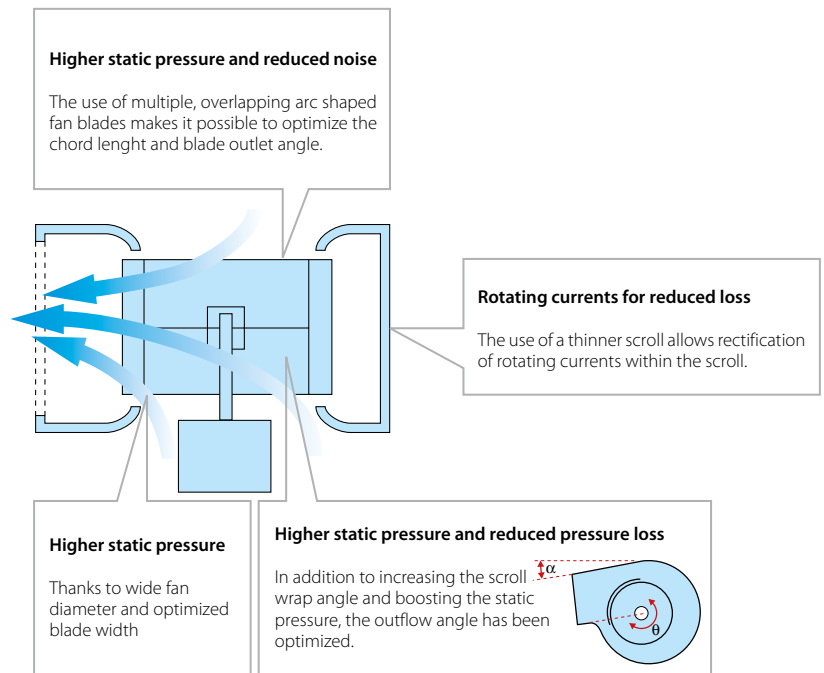

## WIDE RANGE OF UNITS


The wide Daikin unit range ensures correct equipment design and sizing.

## WIDE OPERATION RANGE


The HRV unit can be installed in practically any location.

The standard operation range (outdoor temperature) is from -15°C to 40°CDB (50°CDB for VAM units) and can be extended down to -25°C if a pre heater is installed.

<sup>1</sup> Contact your local dealer for more information and restrictions

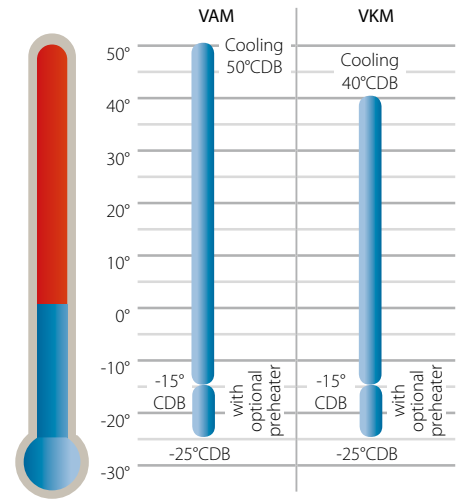

## BENEFITS FOR INSTALLERS

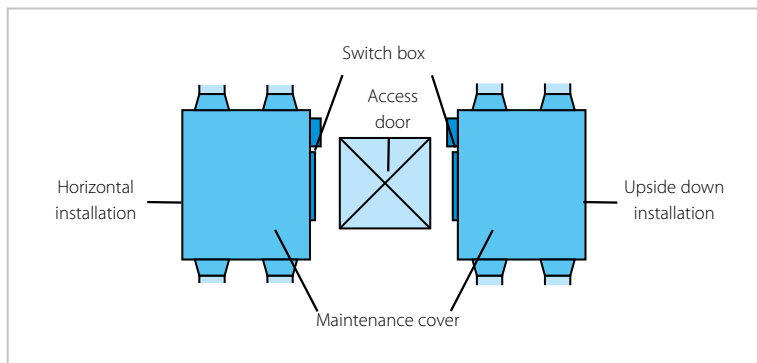

### SIMPLE DESIGN AND CONSTRUCTION

The unit can be installed either horizontally or upside down always allowing easy access for inspection and maintenance.

A 450 mm square inspection hatch enables maintenance and heat exchange element replacement to be performed with ease.

Also no drain connection is needed, further simplifying the installation.

### FILTER CLEANING


A signal on the remote control indicates when the air filter needs cleaning.




# BENEFITS FOR END USERS

## CREATING A HIGH QUALITY INDOOR ENVIRONMENT

In addition to the HEP high efficiency paper, VKM models contain a DX-coil and humidifier (VKM only), thereby balancing the incoming fresh air with indoor temperature and humidity and ensuring the best possible indoor environment.

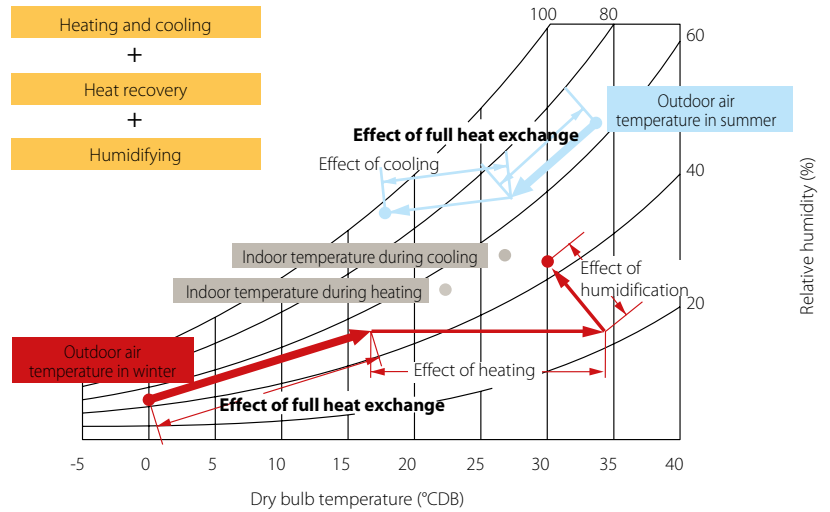


## Operation of humidification and air processing in heating mode (VKM-GM)

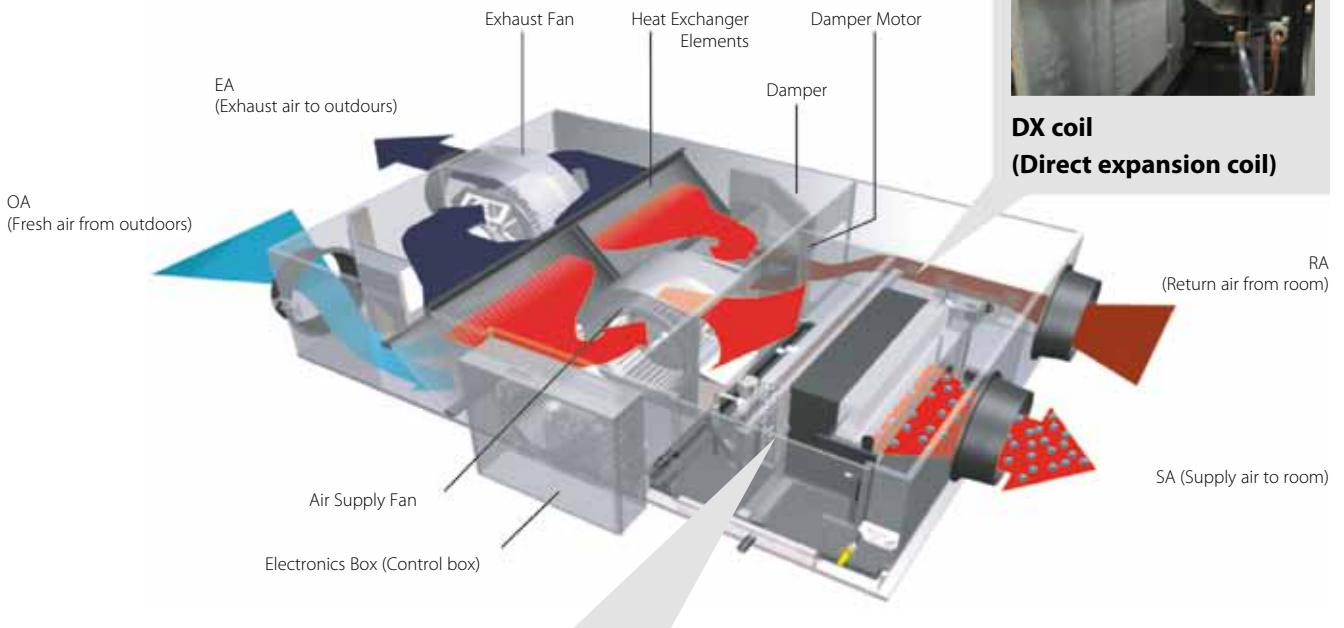


### Humidifier element:

Utilizing the principle of capillary action, water is permeated throughout the humidifier element. The heated air from the DX coil passes through the humidifier and absorbs the moisture.

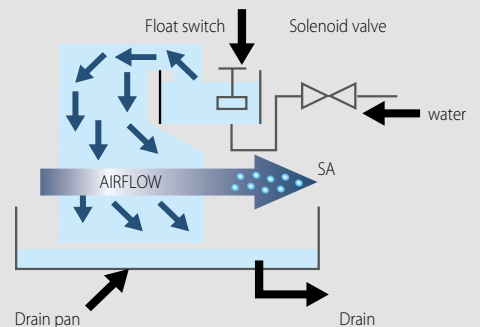

## FRESH-UP OPERATION

The user can select 2 fresh-up modes via the remote control for a more comfortable air environment.

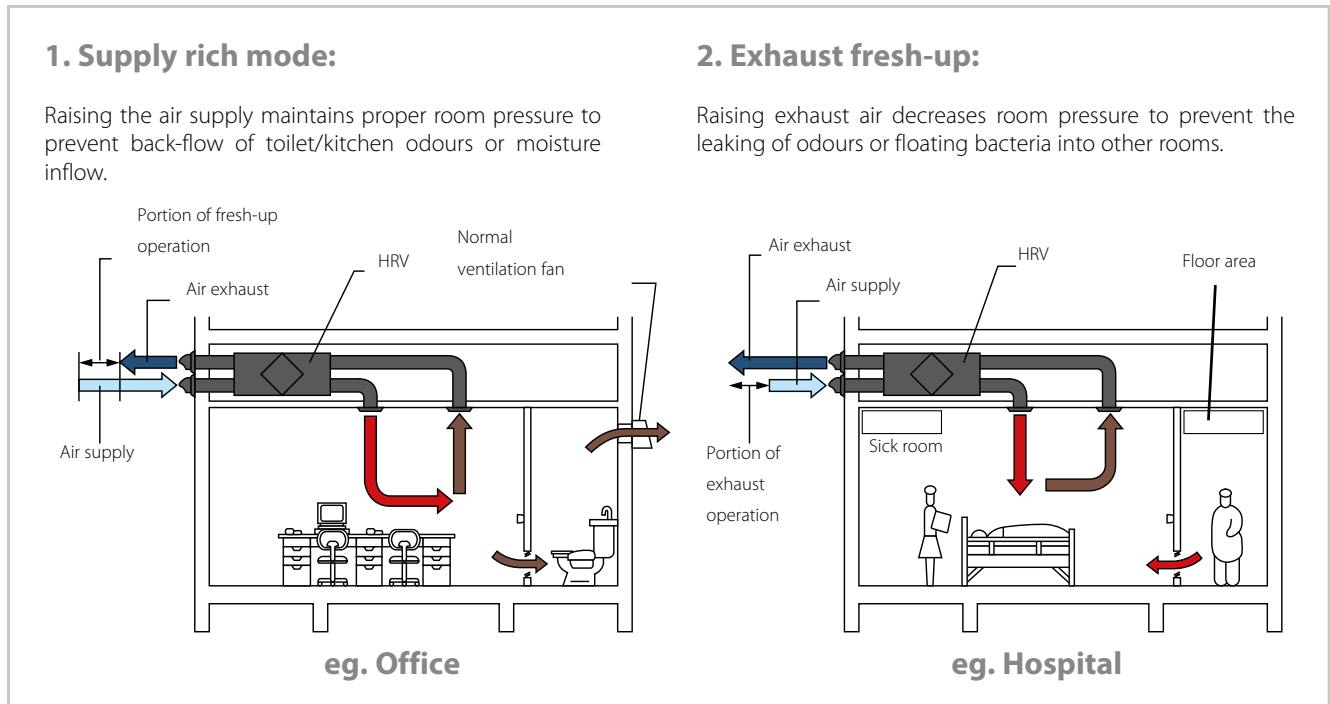

## LOW OPERATION SOUND LEVEL


Continues research by Daikin into reducing operation sound levels has resulted in sound pressure levels down to 20.5dBA (VAM150FA)



dBA	Perceived loudness	Sound
0	Threshold of hearing	-
20	Extremely soft	Rustling leaves
40	Very soft	Quiet room
60	Moderately loud	Normal conversation
80	Very loud	City traffic noise
100	Extremely loud	Symphonic orchestra
120	Threshold of feeling	Jet taking off

## DUST PREVENTION

When the HRV is operating independently, the fan in an interlocked indoor unit continues turning, so dust does not fall from the air filter.

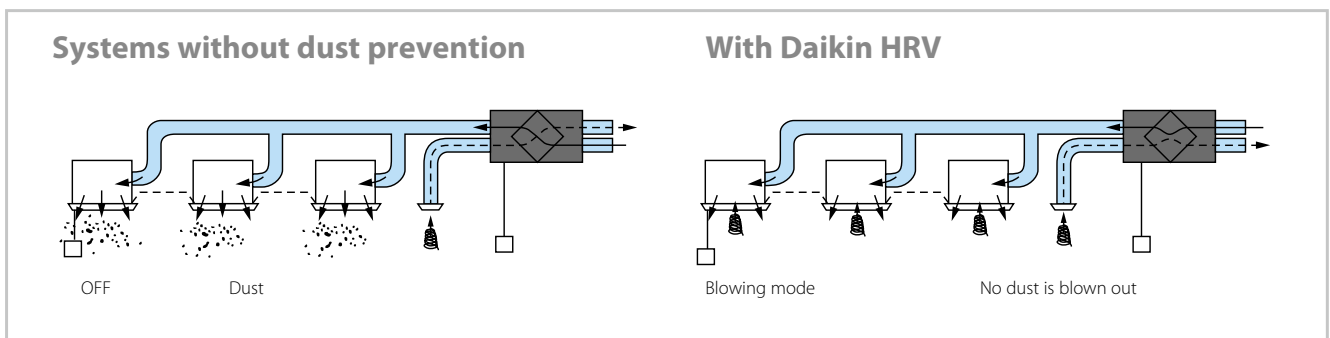



VAM800FA

## SPECIFICATIONS

INDOOR UNIT				VAM150FA	VAM250FA	VAM350FA	VAM500FA	VAM650FA	VAM800FA	VAM1000FA	VAM1500FA	VAM2000FA		
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.116/0.100/0.056	0.141/0.112/0.062	0.194/0.175/0.111	0.212/0.189/0.118	0.380/0.325/0.227	0.451/0.400/0.346	0.469/0.432/0.349	0.864/0.758/0.655	0.953/0.767/0.653	
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.116/0.100/0.056	0.141/0.112/0.062	0.194/0.175/0.111	0.212/0.189/0.118	0.380/0.325/0.227	0.451/0.400/0.346	0.469/0.432/0.349	0.864/0.758/0.655	0.953/0.767/0.653	
Power input - 60Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.117/0.099/0.056	0.138/0.119/0.062	0.226/0.214/0.120	0.253/0.232/0.125	0.432/0.384/0.251	0.514/0.471/0.408	0.571/0.537/0.419	0.981/0.929/0.754	1.017/1.021/0.779	
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.117/0.099/0.056	0.138/0.119/0.062	0.226/0.214/0.120	0.253/0.232/0.125	0.432/0.384/0.251	0.514/0.471/0.408	0.571/0.537/0.419	0.981/0.929/0.754	1.017/1.021/0.779	
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	74/74/79	72/72/77	75/75/80	74/74/77	74/74/76	75/75/76.5	75/75/78			
Temperature exchange efficiency - 60Hz	Ultra high/High/Low			%	74/74/80	72/72/77	75/75/81	74/74/78.5	74/74/78	74/74/76	75/75/78			
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	58/58/64	58/58/62	61/61/67	58/58/63		60/60/62	61/61/63	61/61/64	61/61/66	
	Heating	Ultra high/High/Low		%	64/64/69	64/64/68	65/65/70	62/62/67	63/63/66	65/65/67	66/66/68		66/66/70	
Enthalpy exchange efficiency - 60Hz	Cooling	Ultra high/High/Low		%	58/58/66	58/58/63	61/61/68	58/58/65		60/60/63	61/61/66	61/61/64	61/61/66	
	Heating	Ultra high/High/Low		%	64/64/71	64/64/69	65/65/71	62/62/68.5	63/63/68	65/65/68	66/66/71	66/66/68	66/66/70	
Operation mode				Heat exchange mode Bypass mode Fresh-up mode										
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange										
Heat exchange element				Specially processed non-flammable paper										
Casing				Galvanised steel plate										
Dimensions	Unit	HeightxWidthxDepth		mm	285x776x525			301x828x816		364x1,004x868		364x1,004x1,156	726x1,514x868	726x1,514x1,156
Weight	Unit			kg	24			33		48		61	132	158
Fan				Sirocco fan										
Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m <sup>3</sup> /h	150/150/110	250/250/155	350/350/230	500/500/350	650/650/500	800/800/670	1,000/1,000/870	1,500/1,500/1,200	2,000/2,000/1,400		
		Bypass mode	Ultra high/High/Low	m <sup>3</sup> /h	150/150/110	250/250/155	350/350/230	500/500/350	650/650/500	800/800/670	1,000/1,000/870	1,500/1,500/1,200	2,000/2,000/1,400	
	Air flow rate - 60Hz	Heat exchange mode	Ultra high/High/Low	m <sup>3</sup> /h	150/150/110	250/250/145	350/350/210	500/500/300	650/650/440	800/800/660	1,000/1,000/800	1,500/1,500/1,200	2,000/2,000/1,400	
		Bypass mode	Ultra high/High/Low	m <sup>3</sup> /h	150/150/110	250/250/145	350/350/210	500/500/300	650/650/440	800/800/660	1,000/1,000/800	1,500/1,500/1,200	2,000/2,000/1,400	
External static pressure - 50Hz	Ultra high/High/Low		Pa	69/39/20	64/39/20	98/70/25	98/54/25	93/39/25	137/98/49	157/98/78	137/98/49	137/78/59		
External static pressure - 60Hz	Ultra high/High/Low		Pa	98/54/24	98/54/20	142/85/15	147/54/20	162/69/34	225/118/69	196/108/69	206/118/69	196/88/69		
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	27	28	32	33	34.5	36	36	39.5	40		
			dBA	28.5/26	29/26	34/31.5	34.5/31.5	35.5/33	37/34.5	37/35	41.5/38	42.5/38		
	Bypass mode	Ultra high/High/Low	dBA	27	28	32	33.5	34.5	36	36	40.5	40		
			dBA	28.5/26.5	29/27	34/31	34.5/32.5	35.5/34	37/34.5	37/35.5	41.5/38	42.5/38		
Sound pressure level - 60Hz	Heat exchange mode	Ultra high/High/Low	dBA	28.5/26.5/19	29.5/26/19.5	34.5/32/22	34/31/24	36/33/27	37/35/30		40.5/38/33	41/38/35		
			dBA	28/27/20	29/27/20.5	34.5/33/22	35/33/24	35.5/34/27	37/35/31		40.5/38/33	41/38/35		
	Bypass mode	Ultra high/High/Low	dBA	28/27/20	29/27/20.5	34.5/33/22	35/33/24	35.5/34/27	37/35/31		40.5/38/33	41/38/35		
			dBA	28/27/20	29/27/20.5	34.5/33/22	35/33/24	35.5/34/27	37/35/31		40.5/38/33	41/38/35		
Operation range	Min.			°CDB	-15									
	Max.			°CDB	50									
	Relative humidity			%	80% or less									
Connection duct diameter				mm	100	150	200		250		350			
Piping connections				Drain										
Insulation material				Self-extinguishable urethane foam										
Air filter				Multidirectional fibrous fleeces										
Power supply				Phase/Frequency/Voltage	Hz/V									
				1~/50/60/220-240/220										

(1) Air flow rate can be changed to Low mode or High mode.

(2) Operation sound is measured at 1.5m below the center of the body.

(3) Sound values are measured in an anechoic chamber. Operating sound level generally becomes higher than this value depending on the operating conditions, reflected sound, and peripheral noise.

(4) The noise level at the air discharge port is about 8dB higher than the operating sound of the unit.



VKM80-100G

## SPECIFICATIONS

INDOOR UNIT				VKM50G	VKM80G	VKM100G
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	0.560/0.490/0.420	0.620/0.560/0.470	0.670/0.570/0.480
	Bypass mode	Nom.	Ultra high/High/Low			
Fresh air conditioning load	Cooling			4.71 (2)	7.46 (2)	9.12 (2)
	Heating			5.58 (3)	8.79 (3)	10.69 (3)
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			76/76/77.5	78/78/79	74/74/76.5
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		64/64/67	66/66/68	62/62/66
	Heating	Ultra high/High/Low		67/67/69	71/71/73	65/65/69
Operation mode				Heat exchange mode Bypass mode Fresh-up mode	Heat exchange mode Bypass mode Fresh-up mode	Heat exchange mode Bypass mode Fresh-up mode
Heat exchange system				Air to air cross flow total heat (sensible + latent heat) exchange		
Heat exchange element				Specially processed non-flammable paper		
Casing				Galvanised steel plate		
Dimensions	Unit	HeightxWidthxDepth		387x1,764x832	387x1,764x1,214	
Weight	Unit			96	109	114
Fan	Type			Sirocco fan		
	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	500/500/440	750/750/640	950/950/820
		Bypass mode	Ultra high/High/Low	500/500/440	750/750/640	950/950/820
	External static pressure - 50Hz	Ultra high/High/Low		180/150/110	170/120/80	150/100/70
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low	dBA	38	40	40
				38.5	41	40.5
				39/36	41.5/37.5	41/38
				36.5	38	38.5
				37/33.5	39/34.5	39/35
				34.5	36	36
	35.5	37	36.5			
	Bypass mode	Ultra high/High/Low	dBA	38	40	40
				38.5	41	40.5
				39/36	41.5/37.5	41/38
				36.5	38	38.5
				37/33.5	39/34.5	39/35
34.5				36	36	
35.5	37	36.5				
Operation range	Around unit			°CDB		
	Supply air			°CDB		
	Return air			°CDB		
Refrigerant	Control			Electronic expansion valve		
Connection duct diameter				200	250	
Piping connections	Liquid	Type/OD		Flare connection/6.35		
	Gas	Type/OD		Flare connection/12.7		
	Drain			PT3/4 external thread		
Insulation material				Self-extinguishable urethane foam		
Air filter				Multidirectional fibrous fleeces		
Power supply	Phase/Frequency/Voltage			Hz/V		
				1~/50/220-240		

(1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB

(2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB

(3) Operation sound measured at 1.5m below the center of the unit is converted to that measured in an anechoic chamber, built in accordance with JIS C1502 condition.

(4) The sound level at the air discharge port is about 8-11dB higher than operating sound of the unit. For operation in a quiet room, it is required to take measures to lower the sound, for example install more than 2m soft duct near the air discharge grille.

(5) Air flow rate can be changed to Low mode or High mode.

(6) Normal amplitude, input and efficiency depend on the mentioned conditions.



VKM80-100GM

## SPECIFICATIONS

INDOOR UNIT					VKM50GM	VKM80GM	VKM100GM
Power input - 50Hz	Heat exchange mode	Nom.	Ultra high/High/Low	kW	0.560/0.490/0.420	0.620/0.560/0.470	0.670/0.570/0.480
	Bypass mode	Nom.	Ultra high/High/Low	kW	0.560/0.490/0.420	0.620/0.560/0.470	0.670/0.570/0.480
Fresh air conditioning load	Cooling			kW	4.71 (2)	7.46 (2)	9.12 (2)
	Heating			kW	5.58 (3)	8.79 (3)	10.69 (3)
Temperature exchange efficiency - 50Hz	Ultra high/High/Low			%	76/76/77.5	78/78/79	74/74/76.5
Enthalpy exchange efficiency - 50Hz	Cooling	Ultra high/High/Low		%	64/64/67	66/66/68	62/62/66
	Heating	Ultra high/High/Low		%	67/67/69	71/71/73	65/65/69
Operation mode					Heat exchange mode Bypass mode Fresh-up mode		
Heat exchange system					Air to air cross flow total heat (sensible + latent heat) exchange		
Heat exchange element					Specially processed non-flammable paper		
Humidifier		System			Natural evaporating type		
Casing		Material			Galvanised steel plate		
Dimensions	Unit	HeightxWidthxDepth		mm	387x1,764x832	387x1,764x1,214	
Weight	Unit			kg	102	120	125
Fan	Type				Sirocco fan		
	Air flow rate - 50Hz	Heat exchange mode	Ultra high/High/Low	m <sup>3</sup> /h	500/500/440	750/750/640	950/950/820
		Bypass mode	Ultra high/High/Low	m <sup>3</sup> /h	500/500/440	750/750/640	950/950/820
External static pressure - 50Hz	Ultra high/High/Low		Pa	160/120/100	140/90/70	110/70/60	
Sound pressure level - 50Hz	Heat exchange mode	Ultra high/High/Low		dB(A)	37	38.5	39
					37.5	39	39.5
					38/35	40/36	40/37
					35.5	37	37.5
					36/32	37.5/33	38/34
					33	34	34.5
					34	35.5	35.5
	Bypass mode	Ultra high/High/Low		dB(A)	37	38.5	39
					37.5	39	39.5
					38/35	40/36	40/37
					35.5	37	37.5
					36/32	37.5/33	38/34
					33	34	34.5
					34	35.5	35.5
Operation range	Around unit			°CDB	0°C~40°CDB, 80% RH or less		
	Supply air			°CDB	-15°C~40°CDB, 80% RH or less		
	Return air			°CDB	0°C~40°CDB, 80% RH or less		
Refrigerant					Control		
Connection duct diameter					Electronic expansion valve		
					200	250	
Piping connections	Liquid	Type/OD		mm	Flare connection/6.35		
	Gas	Type/OD		mm	Flare connection/12.7		
	Water supply			mm	6.4		
	Drain				PT3/4 external thread		
Insulation material					Self-extinguishable urethane foam		
Air filter					Multidirectional fibrous fleeces		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		

(1) Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB

(2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB

(3) Humidifying capacity: indoor temp. 20°CDB, 15°CWB; outdoor temperature 7°CDB, 6°CWB

(4) Operation sound measured at 1.5m below the center of the unit is converted to that measured in an anechoic chamber, built in accordance with JIS C1502 condition.

(5) The sound level at the air discharge port is about 8-11dB higher than operating sound of the unit. For operation in a quiet room, it is required to take measures to lower the sound, for example install more than 2m soft duct near the air discharge grille.

(6) For operation in a quiet room, it is required to take measures to lower the sound. For more details, refer to the data book

(7) Air flow rate can be changed to Low mode or High mode.

(8) Normal amplitude, input and efficiency depend on the mentioned conditions.





## ACCESSORIES

		VAM-FA / VKM-GM / VKM-G														
PC board adapter	wiring adapter for electrical appendices	KRP2A61														
	for humidifier (running ON signal output)	KRP50-2														
	for heater control kit	BRP4A50														
	for wiring	indoor unit	FXFQ	FXZQ	FXCQ	FXKQ	FXDQ-M9	FXDQ-P	FXSQ	FXMQ-P7	FXMQ-MA	FXAQ	FXUQ	FXHQ	FXLQ	FXNQ
		reference	-	KRP1B57 <sup>1</sup>	KRP1B61 <sup>1</sup>	KRP1B61	KRP1B56	-	KRP1C64 <sup>4</sup>	KRP1B61	-	KRP4A53	KRP1B3	KRP1B61		
installation box for adapter PCB	KRP1H98 <sup>6</sup>	KRP-1BA101	KRP1B96 <sup>2/3</sup>	-	KRP-1BA101	KRP4A96 <sup>2/3</sup>	-	KRP4A93 <sup>2/3</sup>	KRP1B97	KRP1C93 <sup>4</sup>	-					

### Notes:

1. Installation box is required
2. Up to 2 adapters can be fixed per installation box
3. Only 1 installation box can be installed per indoor unit
4. Up to 2 installation boxes can be installed per indoor unit
5. Installation box is necessary for second adapter
6. Option not available in combination with BYCQ140CGW1



Silencer




Duct adapter

VAM-FA		150	250	350	500	650	800	1000	1500	2000
Replacement for air filter		YAFF323F15	YAFF323F25	YAFF323F35	Ø 200mm	Ø 200mm	Ø 250mm	YAFM323F100	YAFM323F65x2	YAFM323F100x2
Replacement for air filter		-	-	-	YAFM323F50	YAFM323F65	YAFF323F100	YAFF323F65x2	YAFF323F100x2	
Duct adapter	reference	-	-	-	YAFF323F50	YAFF323F65	-	-	YDFA25A1	
	nom. piping diameter	-	-	-	-	-	-	-	Ø 250mm	

VKM-G(M)		50	80	100
Silencer	reference	-	-	KDDM24B100
	nom. piping diameter	-	-	Ø 250mm
High efficiency filter		KAF241G80M	KAF241G100M	
Replacement for air filter		KAF242G80M	KAF242G100M	



# FXMQ-MF - OUTDOOR AIR PROCESSING UNIT

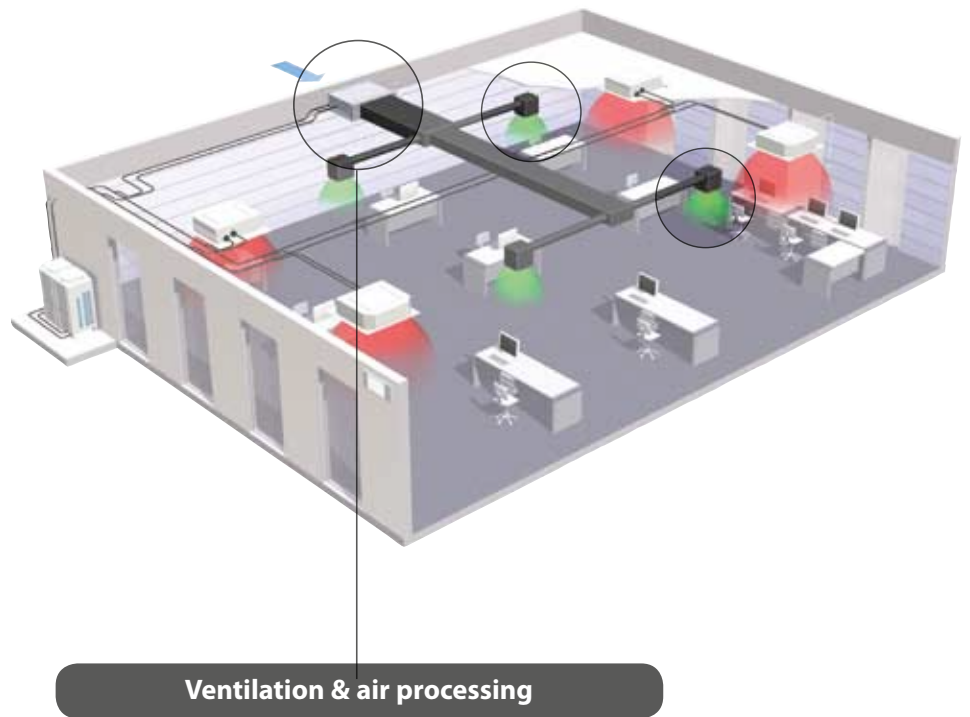

## **Combined fresh air treatment and air conditioning via a single system**

Both fresh air treatment and air conditioning can be achieved successfully in a single system via heat pump technology. This without the usual design problems associated with balancing air supply and discharge. Air conditioning indoor units and an outdoor air processing units can be connected to the same refrigerant circuit, resulting in enhanced design flexibility and a significant reduction in total system costs.

# BENEFITS

## 100% FRESH AIR INTAKE POSSIBLE

Outdoor air processing units can be used exclusively to provide 100% fresh air into the building. Even if only partly used the system reduces the load on the air conditioner by adjusting the outdoor air temperature via fixed discharge temperature control.

## LEAVING MAXIMUM FLOOR AND WALL SPACE FOR FURNITURE, DECORATION AND FITTINGS

## WIDE OPERATION RANGE

The outdoor air processing unit can be installed practically anywhere. The unit operates at outdoor ambients up to 43°C in cooling mode and down to -5°C in heating mode.


## HIGH STATIC PRESSURE

External static pressure (ESP) up to 225 Pa allows the use of extensive ductwork runs and facilitates the use with flexible ducts of varying lengths. Ideal for use in large areas.

## BUILT-IN DRAIN PUMP


A drain pump kit increases the reliability of the drain system <sup>1</sup>

<sup>1</sup> Drain pump kit available as accessory

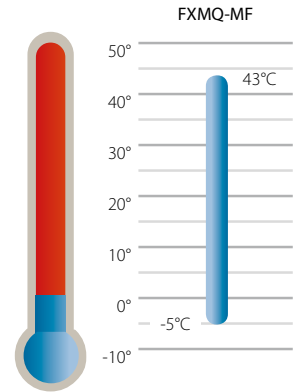

# CONNECTION CONDITIONS

- › The total connected capacity of the standard indoor units and fresh air treatment units must be between 50% and 100% of the capacity of the air conditioning outdoor units. The connected capacity of the fresh air treatment units must not exceed 30% of the capacity of the air conditioning outdoor units.
- › A fresh air treatment unit can also be used exclusively. The connected capacity of the fresh air treatment unit must be between 50% and 100% of the capacity of the air conditioning outdoor unit.
- › Connectable outdoor units:
  - VRV®III Heat pump Optimised for heating (RTSYQ-P)
  - VRV®III Heat pump High COP combination (RXYHQ16-36P8)
  - VRV®III Heat pump Small footprint combination (except 5HP unit) (RXYQ8-54P(A)(8))

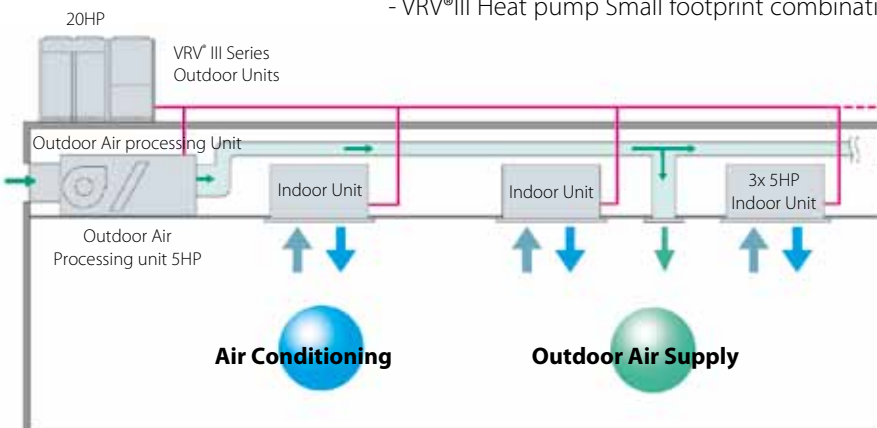

# FXMQ-MF

125, 200, 250

## Outdoor air processing unit, ventilation and air processing



FXMQ200-250MF

## SPECIFICATIONS


				FXMQ125MF	FXMQ200MF	FXMQ250MF	
Capacity	cooling			kW	14.0	22.4	28.00
	heating			kW	8.9	13.9	17.40
Power Input	cooling			kW	0.359	0.548	0.638
	heating			kW	0.359	0.548	0.638
Casing	material			Galvanised steel			
Dimensions	unit	height	mm		470	470	470
		width	mm		744	1380	1380
		depth	mm		1100	1100	1100
Weight	unit			kg	86	123	123
Heat Exchanger	dimensions	nr of rows			3	3	3
		fin pitch	mm		2.00	2.00	2.00
		face area	m <sup>2</sup>		0.28	0.65	0.65
		nr of stages			26	26	26
	fin	fin type			Cross fin coil	Cross fin coil	Cross fin coil
Fan	type		Sirocco fan				
	air flow rate	cooling	medium	m <sup>3</sup> /min	18.0	28.0	35.0
		external static pressure		standard	Pa	185	225
	motor	model			D13/4G2DA1	D13/4G2DA1	D13/4G2DA1
output (high)		W		380	380	380	
drive			Direct drive	Direct drive	Direct drive		
Piping connections	liquid (OD)	type		Flare connection			
		diameter	mm	9.5	9.5	9.5	
	gas	type		Flare connection			
		diameter	mm	15.9	19.1	22.2	
	drain	diameter		mm	PS1B	PS1B	PS1B
heat insulation		Glass fiber					
Air Filter				As option			
Refrigerant				R-410A			
Refrigerant control				Electronic expansion valve	Electronic expansion valve	Electronic expansion valve	
Temperature control				Microprocessor thermostat for cooling and heating	Microprocessor thermostat for cooling and heating	Microprocessor thermostat for cooling and heating	
Safety devices				Fuse			
Safety devices				Fan motor thermal protector			
Power Supply	frequency	Hz		50	50	50	
	voltage	V		220-240	220-240	220-240	

- > Nominal cooling capacities are based on : outdoor temperature : 33°CDB, 28°CWB (68%RH), discharge set temperature : 18°CDB, equivalent piping length 7.5m (horizontal)
- > Nominal heating capacities are based on : outdoor temperature : 0°CDB, -2.9°CWB (50%RH), discharge set temperature : 25°CDB, equivalent piping length 7.5m (horizontal)
- > Capacities are net, including a deduction for cooling (an addition for heating) for indoor fan motor heat.
- > Air filter is not standard accessory, but please mount it in the duct system of the suction side. Select its colorimetric method (gravity method) 50% or more.

## ACCESSORIES

DESCRIPTION			FXMQ125MF	FXMQ200MF	FXMQ250MF
Filters	Long-life replacement filter		KAFJ371L140		KAFJ371L280
	High-efficiency filter	65%	KAFJ372L140		KAFJ372L280
		90%	KAFJ373L140		KAFJ373L280
Filter chamber <sup>1</sup>			KDJ3705L140		KDJ3705L280
Drain pump kit				KDU30L250VE	
Adapter for wiring				KRP1B61	

- <sup>1</sup> Filter chamber has a suction-type flange. (Main unit does not).
- > Dimensions and weight of the equipment may vary depending on the options used.
- > Some options may not be usable due to the equipment installation conditions. Please confirm prior to ordering.
- > Some options may not be used in combination.
- > Operating sound may increase somewhat depending on the options used.

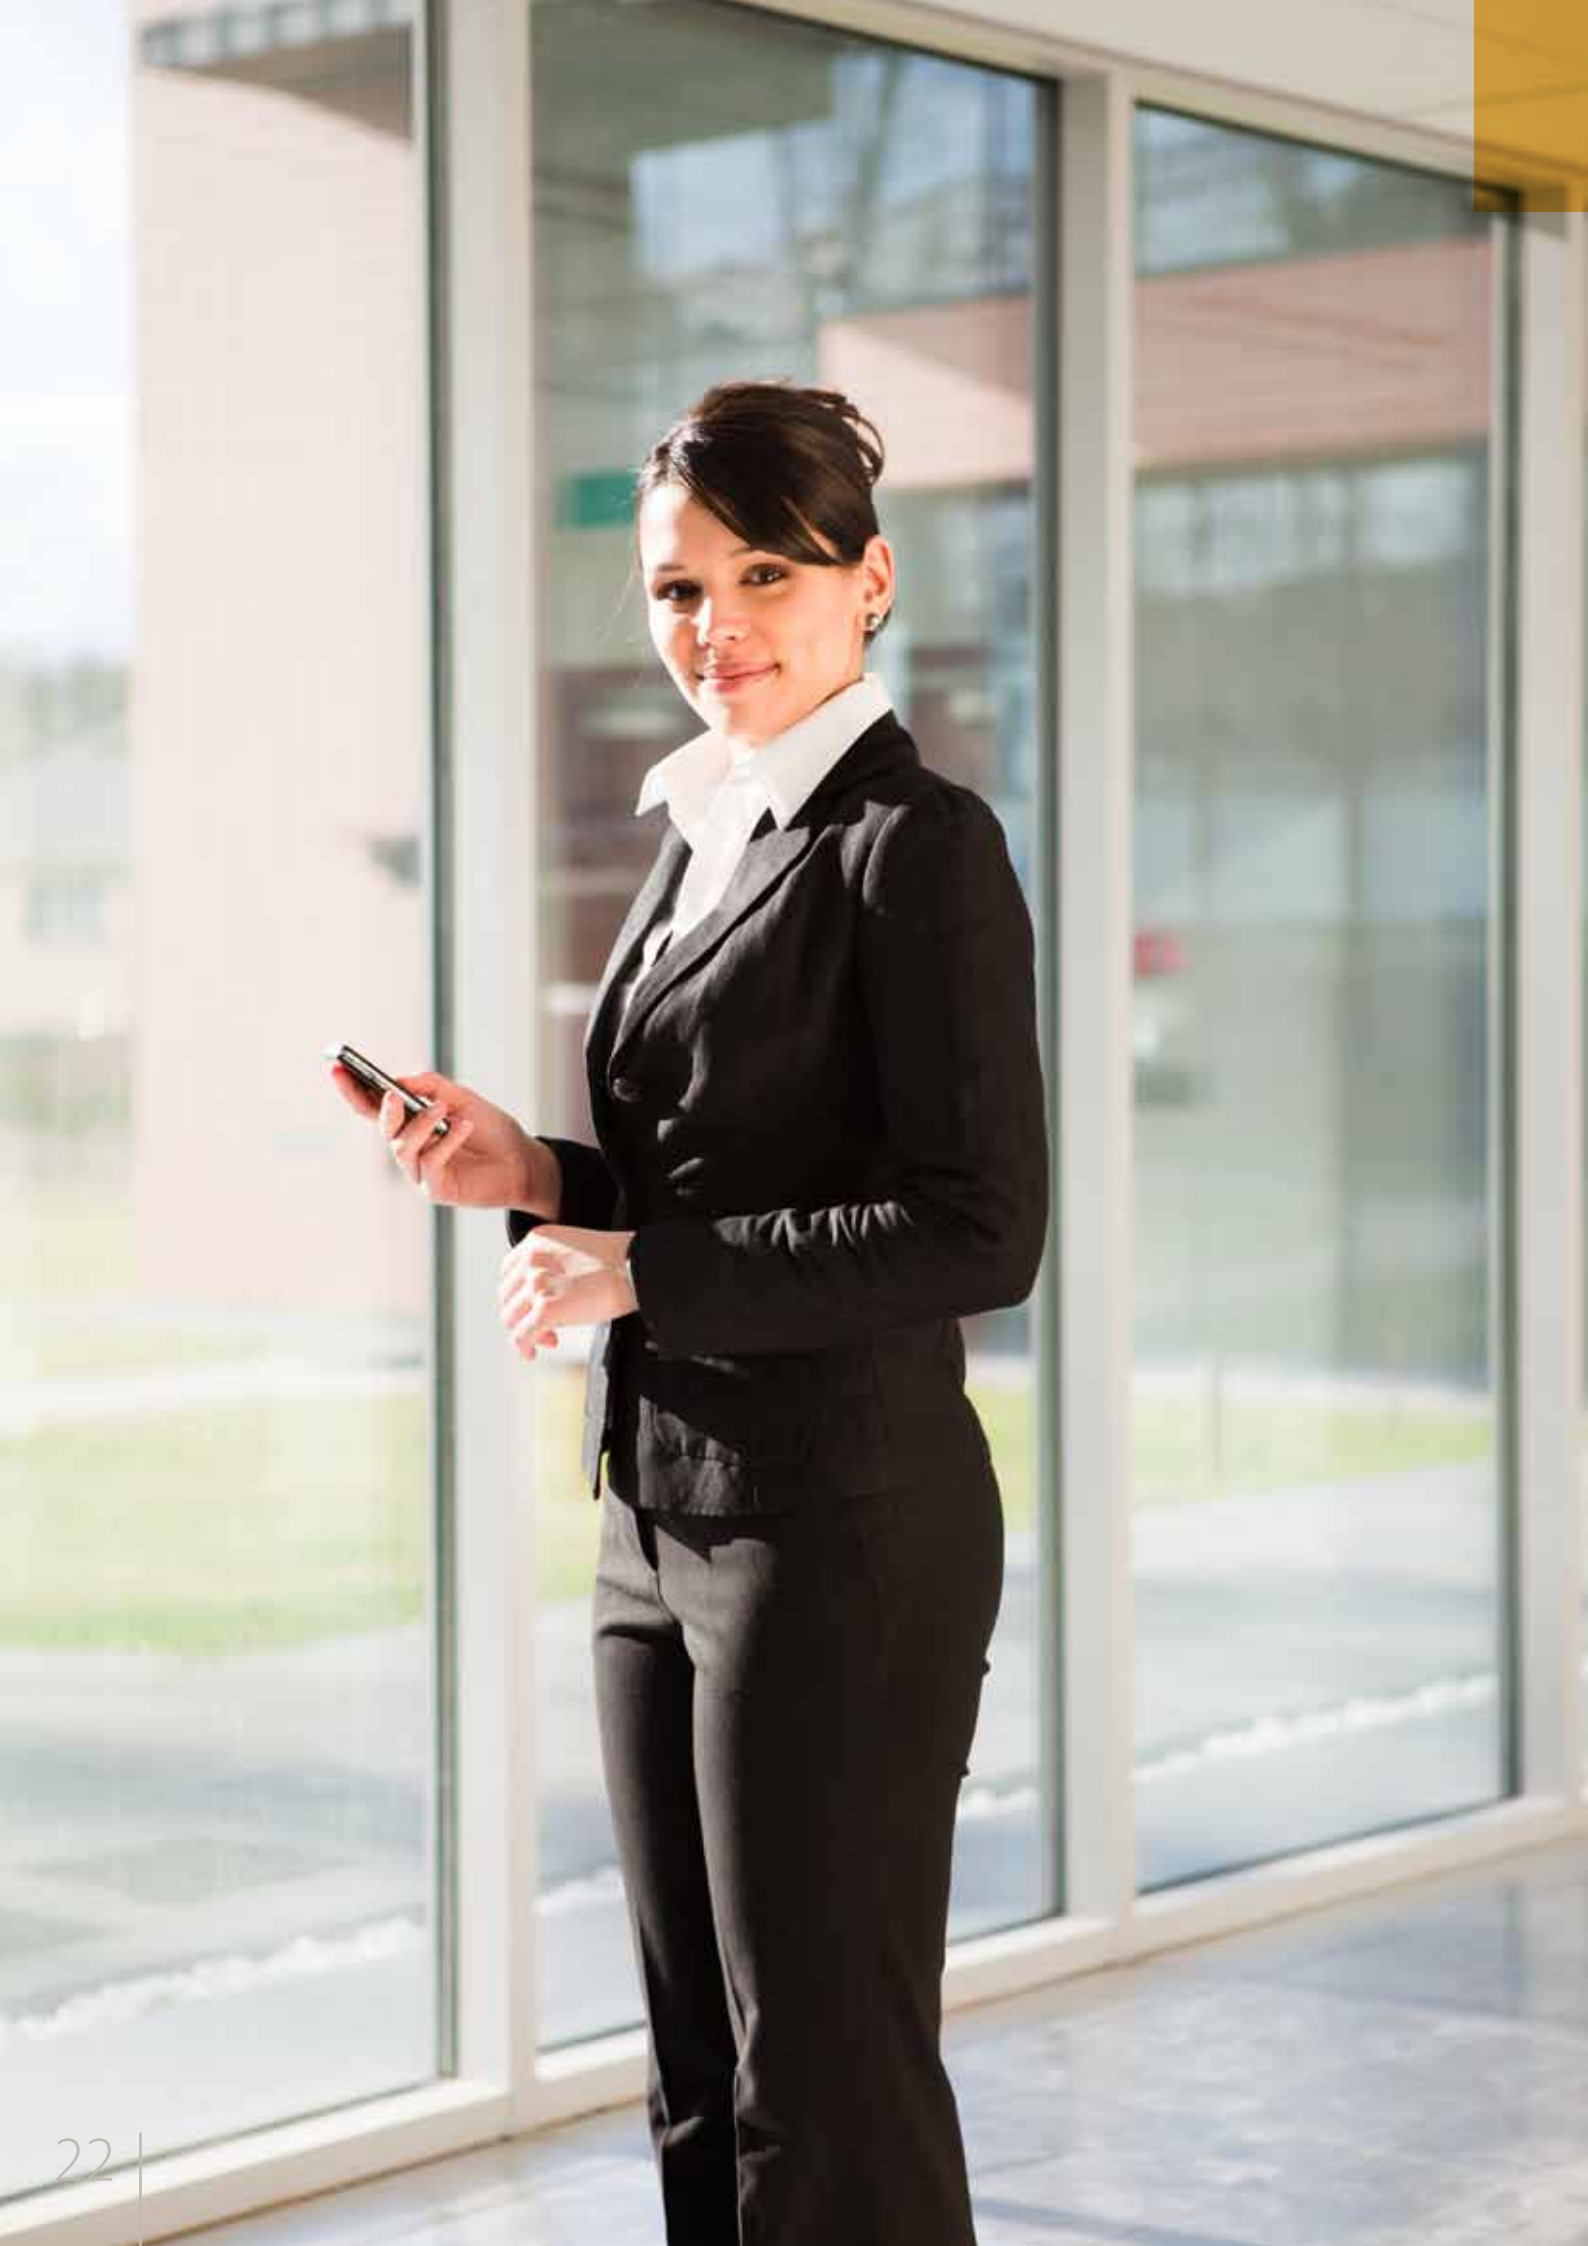


# USER FRIENDLY CONTROL SYSTEMS

## INTERLOCK OF THE VENTILATION OPERATION WITH THE AIR CONDITIONER OPERATION

Interlock of the ventilation operation with the air conditioner operation greatly simplifies overall system control. The same remote control centralizes air conditioning and ventilation operations, obviating any need for ventilation remote control installation work. Using a centralized remote control also frees the user to choose from a wide range of control systems that integrate air conditioning and ventilation. By incorporating a variety of centralized control equipment, the user can build a large, high grade centralized control system.

<sup>1</sup>Linked control of FXMQ-MF and HRV is not supported

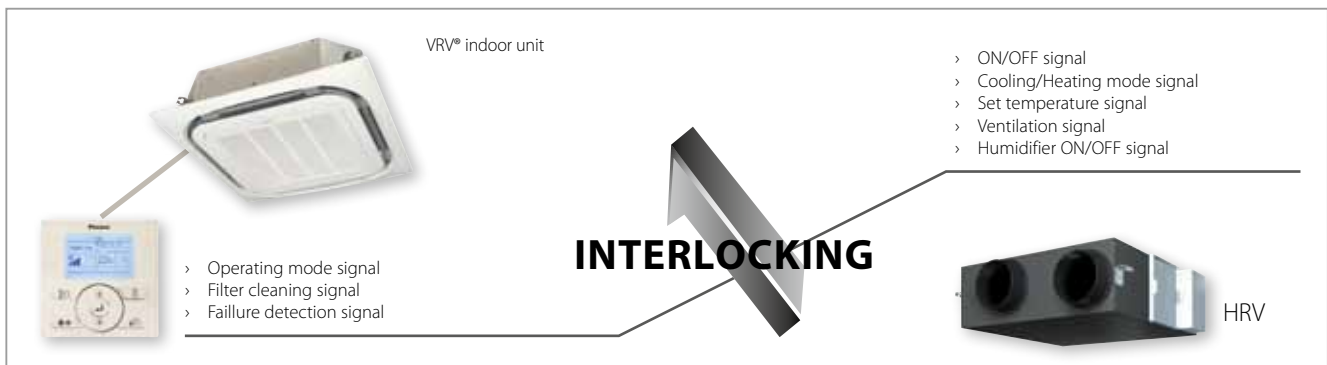


## “SUPER WIRING” SYSTEM

A Super Wiring system is used to enable the shared use of wiring between indoor units, outdoor units and the centralised remote control.

This system makes it easy for the user to retrofit the existing system with a centralised remote control, simply by connecting it to the outdoor units.

Thanks to a non polarity wiring system, incorrect connections become impossible and installation time is reduced.

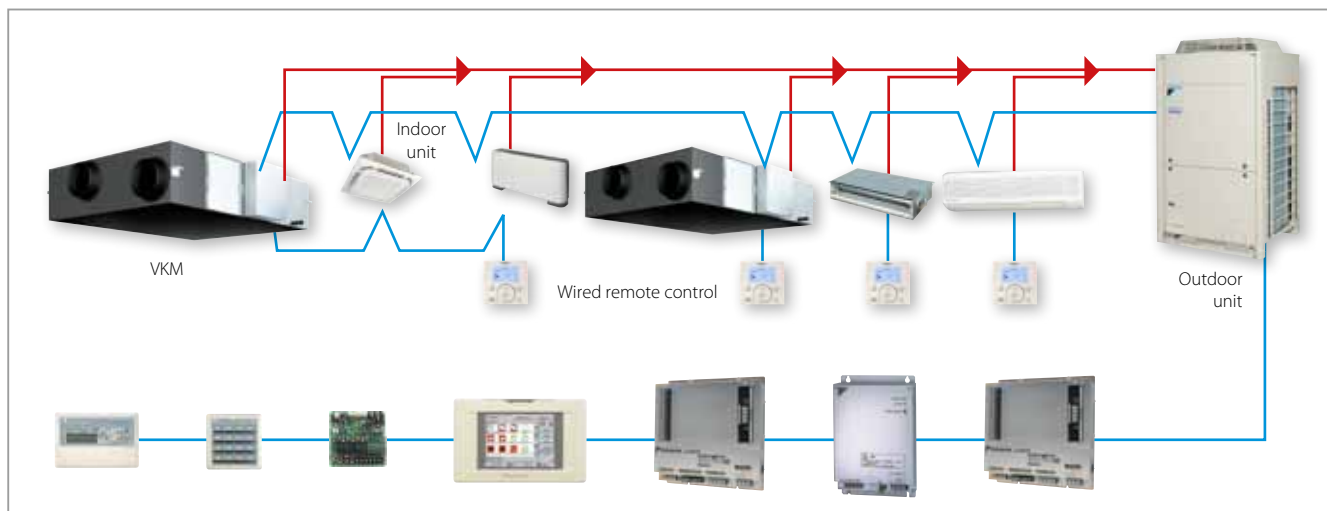

# OVERVIEW OF CONTROL SYSTEMS

## INDIVIDUAL CONTROL SYSTEMS

5 individual control systems give the user control over the VRV® system and the combined ventilation.

- › BRC1D52 and BRC1E51A are wired remote controllers, giving access to room temperature settings, schedule timer, ... Next to that they also have user friendly HRV functions.
- › BRC301B61 is a wired controller especially designed for VAM units.
- › BRC2C51 and BRC3A61 are compact, easy to use remote controllers, ideal for use in hotel bedrooms.



VAM remote control  
BRC301B61



Wired remote control  
BRC1E51A



Wired remote control  
BRC1D52

## CENTRALISED CONTROL SYSTEMS

By combining the (optional) centralised control equipment listed below, the user can achieve a wide range of comprehensive centralised control systems for air conditioning and ventilation.



Centralised  
remote control  
DCS302C51



Unified ON/OFF control  
DCS301B51



Schedule timer  
DST301B51

## NETWORK SOLUTIONS

HRV and the Outdoor Air Processing unit are connectable to all current Daikin network solutions:

**DS-net**

Basic solution for control and management of up to 2,000 indoor units (Sky Air® and VRV®).

**Intelligent Controller**

Allows detailed and easy monitoring and operation of VRV® systems (maximum 2 x 64 control groups).

**Intelligent Manager**

The ideal solution for full control and management of maximum 1,024 VRV® indoor units.

**LonWorks Interface**

Open network integration of VRV® monitoring and control functions into LonWorks® networks.

**BACnet Interface**

Integrated control system for seamless connection between VRV® and BMS systems.

For more information consult the Daikin controls systems brochure or contact your local dealer





DESCRIPTION	HRV	FXMQ-MF
VAM remote control	BRC301B61 <sup>1</sup>	-
Wired air conditioner remote control		BRC1D52 / BRC1E51A
Centralised remote control		DCS302C51
Unified on/off control		DCS301B51
Schedule timer		DST301B51
DS net adapter		DTA113B51
Intelligent touch controller		DCS601C51
Intelligent Manager		DAM602B51/B52
LonWorks interface		DMS504B51
BACnet interface		DMS502A51
Wiring adapter for electrical appendices (1)		KRP2A61
Wiring adapter for electrical appendices (2)	-	KRP4A51



BRC1E51A



BRC1D52



BRC301B61



## INDIVIDUAL CONTROL SYSTEMS

- › Control up to 16 indoor units or 8 HRV units (1 group)
- › Easy to use: all main functions directly accessible
- › Easy setup: improved graphical user interface for advanced menu settings
- › Simultaneous ON/OFF of HRV and air conditioner (BRC1D52/BRC1E51A)
- › Airflow rate switching (initial setting)
- › Ventilation mode switching (initial setting)
- › Self diagnostic functions
- › Filter sign display and reset
- › Timer settings, simultaneous control with air conditioner (BRC1D52/BRC1E51A)
- › ON/OFF of VAM (BRC301B61)
- › Independent operation of HRV
- › Timer settings (BRC301B61)
- › Fresh-up mode switching (HRV only)  
(Selectable: supply rich mode, exhaust rich mode; initial setting)

**Notes:**

The remote control wired to the FXMQ-MF cannot be set as master remote control. Otherwise, when set to 'auto', the operation mode will switch according to outdoor air conditions, regardless of indoor temperature.

## A variety of units can be controlled using only the BRC1D52 or the BRC1E51A (HRV only)

### › Group Control

One air conditioner remote control simultaneously controls up to 16 air conditioning and HRV units.

### › Control using 2 remote controls

Allows control of air conditioning and HRV units from two locations by connecting two air conditioner remote controls. (group control is possible)

### › Long-distance Remote Control

Remote operation control - from a distant control room for example - is possible thanks to wiring of up to 500 m. (2 remote controllers possible)



\*1: Count VKM unit as two air conditioner indoor units. For details, see below.

System construction (HRV only)		System Characteristics	Necessary Accessories																							
Air conditioning interlocked control (VRV®, Sky Air®) system	Independent Operation system	<ul style="list-style-type: none"> <li>› Independent operation of HRV is possible</li> <li>› Operation is possible using 2 remote controls</li> <li>› Multiple HRV units can be simultaneously controlled in batch. (Up to 8 HRV units can be connected)</li> <li>› Air conditioner remote control can be used</li> </ul>	BRC1D52 or BRC1E51A or BRC301B61																							
	Standard system	<p>During group control operation, the VKM unit has a capacity equivalent to 2 standard indoor units. Up to 16 standard indoor units can be connected at the same time.</p> <table border="1"> <tr> <td>Connectable indoor units:</td> <td>VKM</td> <td>0</td> <td>1</td> <td>2</td> <td>3</td> <td>4</td> <td>5</td> <td>6</td> <td>7</td> <td>8</td> </tr> <tr> <td></td> <td>Max.no.of VRV*</td> <td>16</td> <td>14</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>2</td> <td>0</td> </tr> </table> <p>Note: The VKM uses 2 remote controller addresses per unit. The number of units that can be group controlled is shown above.</p>	Connectable indoor units:	VKM	0	1	2	3	4	5	6	7	8		Max.no.of VRV*	16	14	12	10	8	6	4	2	0	<ul style="list-style-type: none"> <li>› Multiple VRV® indoor units or HRV units can be connected and controlled in batches, with interlocked operation of HRV and air conditioners by using the air conditioner remote control.</li> <li>› The HRV unit can also be operated independently using the remote control for the indoor unit, even if the indoor unit is not in operation</li> </ul>	BRC1D52 or BRC1E51A
	Connectable indoor units:	VKM	0	1	2	3	4	5	6	7	8															
	Max.no.of VRV*	16	14	12	10	8	6	4	2	0																
Multiple groups interlocked Operation system		<ul style="list-style-type: none"> <li>› Can control interlocked operation of multiple groups of VRV® or Sky Air® indoor units</li> <li>› When one of the multiple groups operates, HRV units are interlocked and operate simultaneously</li> </ul>	BRC1D52 or BRC1E51A																							

BRC301B61 only available for VAM-FA

Note:

- › Group control is not possible between FXMQ-MF and standard type indoor units. Connect remote controllers to each unit.
- › Not all FXMQ-MF functions are available when using centralised control. Please refer to your local installer for detailed information.
- › The remote control wired to the FXMQ-MF cannot be set as master remote control. Otherwise, when set to 'auto', the operation mode will switch according to outdoor air conditions, regardless of indoor temperature.
- › Temperature setting and PPD are not possible, even when Intelligent Touch Controller or Intelligent Manager are installed.

## DCS302C51



## DCS301B51



## DST301B51



# CENTRALISED CONTROL SYSTEMS

By combining the (optional) centralised control equipment listed below, the user can achieve a wide range of comprehensive centralised control systems for air conditioning and ventilation.

## Centralised remote control - DCS302C51

- › A maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- › A maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- › Group control (up and down buttons are added for group selection)
- › Zone control
- › Malfunction code display
- › Max. wiring length 1,000 m (total : 2,000 m)
- › Combination with unified ON/OFF control, schedule timer and BMS system
- › Airflow volume and direction can be controlled individually for indoor units in each group operation.
- › Ventilation volume and mode can be controlled for Heat Reclaim Ventilation (VKM).
- › Up to 4 'operation/stop' pairs can be set per day by connecting a schedule timer.

## Unified on/off control - DCS301B51

Providing simultaneous and individual control on 16 groups of indoor units

- › A maximum of 16 groups (128 air conditioning indoor and HRV units) can be controlled
- › 2 remote controls in separate locations can be used
- › Centralised control indication
- › Maximum wiring length of 1,000m (total: 2,000m)

## Schedule timer - DST301B51

Enabling 64 groups to be programmed


- › A maximum of 128 air conditioning indoor and HRV units can be controlled
- › 8 types of weekly schedule
- › A maximum of 48 hours back-up power supply
- › Maximum wiring length of 1,000m (total: 2,000m)

### Number of HRV units that can be connected per system

Centralised remote control	2 units
Unified on/off control	8 units
Schedule timer	1 unit

Air Conditioning Interlocked Centralised Control System

Batch / Individual Control System

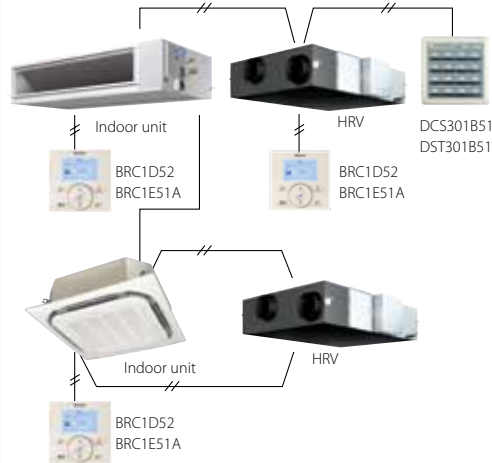

**Unified ON/OFF control - DCS301B51**


- › One controller can control the on/off operation of 16 groups of units collectively or individually
- › Up to 8 controllers can be installed in one centralised transmission line (in one system), which enables control of up to 128 groups. (16 groups x 8 = 128 groups)

**Schedule timer - DST301B51**

- › One schedule timer can control the weekly schedule of up to 128 units
- › HRV remote control can set the individual operation of each HRV unit
- › Control system can be expanded depending on its purposes by combining a variety of centralised control equipment

DCS301B51 or DST301B51, BRC1D52 or BRC1E51A  
If necessary: DCS302C51

Zone Control System

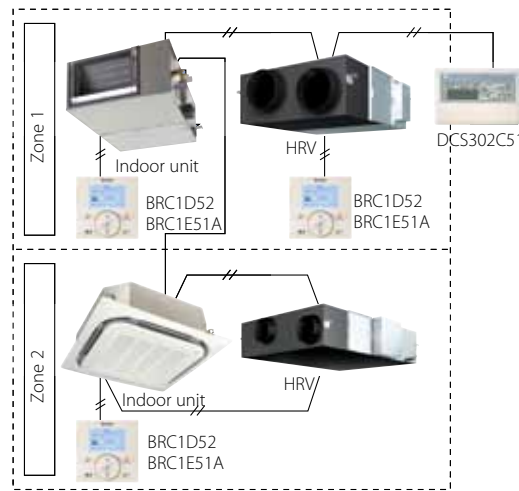


**Centralised remote control - DCS302C51**

- › The centralised remote control provides settings and monitoring functions and can control up to 128 VRV\* and HRV units. A special adapter is required to connect Sky Air\* to the centralised line.
- › Control is possible in 3 different patterns: individual, batch or zone
- › Multiple groups can be controlled within the same zone
- › Multiple HRV units can be operated independently
- › System without air conditioning or HRV remote controls can be constructed
- › Control system can be expanded depending on requirements by combining a variety of centralised control systems

DCS302C51, BRC1D52 or BRC1E51A  
If necessary: DCS301B51 or DST301B51

Combination with other types of air conditioners

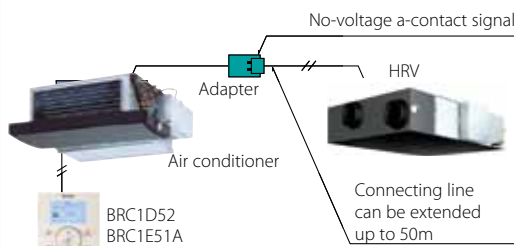

- › Simultaneous operation of HRVs and air conditioners is possible via BRC1D52/ BRC1E51A
- › Use of the HRV remote control enables to change settings or operate HRVs independently

Connection adapter (no-voltage-a-contact-signal)



# ERQ (PAIR) AND VRV® AIR HANDLING APPLICATIONS

For small to large commercial spaces Daikin offers a range of R-410A inverter condensing units for use in conjunction with air handling units. In situations where Daikin commercial range ventilation units cannot satisfy the ventilation requirement due to building constraints (large atriums, banquet halls etc), air handling units represent the ideal solution.

Air handling units provide large fresh air volumes (> 1,000 m<sup>3</sup>/h) and high ESPs enabling the use of extensive ductwork runs.

For more information on Daikin air handling units refer to the air handling unit catalogue.

## BENEFITS OF ERQ AND VRV® AIR HANDLING APPLICATIONS




### HIGH EFFICIENCY

Daikin heat pumps are renowned for their high energy efficiency with COPs up to 4.56 in heating<sup>1</sup>. The VRV® range offers both heat pump and heat recovery units with part load efficiencies as high as 9.02. Integrating the AHU with a heat recovery system is highly effective since an office system can frequently be in cooling mode while the outdoor air is too cold to be brought inside in an unconditioned state. In this case heat from the offices is merely transferred to heat up the cold incoming fresh air. In the absence of an AHU this 'free heating' the incoming fresh air would not be possible.

<sup>1</sup> ERQ100AV1 heat pump

<sup>2</sup> REYQ8P8 50% cooling – 50% heating load. Conditions: outdoor temperature 11°CDB, indoor temperature 18°CWB, 22°CDB

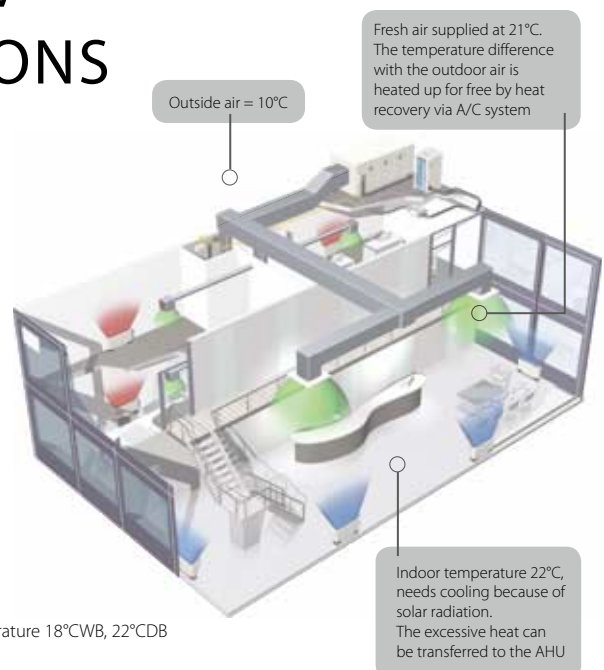

### HIGH COMFORT LEVELS

Daikin ERQ and VRV® units respond rapidly to fluctuations in supply air temperature, resulting in a steady indoor temperature and resultant high comfort levels for the end user.

### EASY DESIGN AND INSTALLATION

The system is easy to design and install since no additional water systems such as boilers, tanks and gas connections etc are required. This also reduces the total system cost.

### TOTAL SOLUTION CONCEPT

Integrating an air handling unit into the total building climate system enables both design and installation procedures to be based on a single common technology. This simplifies project follow-up, installation, commissioning and maintenance since only one party is involved.

# WHICH SYSTEM OFFERS ME THE BEST SOLUTION?

In order to maximise combination potential, Daikin offers 'pair' and 'multi' combination plus several expansion kits and control systems. Control box and expansion valve kits are required for each combination with an air handling unit. Both option kits are designed for indoor and outdoor installation and can be wall mounted.


## I ONLY NEED A CONNECTION TO AN AIR HANDLING UNIT

A solution for your shop, warehouse, showroom or office.

### ERQ heat pump

- > Inverter controlled units
- > Large capacity range (from 100 to 250 class)
- > Heat pump
- > R-410A
- > Flexible control possibilities
- > Wide range of expansion valve kits available

System	Type	4	5	6	8	10
<b>Cooling capacity (kW)</b>		11.2	14.0	15.5	22.4	28.0
<b>Heating capacity (kW)</b>		12.5	16.0	18.0	25.0	31.5
Air-cooled	ERQ-AV1					
	ERQ-AW1					

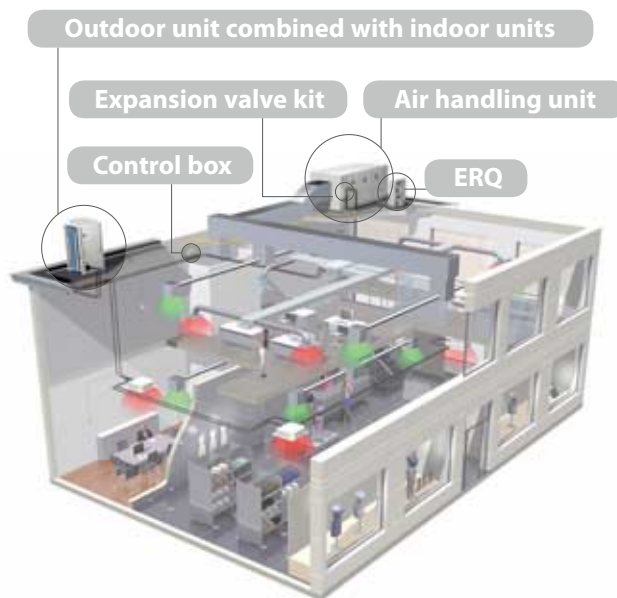

## I NEED AN AIR HANDLING UNIT AND HEATING, AND/OR COOLING


Integrate your air handling unit in a Total solution for your shop or office building.

### VRV® heat recovery / heat pump

- > Inverter controlled units
- > Integrates in all VRV® heat recovery and heat pump systems up to 54 HP
- > Provides virtually free heating for the air handling unit via recovered heat from indoor units in cooling<sup>1</sup>
- > Control of air temperature via standard Daikin wired remote control
- > Large range of expansion valve kits available

<sup>1</sup> In case of connection to a VRV® heat recovery outdoor unit

<sup>2</sup> For more information on VRV® units refer to the VRV® catalogue

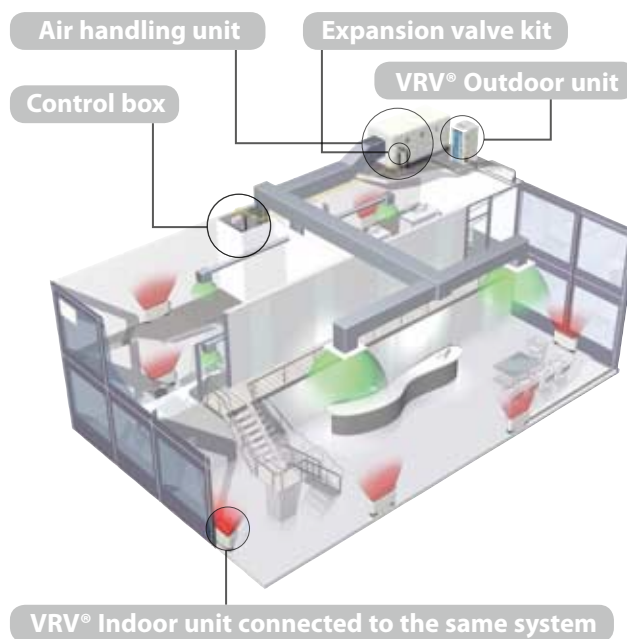


System	Type	4	5	6	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	
<b>Cooling capacity (kW)</b>		11.2	14.0	15.5	22.4	28.0	33.5	40.0	45.0	49.0	55.9	61.5	67.0	71.4	77.0	82.5	89.0	94.0	98.0	105.0	111.0	116.0	120.0	126.0	132.0	138.0	143.0	147.0	
<b>Heating capacity (kW)</b>		12.5	16.0	18.0	25.0	31.5	37.5	45.0	50.0	56.5	62.5	69.0	75.0	81.5	88.0	94.0	102.0	107.0	113.0	119.0	126.0	132.0	138.0	145.0	151.0	158.0	163.0	170.0	
Air-cooled VRV®	Heat recovery																												
	Heat pump																												
Water-cooled VRV®	Heat recovery																												
	Heat pump																												




# SYSTEM OVERVIEW

## Pair application: ERQ

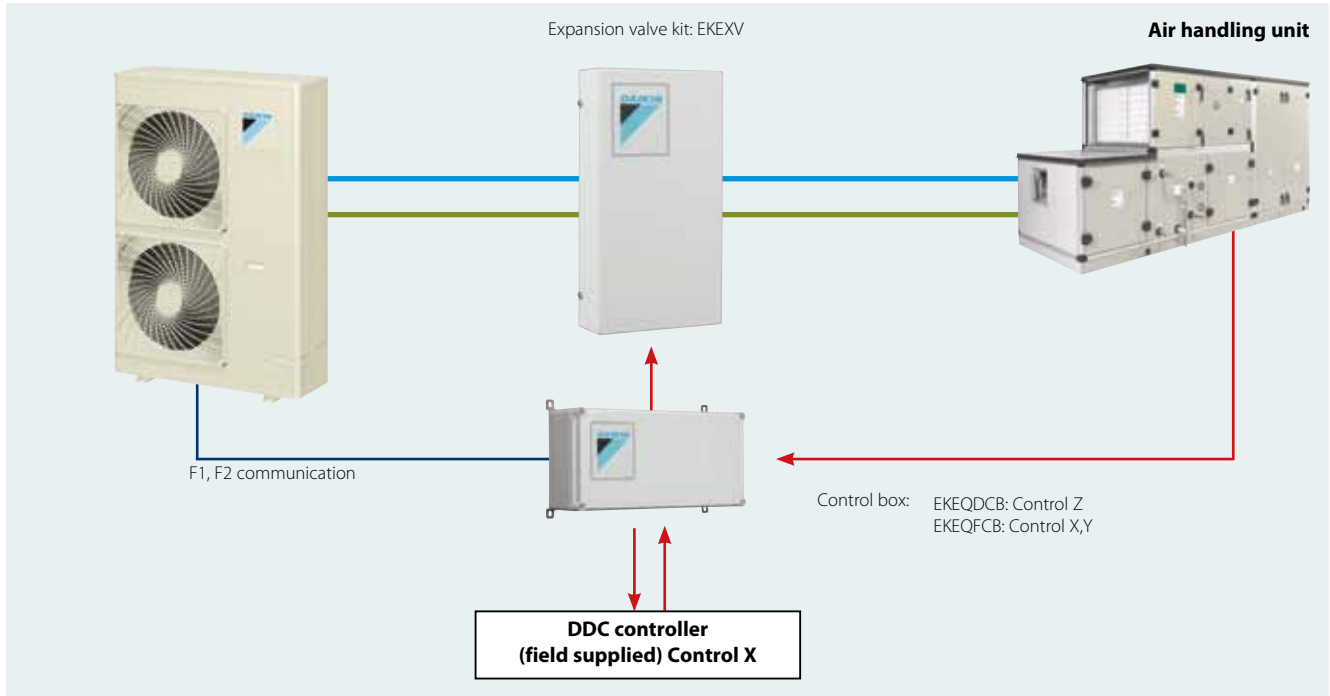

## Multi application: VRV®

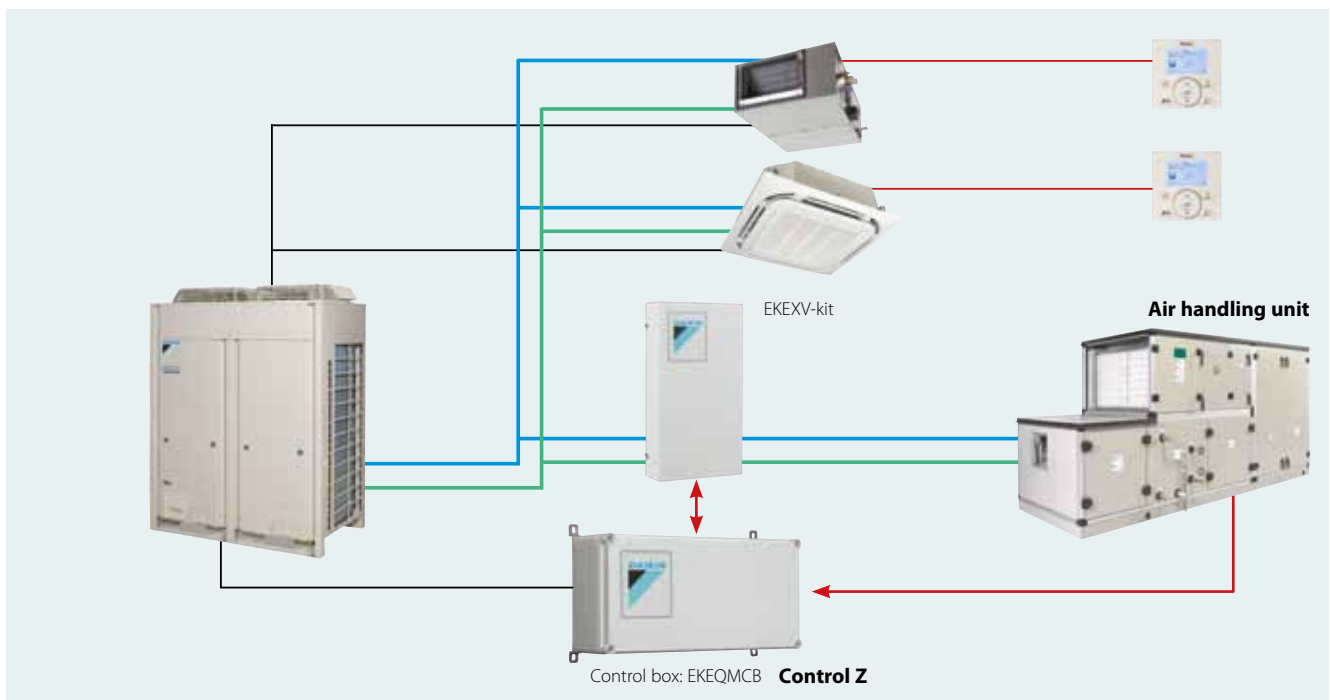

- Daikin communication wire (F1, F2 communication)
- Other communication wire
- Liquid pipe
- Gas pipe


# CONTROL POSSIBILITIES

In order to maximise installation flexibility, 3 types of control systems are offered:

## POSSIBILITY X (TD/TR CONTROL):

### Air temperature control via an external DDC controller (field supplied)


Room temperature is controlled as a function of the air handling unit suction or discharge air (customer selection). The DDC controller is translating the temperature difference between set point and air suction temperature (or air discharge temperature or room temperature) into a reference voltage (0-10V) which is transferred to the Daikin control box (EKEQFCBA). This reference voltage will be used as the main input value for the compressor frequency control.

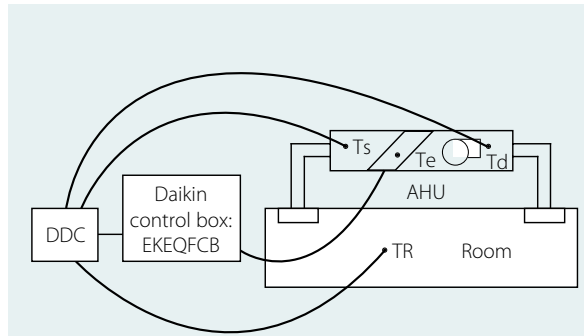

## POSSIBILITY Y (TE/TC CONTROL):

### By fixed evaporating temperature


A fixed target evaporating temperature of between 3°C and 8°C can be set by the customer. In this case, room temperature is only indirectly controlled. The cooling load is determined from the actual evaporating temperature (i.e. load to the heat exchanger). A Daikin wired remote controller (BRC1D52 or BRC1E51A - optional) can be connected for error indication.

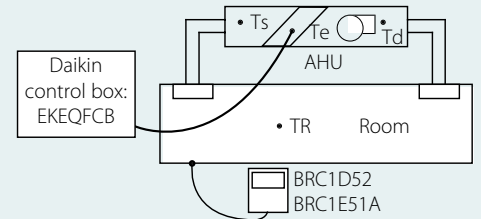

## POSSIBILITY Z (TD/TR CONTROL):

### Using Daikin wired remote controller (BRC1D52 or BRC1E51A - optional)

Set point can be fixed via standard Daikin wired remote controller. Remote ON/OFF can be achieved by an optional adapter KRP4A51. No external DDC controller should be connected. The cooling load is determined from the air suction temperature and set point on the Daikin controller.

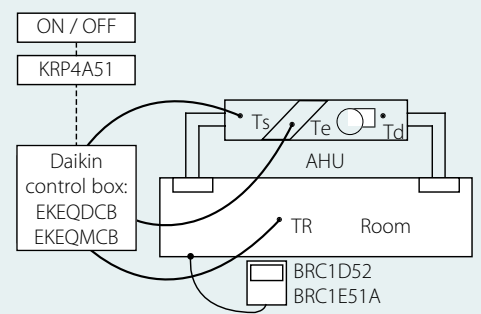

- Ts = Air suction temperature
- Td = Air discharge temperature
- Tr = Room temperature
- Te = Evaporating temperature
- AHU = Air Handling Unit
- DDC = Digital Display Controller

	OPTION KIT	FEATURES
<b>Possibility x</b>		Field supplied DDC controller is required Temperature control using air suction or air discharge temperature
<b>Possibility y</b>	EKEQFCB	Using fixed evaporating temperature, no set point can be set using remote controller
<b>Possibility z</b>	EKEQDCB EKEQMCB*	Using Daikin wired remote controller BRC1D52 or BRC1E51A Temperature control using air suction temperature

\* EKEQMCB (for 'multi' application)



# SELECTION OF AIR HANDLING UNITS

## PAIR APPLICATION

### Step 1: Select required capacity of AHU

Based on the required capacity of the AHU please select the expansion valve

EKEXV class	Allowed heat exchanger volume (dm <sup>3</sup> )		Step 1 Allowed heat exchanger capacity in cooling (kW)			Allowed heat exchanger capacity in heating (kW)		
	Minimum	Maximum	Minimum	Standard	Maximum	Minimum	Standard	Maximum
63	1.66	2.08	6.3	7.1	7.8	7.1	8.0	8.8
80	2.09	2.64	7.9	9.0	9.9	8.9	10.0	11.1
100	2.65	3.3	10	11.2	12.3	11.2	12.5	13.8
125 ←	3.31	4.12	12.4	14.0	15.4	13.9	16.0	17.3
140	4.13	4.62	15.5	16.0	17.6	17.4	18.0	19.8
200	4.63	6.6	17.7	22.4	24.6	19.9	25.0	27.7
250	6.61	8.25	24.7	28.0	30.8	27.8	31.5	34.7

Heat exchanger capacity is defined under following conditions:  
 Saturated suction temperature (SST) = 6°C, Superheat (SH) = 5K  
 Subcool condensor (SC) = 3K  
 Air temperature = 27°CDB/19°CWB

Eg: If you need 14kW in cooling, you will require an expansion valve of 125class (EKEXV125).

The heat exchanger capacity has priority over the volume of the heat exchanger and is therefore the determining factor for the selection of the expansion valve. More information on the volume can be found in the data book and service manual.

### Step 2: Select outdoor unit

Pair combinations with ERQ outdoor units are possible based on the same principle as standard DX units. The capacity of the AHU unit is indicated by the capacity of the expansion valve and can be connected as indicated in below table.

OUTDOOR UNIT		CONTROL BOX		Step 2 EXPANSION VALVE KIT							
		Control z	Control x or y	Class 63	Class 80	Class 100	Class 125	Class 140	Class 200	Class 250	
		EKEQDCB	EKEQFCB	EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250	
ERQ	1~	ERQ100AV1	P	P	P	P	P	P	-	-	-
		ERQ125AV1	P	P	P	P	P	P	P	-	-
		ERQ140AV1	P	P	-	P	P	P	P	-	-
	3~	ERQ125AW1	P	P	P	P	P	P	P	-	-
		ERQ200AW1	P	P	-	-	P	P	P	P	P
		ERQ250AW1	P	P	-	-	-	P	P	P	P

P: Pair, combination depending on AHU coil volume and capacity

Eg: Based on above selected expansion valve, the EKEXV125 has a capacity of class 125. Therefore we can choose to connect it in pair with all outdoor units indicated in the table above with P.

### Step 3: Control box selection

Please make your selection of the control box based on your requirements. All the different control possibilities are mentioned on page 34.

More information on the selection is available in the service manual.

## MULTI APPLICATION

### Step 1: Select required capacity of AHU

Based on the required capacity of the AHU please select the expansion valve

EKEXV class	Step 1							
	Allowed heat exchanger volume (dm <sup>3</sup> )		Allowed heat exchanger capacity in cooling (kW)			Allowed heat exchanger capacity in heating (kW)		
	Minimum	Maximum	Minimum	Standard	Maximum	Minimum	Standard	Maximum
50	0.76	1.65	5.0	5.6	6.2	5.6	6.3	7.0
63 <	1.66	2.08	6.3	6.9	7.8	7.1	8.0	8.8
80	2.09	2.64	7.9	9.0	9.9	8.9	10.0	11.1
100	2.65	3.3	10	11.2	12.3	11.2	12.5	13.8
125	3.31	4.12	12.4	14.0	15.4	13.9	16.0	17.3
140	4.13	4.62	15.5	16.0	17.6	17.4	18.0	19.8
200	4.63	6.6	17.7	22.4	24.6	19.9	25.0	27.7
250	6.61	8.25	24.7	28.0	30.8	27.8	31.5	34.7

Eg: If the required capacity of the AHU is 6.9kW in cooling, which lies between 6.3 and 7.8, the EKEXV63 can be selected.

The heat exchanger capacity has priority over the volume of the heat exchanger and is therefore the determining factor for the selection of the expansion valve. More information on the volume can be found in the data book and service manual.

### Step 2: Select outdoor unit

Multiple AHU can be connected to a VRV® system and the connection principle is similar as for ERQ. Connection of the full system can be up till 110% including at least 1 Daikin indoor unit (cassette, duct, ...) The capacity index of the AHU needs to be calculated based on the indicated capacity of the selected expansion valve and the actual capacity.

The AHU capacity index = capacity class (expansion valve) \* ratio (actual capacity AHU / standard capacity expansion valve)

Eg: AHU has a capacity requirement of 6.9kW and the selected expansion valve is the EKEXV63 with a standard capacity of 7.1kW. So the AHU capacity = 63 \* (6.9kW / 7.1kW) = 61 class

In case that in the system 2 FXSQ50 class are connected, the total sum of capacity would be 61 + 2\*50 = 161 class  
Based on the 161 class a 10 HP is required as outdoor unit.

<sup>1</sup> For detailed specifications of VRV® outdoor units, refer to the VRV® catalogue or databooks

### Step 3: Control box selection

EKEQMCB is the control box which is required to control the communication between the AHU and the VRV® system beside the standard communication of the Daikin DX indoor units (cassette, duct, wall...).

More information on the selection is available in the service manual.

### SPECIFICATIONS

OUTDOOR UNIT				ERQ100AV1	ERQ125AV1	ERQ140AV1	ERQ125AW1	ERQ200AW1	ERQ250AW1
Capacity range		HP		4	5	6	5	8	10
Cooling capacity	Nom.	kW		11.2 (1)	14.0 (1)	15.5 (1)	14.0 (1)	22.4 (1)	28.0 (1)
Heating capacity	Nom.	kW		12.5 (2)	16.0 (2)	18.0 (2)	16.0 (2)	25.0 (2)	31.5 (2)
Capacity control	Cooling	Min./Max.	%	24/100			100		
Power input	Cooling	Nom.	kW	-			3.52 (1)	5.22 (1)	7.42 (1)
	Heating	Nom.	kW	-			4.00 (2)	5.56 (2)	7.70 (2)
EER				3.99 (1)		3.42 (1)	3.98 (1)	4.29 (1)	3.77 (1)
COP				4.56 (2)	4.15 (2)	3.94 (2)	4.00 (2)	4.50 (2)	4.09 (2)
Casing	Material			Painted galvanized steel plate			Painted galvanized steel plate		
Dimensions	Unit	HeightxWidthxDepth	mm	1,345x900x320			1,680x635x765	1,680x930x765	
Weight	Unit		kg	120			159	187	240
Fan	Type			Propeller			Propeller		
	Air flow rate	Cooling	Nom.	m <sup>3</sup> /min	106			95	171
		Heating	Nom.	m <sup>3</sup> /min	102	105	95	171	185
Sound power level	Cooling	Nom.	dB(A)	66	67	69	72	78	
Sound pressure level	Cooling	Nom.	dB(A)	50	51	53	54	57	58
	Heating	Nom.	dB(A)	52	53	55	-		
Compressor	Model			JT100G-VDL			Inverter		
	Type			Hermetically sealed scroll compressor			Hermetically sealed scroll compressor		
Compressor 2	Model			-			-	ON - OFF	
	Type			-			-	Hermetically sealed scroll	
Operation range	Cooling	Min.~ Max.	°CDB	-5~ 46			-5~ 43		
	Heating	Min.~Max.	°CWB	-20~15.5			-20~15		
Entering air temperature on AHU heat exchanger	Cooling	Min.~ Max.	°CDB	-14CWB~25CWB			35°CDB		
	Heating	Min.~Max.	°CWB	10CWB~27CWB			10CWB~27CWB		
Refrigerant	Type			R-410A			R-410A		
	Charge		kg	4.0			6.2	7.7	8.4
Refrigerant oil	Control			Expansion valve (electronic type)			Electronic expansion valve		
	Type			Daphne FVC68D			Synthetic (ether) oil		
	Charged volume		l	1.5			1.7	2.1	4.3
Piping connections	Liquid	Type/OD	mm	Flare connection/9.52			Braze connection/9.52		
	Gas	Type/OD	mm	Flare connection/15.9		Braze connection/19.1	Braze connection/15.9	Braze connection/19.1	Braze connection/22.2
	Drain	Quantity/OD	mm	3/26x3			-		
	Piping length	Max.	OU - IU	m	55			55	
	Heat insulation			Both liquid and gas pipes			Both liquid and gas pipes		
Power supply	Phase/Frequency/Voltage		Hz/V	1N~/50/220-440			3N~/50/400		

- (1) Cooling: indoor temp. 27°CDB, 19°CWB; outdoor temp. 35°CDB; equivalent piping length: 7.5m (horizontal); level difference: 0m
- (2) Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 7.5m; level difference: 0m
- (3) Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings.
- (4) Sound values are measured in a semi-anechoic room.
- (5) Sound pressure level is a relative value, depending on the distance and acoustic environment. For more details, please refer to the sound level drawings.


### EKEXV

### Control box



INDOOR UNIT				EKEXV50	EKEXV63	EKEXV80	EKEXV100	EKEXV125	EKEXV140	EKEXV200	EKEXV250
Casing	Material			Metal							
Dimensions	Unit	HeightxWidthxDepth	mm	401x215x78							
Weight	Unit		kg	2.9							
Sound pressure level	Nom.		dB(A)	45							
Operation range	Cooling	Min.~ Max.	°CDB	-5.0~ 46.0							


- (1)The sound pressure value is the maximum value measured at 10cm from the motor.(2)Minimum and maximum piping length refer to the piping between the expansion valve kit (EKEXV) and the air handling unit(3)Equivalent piping length: refer to the capacity connection ratio of the outdoor unit; depends on outdoor unit(4)Maximum installation height difference: See manual; depends on outdoor unit



Visit [www.eca.gov.uk/etl](http://www.eca.gov.uk/etl) and type 'Daikin' in the quick search box for details of the latest ECA qualifying Daikin units



Daikin Europe N.V. participates in the Eurovent Certification Programme for Air Conditioners (AC), Liquid Chilling Packages (LCP) and Fan Coil Units (FC); the certified data of certified models are listed in the Eurovent Directory. Multi units are Eurovent certified for combinations up to 2 indoor units. VRV products, Rooftops, FWB-J and FWD-units are not within the scope of the Eurovent Certification Programme.



Daikin units comply with the European regulations that guarantee the safety of the product.

Daikin products are distributed by:

The present catalogue is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this catalogue to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this catalogue. All content is copyrighted by Daikin UK.

**Daikin Airconditioning UK Limited** The Heights Brooklands Weybridge Surrey KT13 0NY Tel 0845 6419000 Fax 0845 6419009 [www.daikin.co.uk](http://www.daikin.co.uk)

<b>Scotland Region</b> 0845 641 9330	<b>Northern Region</b> 0845 641 9340	<b>Midlands Region</b> 0845 641 9370	<b>Western Region</b> 0845 641 9320	<b>North London</b> 0845 641 9360	<b>South London</b> 0845 641 9355
---	---	---	--	--------------------------------------	--------------------------------------