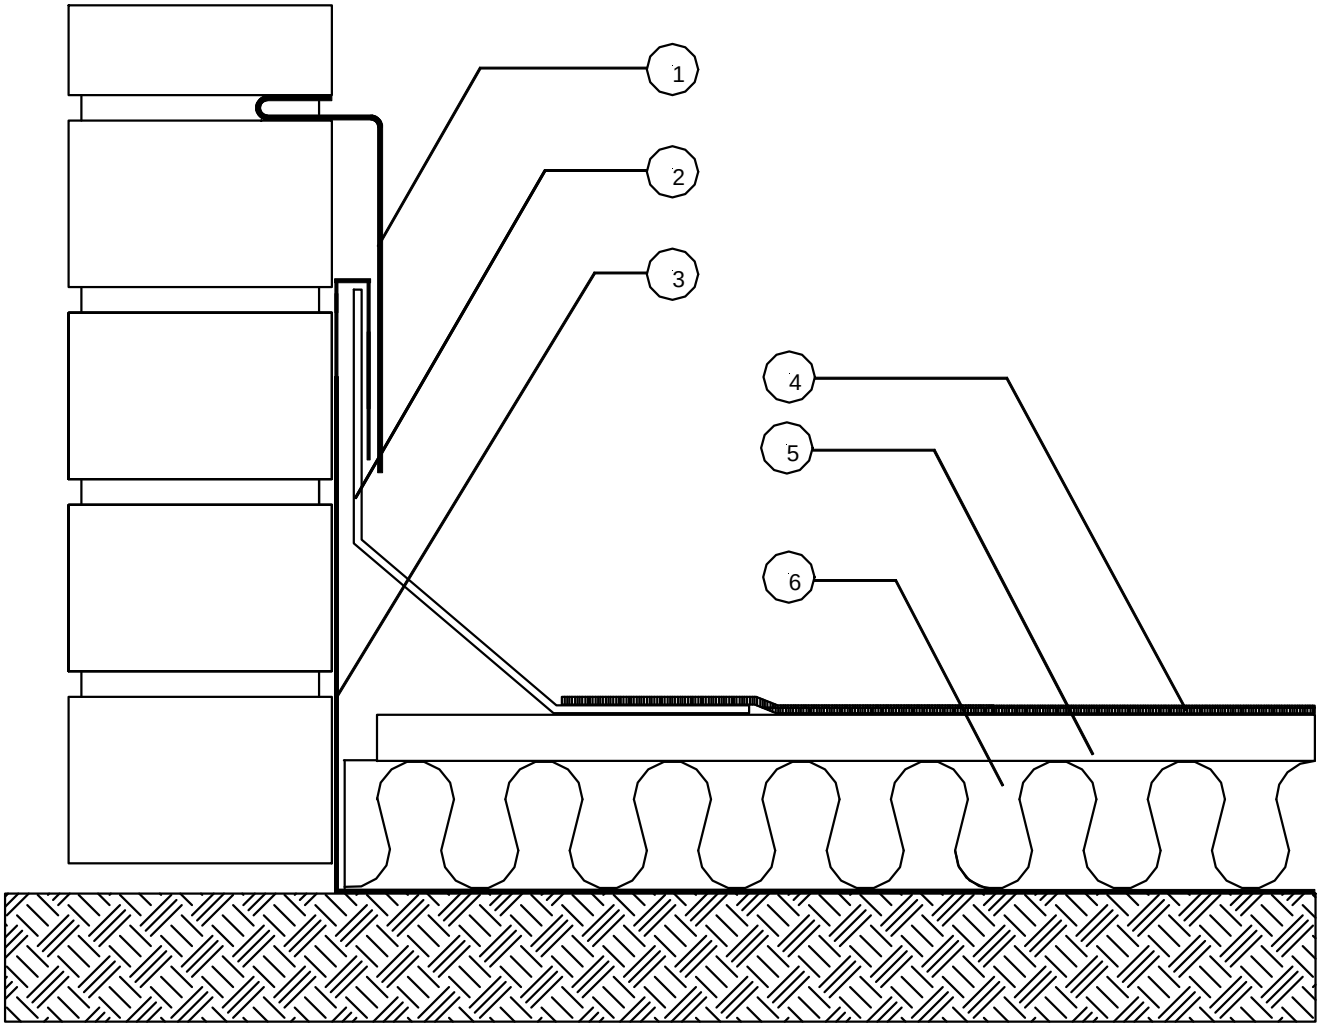

1. Flashing (Lead or GRP)
2. Fillet trim
3. Vapour Control Layer
4. Polyroof 185 membrane
5. Plywood WISA / Finnforest II/III
6. PUR Insulation
   eg Kingspan Thermaroof TR26

NOTES

a. Flashing can be either lead or GRP

b. As per standard building practice, care must be taken positioning the flashing with regard to any cavity tray.

c. On balconies the fillet trim may be substituted with a reverse right angle trim. Ref Fig 2.07.

d. A temporary or secondary seal may be achieved by applying a bead of silicon sealant to the back of the fillet trim.

e. It should be noted that flashing details are not covered by the Polyroof guarantee

Polyroof Products Limited
Furness House
Castle Park Industrial Estate
Flint
Flintshire
CH6 5XA

Tel : 01352 735 135
Fax : 01352 735 182
email : technical@polyroof.co.uk
web : www.polyroof.co.uk

Reference			
Fig 2.08			
Title			
Wall Abutment (Fillet Trim)			
Scale	Drawn By	Date	
N.T.S.	S.H	24/11/2008	Polyroof 185 System