




## Fire Rated Mailboxes

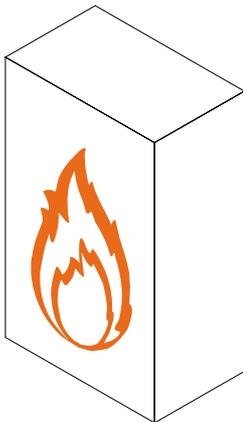



The Safety Letterbox Company in association with the Fire Research Laboratory worked together to create a range of 1 hour fire rated (integrity only) mailboxes.

Particularly suitable when mailboxes can only be positioned within a designated fire escape route or banked in a post room which must be fire rated.


The products in this section were required to satisfy the integrity criteria given in BS476 Part 22 1987 Clause 8 for a period of 60 minutes.

In addition to the above, the mailboxes can be further enhanced by applying a finish which would conform to London Underground surface spread of flame requirement BS476 Part 6 & 7.

## Fire Rated Steel PPC

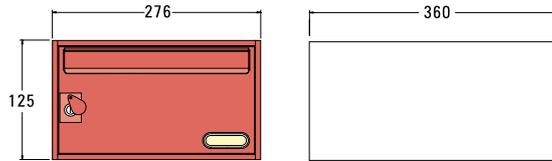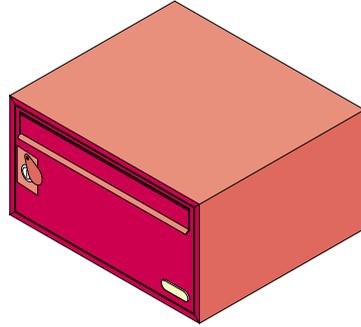

*Fire Rated Steel Horizontal*

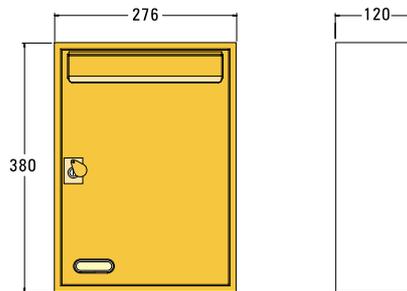

*Fire Rated Steel Vertical*

- Manufactured from galvanised steel finished with an architectural grade powder coating. Can also comply to London Underground surface spread of flame specification
- Strategically placed intumescent closures
- Suitable for domestic and commercial use
- For interior application
- Single unit weight 4k
- Suitable for surface fixing, free standing wall recessing and panel fixing
- Can be manufactured in banks to suit required configurations and client requirements
- Special fire rated locking mechanism
- Vandal resistant
- Our technical department will consider each site requirement individually

