



For more information on Junckers Ltd visit www.barbourproductsearch.info

Floor Finishes for Professionals

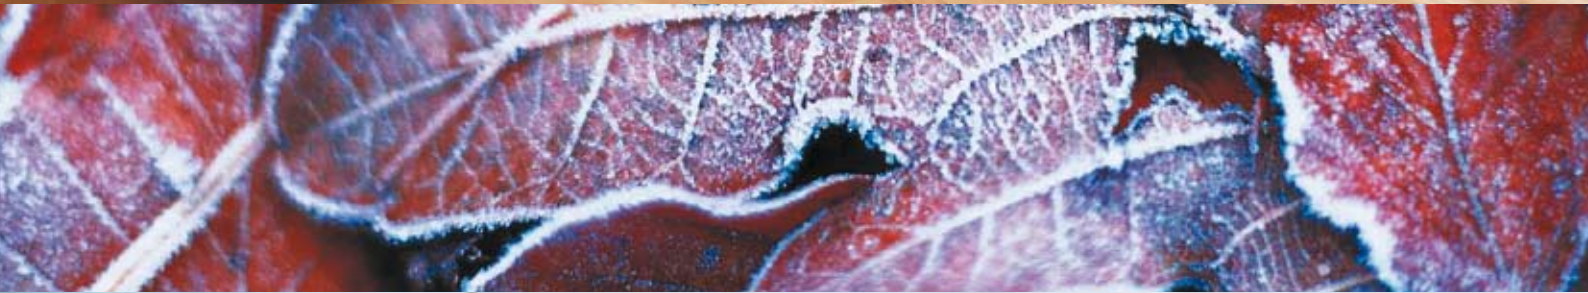

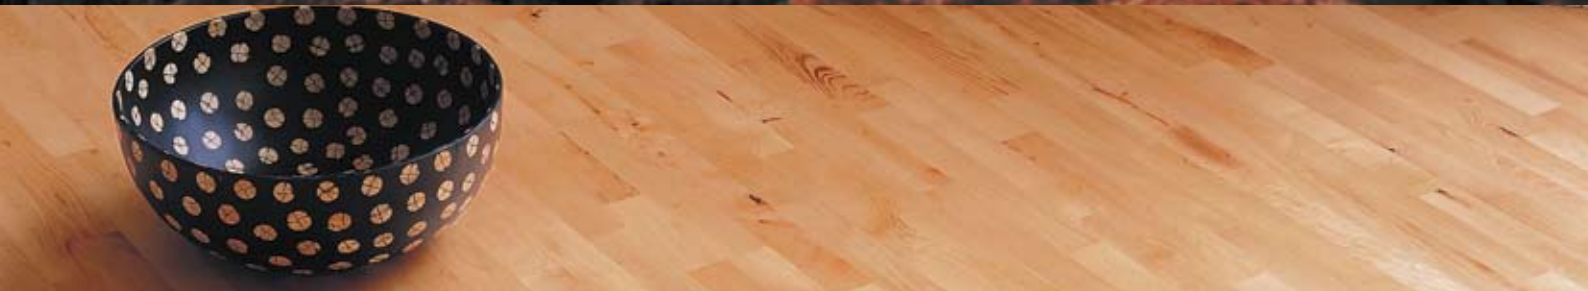

At JUNCKERS we have long experience with wood. Today we are Europe's leading producer of solid hardwood floors and we have delivered more than 100 million square metres of wooden floors to housing, shops, restaurants, hotels, offices and sports halls all over the world.

JUNCKERS has been producing JUNCKERS floor lacquers and other floor finishes since the mid-1950s, today ranking among the leading producers of floor lacquers, floor oils and oils for worktops.

Contact us directly or visit us at www.junckers.com

Distributor



Junckers Ltd. Unit a, 1 Wheaton Road Witham, Essex CM8 3UJ
tel: +44 1376 534700 - fax: +44 1376 514401 - www.junckers.com

Junckers Industrier A/S - First Floor, Greenhills Retail Park - Greenhills Road, Tallaght, Dublin 24, Ireland
Ph: 00353 1 4622580 - Fax: 00353 1 4636688

JUNCKERS

Nobody does it better

Nobody knows more about wooden flooring and how to treat wooden floors than JUNCKERS. Therefore, you are sure to get the best results by using floor finishes from Junckers, Europe's largest producer of solid hardwood flooring. With more than 50 years' experience as a producer of lacquers and oils, today we can offer our customers a complete line of products for surface treatment and maintenance. This allows us to meet the high requirements for floor finishes, any time, any place. Our product development department continually tests new products, another reason why the popularity of our famous hardwearing surfaces never fades.

Your professional partner

We aim to provide our customers with optimum service and to maintain our position as a professional cooperative partner. To ensure we achieve this goal, we constantly develop our products and listen closely to our customers' needs and wishes.

Individual benefits

JUNCKERS has to be easy to use! Therefore, we have adapted our product range so that you can always find products suited to your local environmental regulations, climatic conditions, traditions and work methods. We can send you labels, directions for use, technical data sheets and safety instructions, thus allowing you to feel safe and secure when using JUNCKERS floor finishes.

Advice and guidance

JUNCKERS is never more than a telephone call away! We are always at your service, ready to guide you on the choice of products, application, use and additional treatment. We answer all questions regarding JUNCKERS floor finishes in a precise and professional manner.

Personal service

With close dialogue and personal relations, we make your needs and wishes our key to providing the highest quality products and advice on the market. We will be happy to call on you and advise you on how our floor finishes can meet your requirements. Call us today and arrange a visit!



Mohair-roller



Airless spray



Cloth



Floor polisher



Brush



Spatula



Mop




















Squeegee / PADCO applicator

Our 1 and 2-component special lacquers such as Isolak and the High Performance range, are particularly suitable for high traffic areas and sports floors, and have been specifically developed for the professional user. Some key words are: High wear resistance, attractive appearance and easy application.		
	Basefill	BasePrime
Type:	Solvent-based filler (VOC 2007 Conformant).	Solvent base primer.
Use:	Solvent based filler to be mixed with sanding dust for filling gaps in floors up to 2 mm wide. For gaps over 2 mm add Gypsum (Contact Junckers for details).	Very fast curing primer for wooden floors where water based primers cannot be used due to poor adhesion. Ideal for exotic timbers. Clear finish.
Mixing Proportions:	N/A	N/A
Gloss:	N/A	N/A
Coverage:	Approx. 10 m ² /litre	Approx. 10 m ² /litre
Drying time at 20°C and 60% RH:	Approx. 20-90 min.	Approx. 15 minutes
Maximum hardness time-Ready for use:	24 hours	30 minutes
Pot life/shelf life in unopened container:	Min. 1 year	Min. 1 year
Number of coats normally required	1 coat	1 coat
Package sizes:	5 litres	5 litres
Application:		

JUNCKERS

Professional Lacquers

				
Pro Seal	Professional 625	Pro Tech	Isolacquer	Iso Line
Urethane oil based primer (VOC 2007 Conformant).	2 component acid curing lacquer (VOC 2007 Conformant).	1 component oil-based lacquer for residential and commercial use.	2 component 100% polyurethane lacquer (VOC 2007 Conformant).	2 component 100% polyurethane line marking paint (VOC 2007 Conformant).
Primer for Junckers Ultra Matt and water based lacquers. Gives depth of colour to hardwood.	Fast drying, good alcohol resistant seal for residential and low traffic commercial uses.	Easy to apply. Provides natural lustre of an oil with the low maintenance, durability and easy application of a lacquer.	Extremely durable seal, ideal for sports and high traffic areas. Conforms to DIN and EN 14904 sports standards.	For line marking sports flooring.
N/A	25 parts of lacquer/ 1 part of hardener	-	1 part of lacquer/ 1 part of hardener	2 parts of paint base/ 1 part of hardener
N/A	15 (matt) 35 (semi-gloss) 95 (gloss)	20 (matt) 50 (semi-gloss) 80 (gloss)	60-70 (Silk Matt)	Standard colours: white, yellow, red, blue, green and black
Approx. 10 m ² /litre	Approx. 10 m ² /litre	Approx. 10 m ² /litre	Approx. 10 m ² /litre	Approx. 6-8 m ² /litre
Approx. 6 hours	Approx. 1.5-2 hours	Approx. 6 hours	Approx. 4 hours	Approx. 4 hours
6 hours	72 hours	120 hours	72 hours	72 hours
Min. 1 year	Approx. 24 hours at 20°C when mixed/ Min. 1 year	Min. 1 year	Approx. 4 hours at 20°C when mixed/ Min. 1 year	Approx. 2 hours at 20°C when mixed / Min. 1 year
1 coat	2-3 coats	2-3 coats	2-3 coats	1-2 coats, depending on colour
5 litres	5 + 0.2 litres	2.5 and 5 litres	5 litres + 5 litres	1 + 0.5 litre
Screen mesh prior to application  	  	 	  	 

JUNCKERS Water-Based Lacquers

Our water-based lacquers ensure that your wooden floor will meet your requirements. Our product range comprises lacquers for various purposes, from high-traffic floors in shops, offices and sports halls to low-traffic floors in private homes. Several types of finish are available (from gloss 10 to gloss 80), and they are environmentally sound and easy to work with.









Prefill













Prelak



Pro Finish

Type:	Acrylic based mastic filler.	1 component water based primer.	1 component water based co polymer pu / acrylic lacquer.
Use:	Filler to be mixed with sanding dust for filling gaps in floors.	Primer for all wooden floors to minimise side bonding. Ideal for large sports floors.	Fast drying and curing seal for residential use. Very easy to apply and UV stable.
Mixing Proportions:	N/A	N/A	N/A
Gloss:	N/A	N/A	10 (ultra matt) 20 (matt) 50 (semi-gloss) 70 (gloss)
Coverage:	Approx. 10 m ² /litre	Approx. 8 m ² /litre	Approx. 10 m ² /litre
Drying time at 20°C and 60% RH:	Approx. 1 hour	Approx. 1-2 hours	Approx. 3 hours
Maximum hardness time-Ready for use:	72 hours	72 hours	72 hours
Pot life/shelf life in unopened container:	Min. 1 year	Min. 1 year	Min. 1 year
Number of coats normally required	1 coat	1 coat	2-3 coats
Package sizes:	5 litres	5 litres	5 litres
Application:		Screen mesh prior to application  	Screen mesh prior to application   



				
Strong	HP Commercial	HP Sport	High Performance Friction+	Strong Line
1 component water based 100% polyurethane lacquer.	2 component water based 100% polyurethane lacquer.	2 component water based 100% polyurethane lacquer.	2 component water based 100% polyurethane lacquer.	1 component 100% water based polyurethane line marking paint.
For sealing wooden floors and internal woodwork. Residential and light commercial use only - not suitable for sports use.	High traffic, high durability and fastest curing seal. Non yellowing - ready for use the next day.	High traffic, high durability sports seal. Scuff resistant, fastest curing seal. Non yellowing - ready for use the next day. Conforms to DIN and EN 14904 sports standards.	High traffic finish for commercial areas. Fast curing. Ideal for use in areas where wet slip resistance is a high priority. Tested to BS7976-2 TM2002.	For line marking sports flooring.
N/A	10 parts of lacquer/ 1 part of hardener	10 parts of lacquer/ 1 part of hardener	10 parts of lacquer/ 1 part of hardener	N/A
20 (matt) 50 (semi-gloss) 80 (gloss)	10 (ultramatt) 20 (matt) 50 (semi-gloss)	50 (semi-gloss)	10 (ultramatt)	Standard colours: white, yellow, red, blue, green and black
Approx. 10 m ² /litre	Approx. 10-12 m ² /litre	Approx. 10-12 m ² /litre	Approx. 10-12 m ² /litre	Approx. 6-8 m ² /litre
Approx. 4 hours	12 hours - 95% of cure 72 hours - 100% of cure	12 hours - 95% of cure 72 hours - 100% of cure	12 hours - 95% of cure 72 hours - 100% of cure	Approx. 4 hours
72 hours	72 hours	72 hours	72 hours	72 hours
Min. 1 year	Approx. 2 hours at 20°C when mixed/ Min. 1 year	Approx. 2 hours at 20°C when mixed/ Min. 1 year	Approx. 2 hours at 20°C when mixed/ Min. 1 year	Min. 1 year
Needs separate primer on bare wood. 2-3 coats.	Needs separate primer on bare wood. 2-3 coats.	Needs separate primer on bare wood. 2-3 coats.	Needs separate primer on bare wood. 2-3 coats. Use Pro Seal primer with Ultra Matt.	1-2 coats depending on colour.
5 litres	4.5 litres + 0.45 litres	4.5 litres + 0.45 litres	4.5 litres + 0.45 litres	2.5 litres
Screen mesh prior to application 	Screen mesh prior to application 	Screen mesh prior to application 	Screen mesh prior to application 	

JUNCKERS Rustic Oils

<p>JUNCKERS Rustic Oils give the wood a rich, warm lustre and a deeper shade, while also setting off the natural grain pattern. Rustic oils are easy to work with and produce a beautiful result. Our oils make maintaining the wood easy, while also preserving the natural lustre of the wood.</p>					
	<p>Rustic Oil/ Rustic Oil White</p>	<p>Rustic Oil Colour</p>	<p>Soul+Collection Oils</p>	<p>Rustic Top Oil</p>	
<p>Type:</p>	<p>Urethane oil (VOC 2007 Conformant) Clear and white.</p>	<p>Coloured urethane oil (VOC 2007 Conformant).</p>	<p>Coloured urethane oil (VOC 2007 Conformant).</p>	<p>Water based alkyd oil.</p>	
<p>Use:</p>	<p>Penetrating urethane hardening oil for floors, worktops and internal surfaces. Not for external use.</p>	<p>Penetrating urethane hardening oil for floors, worktops and ternal surfaces. Can be overcoated with HP Lacquers. Not for external use.</p>	<p>Penetrating urethane hardening oil for Soul+Collection.</p>	<p>Very fast drying maintenance oil for surfaces treated with Rustic oils.</p>	
<p>Mixing Proportions:</p>	<p>N/A</p>	<p>N/A</p>	<p>N/A</p>	<p>N/A</p>	
<p>Gloss:</p>	<p>Deep, warm glow / white-stained</p>	<p>Nut, walnut, cherry, mahogany, grey, anthracite and black.</p>	<p>HotSalsa, TastyCherry, PureChocolate, SmoothRum, RawSugar, SpicyPepper, WildHazel, CrunchyCaramel</p>	<p>Approx. 20 (matt)</p>	
<p>Coverage:</p>	<p>Oil-treated wood: 20-50 m²/litre Untreated wood: 5-10 m²/litre</p>	<p>Oil-treated wood: 20-50 m²/litre Untreated wood: 5-10 m²/litre</p>	<p>Oil-treated wood: 20-50 m²/litre Untreated wood: 5-10 m²/litre</p>	<p>60-80 m²/litre</p>	
<p>Drying time at 20°C and 60% RH:</p>	<p>Approx. 6-8 hours</p>	<p>Approx. 6-8 hours</p>	<p>Approx. 6-8 hours</p>	<p>Approx. 30-60 min.</p>	
<p>Maximum hardness time-Ready for use:</p>	<p>72 hours</p>	<p>72 hours</p>	<p>72 hours</p>	<p>Approx. 24 hours</p>	
<p>Pot life/shelf life in unopened container:</p>	<p>Min. 1 year</p>	<p>Min. 1 year</p>	<p>Min. 1 year</p>	<p>Min. 1 year</p>	
<p>Number of coats normally required</p>	<p>3 coats</p>	<p>3 coats</p>	<p>3 coats</p>	<p>1 coat</p>	
<p>Package sizes:</p>	<p>0.75, 2.5 and 5 litres</p>	<p>0.75, 2.5 and 5 litres</p>	<p>0.75, 2.5 and 5 litres</p>	<p>0.5 and 2.5 litres</p>	
<p>Tools:</p>					

JUNCKERS Maintenance and Care Products

				
Sylva Cleaner / Sylva Sport Cleaner	Sylva Polish	Sylva Neutralizer	Sylva Wash Polish Mat	Sylva Strip
Liquid floor cleaner. pH concentrate approx. 8.5 Ph applied solution 6-8.	Maintenance polish. pH concentrate approx. 8.6 pH applied solution 8.3.	Liquid floor cleaner. pH concentrate approx. 3.2 Ph applied solution 1.8.	Liquid floor cleaner. pH concentrate approx. 10 Ph applied solution 8.4.	Polish remover.
General floor cleaner / Sports floor cleaner ideal for cleaning and degreasing sports flooring	Maintenance protector to protect the sealed surface of Silk Matt lacquered floors.	For removal of Sylva Cleaner before application of lacquer and oil.	Cleaner and maintainer for floors treated with Ultra Matt lacquer.	For removal of Sylva-Polish from floors.
0.5 - 2 ml per 10 litres.	1-2 ml per 10 litres of water	2 ml per 10 litres of water	100 ml per 10 litres of water	75 ml per 10 litres of water / 250 ml per 10 litres of water
N/A	N/A	N/A	N/A	N/A
N/A	Diluted: approx. 30-40 m ² /litre. Undiluted: approx. 80-100 m ² /litre	N/A	Approx. 80-100 m ² /litre	Approx. 80-100 m ² /litre
Approx. 5 min.	Approx. 5 min.	Approx. 5 min.	Approx. 20-30 min.	Approx. 30 min.
N/A	N/A	N/A	N/A	N/A
Min. 1 year in unopened container	Min. 1 year in unopened container	Min. 1 year in unopened container	Min. 1 year in unopened container	Min. 1 year in unopened container
1 coat	1 coat	1 coat	1 coat	1 coats
1, 2.5 and 5 litres	1 and 5 litres	1 litre	1 litre	1 litre
 	 	 	 	 