

## EXTERNAL FIRE-RATED DOOR BLANK




-  Exclusive to Moralt  
Spruce core single batten construction
-  Fire rated FD 30 / FD 60
-  Tested to BS EN ISO 140-3 –  
BB93 compliant
-  Robust 9-ply construction





LAMINESSE FireSafe

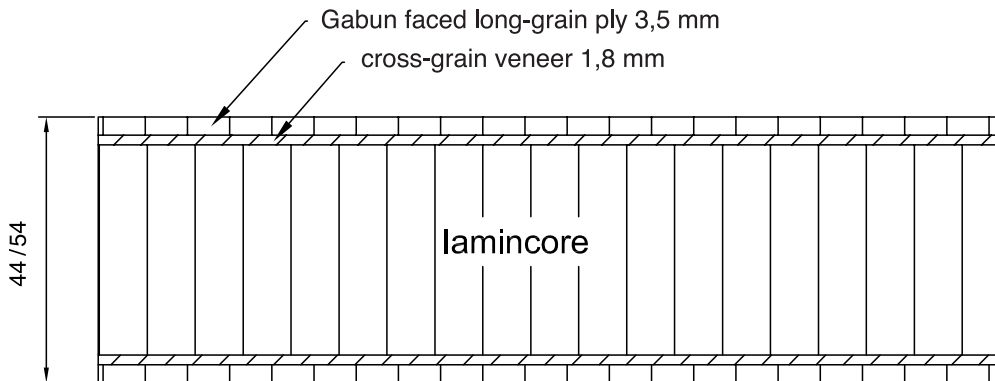

TECHNICAL DETAILS		
Thicknesses	44 mm	54 mm
Fire rating	FD30 BS 476 Pt. 22	FD60 BS 476 Pt. 22
Weight	approx. 22 kg/m <sup>2</sup>	approx. 24 kg/m <sup>2</sup>
Maximum sizes	upto 2.440 x 1.220 mm	upto 2.440 x 1.220 mm
Facings	Gabun faced long-grain ply 3,5 mm	