

omnis

Roofing & Cladding



LokFacade




LokFacade

cladding solutions

LokFacade has been designed to provide a cost-effective and aesthetically pleasing cladding solution for soffits, fascias, canopies and external walls.


Available in a standard width of 300mm, LokFacade can also be supplied in an almost limitless range of non-standard widths from 150 to 900mm and provides a cost-effective solution for both newbuild and refurbishment projects. LokFacade is available with two basic formats, designed to fit either flush or with a shadow line, which can be interchanged to create a number of aesthetically pleasing designs.

In addition to the standard profiles, LokFacade is also available with a micro-ribbed profile, which provides a very pleasing appearance as well as helping to avoid deformation of the profile when using lighter materials. Micro-ribbed is available on both flush and shadow line finish.

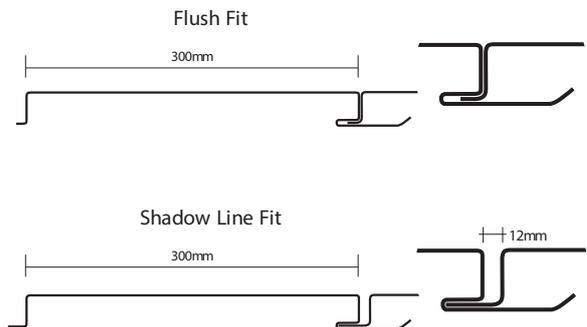



Shadow line finish

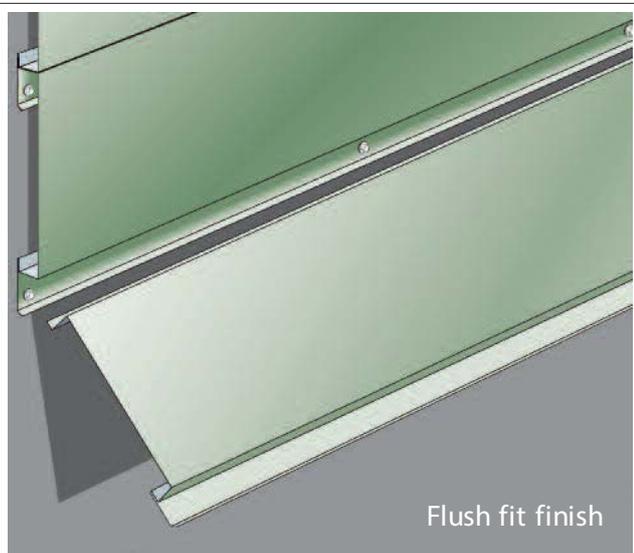

Flush fit finish



A feature of LokFacade is the very simple installation procedure, directly to the structure of the building.

The first panel is fixed in place to the substrate. Subsequent panels are then simply pushed into place together with mineral fibre insulation in the void behind the exterior facade depending on thermal requirements.

The trailing edge of the panel is then fixed in place before adding the next panel, providing a secret fixed solution which is as simple and speedy to install as it is easy on the eye. Installation is completed by a flashing which covers the remaining fixings at the extremities.

Max panel length:

Panel length on the standard 300 profile is limited only by site handling considerations - typically up to 12m - while non-standard profiles are available in lengths up to 3m.

Available surface finishes:

Steel: Plain galvanised - Plastisol - PVDF - Nova

Aluminium: Mill finish - ARS - PVDF

STEEL

	Standard	Micro-ribbed
0.7mm Plastisol	✓	✓
0.7mm PVDF	✗	✓
0.7mm Nova	✗	✓
0.9mm Galv	✓	✓
0.9mm PVDF	✓	✓

ALUMINIUM

0.9mm any finish	✗	✓
1.0mm any finish	✓	✓
1.2mm any finish	✓	✓

In addition, any of the above options can be supplied perforated.

LokFacade is also available in Zinc, Stainless Steel and Copper. For more information please contact us.

omnis

www.omnisexteriors.com
enquiries@omnisexteriors.com

Omnis reserves the right to make substitutions and modifications to the specifications of any of its products without prior notice. It is the customer's responsibility to ensure that the company's products are correctly installed and that they are suitable for the customer's particular requirements and application.

The company undertakes business only upon its standard terms and conditions.

For project specific NBS based specifications, CAD Details, samples or technical assistance please contact our technical department on enquiries@omnisexteriors.com.

All information is correct as of the date of this document, created May 2015.