




Specification Advice

For laying
SureSet flexible resin bound aggregate surfacing



Permeable Car Park (SUDS) cars and occasional light delivery vehicles

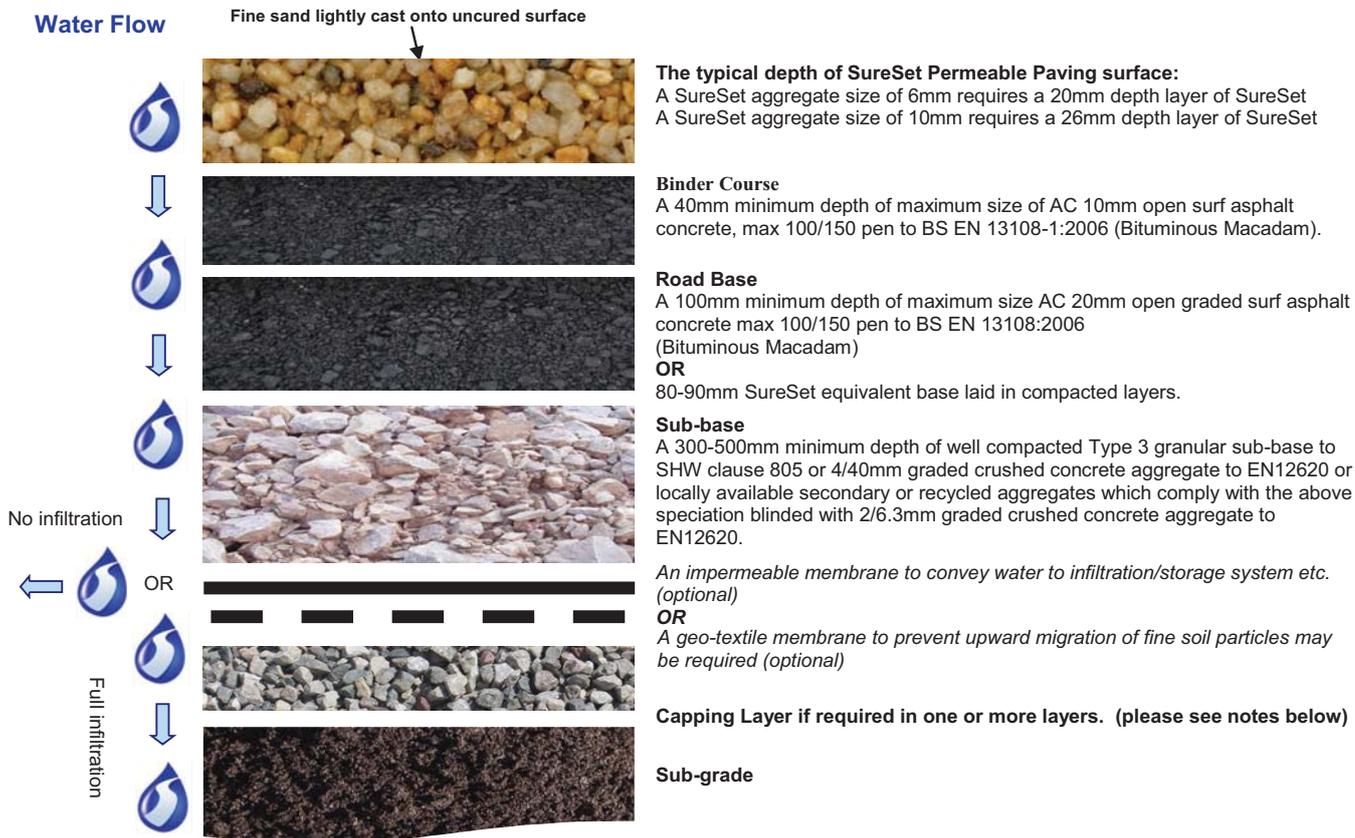

Full infiltration - water returns to ground surface

No infiltration - impermeable membrane used to carry water off to storage tank for either storage or controlled release

Purpose

To provide a seamless, flexible and hardwearing surface.

Advantages

An attractive and durable surface that is permeable to water and remains easy to clean.

Notes

If there is a danger that standing water will soften the sub-grade in an unlined system a nominal fall to an outfall should be considered.

If plastic or silty sub grade is present it may be necessary to stabilise the sub grade or partially replace it with sub-base/granular capping.

Total sub-base thickness will be dictated by expected loading/required water storage capacity/sub-grade strength.

The maximum deviation of the base should not exceed 3mm under a 1 metre straight edge.

This specification is based on normal good practice for flexible surfacing and does not absolve the specifier from designing a construction suitable for the expected traffic and ground conditions pertaining on a given site.

Specification Advice

QRSA7156
Permeable Car Park (SUDS)

SureSet
Permeable Paving

Permeable Car Park (SUDS) cars and occasional light delivery vehicles



The details in this specification are intended only as a guide in specifying SureSet products, actual designs should be developed by the project designers taking into account the specific circumstances of the intended application. SureSet assumes no responsibility for improper reliance upon or misuse of the data herein. Product design and specification are subject to change without further notice.

If you have any enquiries call our technical sales team on: +44 (0)1985 841180

SureSet UK Ltd, 32 Deverill Road Trading Estate, Sutton Veny, Warminster, Wiltshire, BA12 7BZ
+44 (0)1985 841180 mail@sureset.co.uk www.sureset.co.uk