


# AIRMAX

FOR CURTAIN WALLING & STAND ALONE WINDOW SOLUTIONS

**R**  
REYNAERS  
aluminium

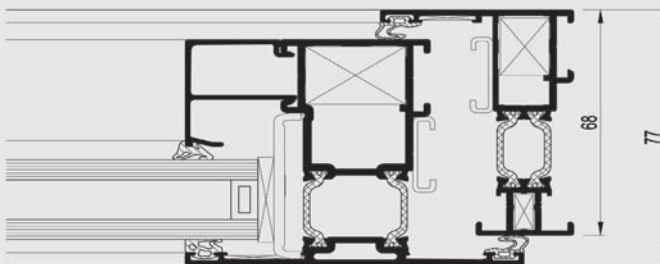

AIRMAX is Reynaers highly innovative Parallel Opening Window (POW), which is available as a traditional window as well as contained within Reynaers existing curtain wall.

The stand alone Parallel Opening Window is part of Reynaers existing CS77 system, whilst the curtain wall POW can be integrated into all of Reynaers curtain wall systems, giving greater freedom of design and functionality.

When open, AIRMAX allows air to penetrate around its entire perimeter, facilitating highly efficient ventilation and increasing air flow by almost double, in comparison to a traditional top hung window. This in turn creates less draught within the room as the open space is more evenly distributed around the frame. This process was demonstrated by Arup's recent study which looked at the benefits of using a parallel opening window system, as opposed to the traditional top hung window system (figures available on request).

# AIRMAX

## STAND ALONE WINDOW SOLUTION

Airmax benefits from optimised safety and security due to the parallel opening being restricted to 100 mm, significantly increasing the security of the building.

Furthermore, the system offers an aesthetic benefit as the angle of the glass remains the same whether the windows are open or closed. It provides maximum light entrance into the building and is available in a range of styles. Airmax also offers technical solutions for the different performance requirements of a façade such as insulation and weather performances.

### TECHNICAL CHARACTERISTICS

Style variants	CS77 POW
Min. visible width outward opening window	
Frame	13 mm
Vent	89 mm
Max. vent size	
Vent height	2000 mm (*)
Vent width	2000 mm (*)
Min. visible width T-profile	76 mm
Overall system depth window	
Frame	68 mm
Vent	77 mm
Rebate height	25 mm
Glass thickness	up to 53 mm
Glazing method	Dry glazing with EPDM or neutral silicones
Thermal insulation	Omega-ribbed and/or hollowchamber-shaped fibreglass reinforced polyamide strips

## PERFORMANCES

### ENERGY

Thermal insulation <sup>(1)</sup>  
EN 100772

Uw value can be as low as 1.2 W/m<sup>2</sup>K depending on the application <sup>(6)</sup>

### COMFORT

Acoustic performance <sup>(2)</sup>  
EN ISO 140-3; EN ISO 717-1

Rw (C; Ctr) = 36 (-1; -4) dB / 42 (-2; -4) dB, depending on glazing type

Air tightness, max. test pressure <sup>(3)</sup>  
EN 1026; EN 12207

1 (150 Pa)	2 (300 Pa)	3 (600 Pa)	4 (600 Pa)
---------------	---------------	---------------	---------------

Water tightness <sup>(4)</sup>  
EN 1027; EN 12203

1A (0 Pa)	2A (50 Pa)	3A (100 Pa)	4A (150 Pa)	5A (200 Pa)	6A (250 Pa)	7A (300 Pa)	8A (450 Pa)	E750 (750 Pa)	E (900 Pa)
--------------	---------------	----------------	----------------	----------------	----------------	----------------	----------------	------------------	---------------

Wind load resistance,  
max. test pressure <sup>(5)</sup>  
EN 12211; EN 12210

1 (400 Pa)	2 (800 Pa)	3 (1200 Pa)	4 (1600 Pa)	5 (2000 Pa)	Exxx (> 2000 Pa)
---------------	---------------	----------------	----------------	----------------	---------------------

Wind load resistance to frame deflection <sup>(5)</sup>  
EN 12211; EN 12210

A (≤1/150)	B (≤1/200)	C (≤1/300)
---------------	---------------	---------------

### SAFETY

BS 7950: 1997 (windows) has been tested to UK standards

This table shows possible classes and values of performances. The values indicated in red are the ones relevant to the CS77 POW system.

- (1) The Uw value measures the heat flow. The lower the Uw value, the better the thermal insulation.
- (2) The sound reduction index (Rw) measures the capacity of the sound reduction performance of the frame.
- (3) The air tightness test measures the volume of air that would pass through a closed window at a certain air pressure.
- (4) The water tightness testing involves applying a uniform water spray at increasing air pressure until water penetrates the window.
- (5) The wind load resistance is a measure of the profile's structural strength and is tested by applying increasing levels of air pressure to simulate the wind force. There are up to five levels of wind resistance (1 to 5) and three deflection classes (A,B,C). The higher the number, the better the performance.
- (6) Based on high specification glass and improved spacer on a vent size of 2300 mm x 3000 mm. Air and water performance subject to testing. Please refer to Reynaers Technical Department for calculation details.

# AIRMAX CURTAIN WALL SOLUTIONS

## TECHNICAL CHARACTERISTICS

Style variants	CW50 / CW60 POW BONDED VENT	CW50 / CW60 POW BEADED VENT	CW86 BONDED VENT	CW86 BEADED VENT
Min. visible width outward opening window				
Frame	Not visible	Not visible	Not visible	Not visible
Vent	Not visible	35 mm	Not visible	35 mm
Max. vent size				
Vent height	Up to 2400 mm (*)	Up to 2400 mm (*)	Up to 2400 mm (*)	Up to 2400 mm (*)
Vent width	Up to 1500 mm (*)	Up to 1500 mm (*)	Up to 1500 mm (*)	Up to 1500 mm (*)
Overall system depth window				
Frame	Varies depending on glass thickness	Dependent on overall vent size	Varies depending on glass thickness	Dependent on overall vent size
Vent				
Rebate height	Not applicable	35 mm	Not applicable	35 mm
Glass thickness	27 mm-40 mm	24 mm-30 mm	26 mm-36 mm	6 mm-38 mm
Glazing method	Dry glazing with EPDM or neutral silicones			
Thermal insulation	Glazed into thermally enhanced curtain walling			

(\*) Vents over 1200 mm wide require motorised operation. Please check with Reynaers Technical Department in Birmingham for further advice.

For more information go to [www.barbourproductsearch.info](http://www.barbourproductsearch.info)

**Head Office, Birmingham**  
**Reynaers Ltd**  
Kettles Wood Drive, Birmingham B32 3DB  
Tel: 0121 421 1999 Fax: 0121 421 9797  
[reynaersltd@reynaers.com](mailto:reynaersltd@reynaers.com)

**Reynaers Consult**  
The Arena, Stockley Park,  
Uxbridge UB11 1AA  
Tel: 0208 899 1741 Fax: 0208 899 1742



ISO 9001  
FM 72245



[www.reynaers.co.uk](http://www.reynaers.co.uk)

[www.reynaers-inspiration.co.uk](http://www.reynaers-inspiration.co.uk)

[www.recycle.co.uk](http://www.recycle.co.uk)