

TATA STEEL



Environmental Product Declaration

Trimapanel® System by Tata Steel
Colorcoat® assessed cladding system



Environmental Product Declaration

An Environmental Product Declaration (EPD) provides a summary of the environmental impacts of a product or system during each stage of its life.

The data published for each of the Colorcoat® assessed cladding systems is based on an initial Life Cycle Analysis (LCA) study that we conducted in 2002 in accordance with the international standard ISO 14040-3. We first published EPDs in 2008, and as part of the CarbonNeutral® protocol, all EPDs are subject to a 3 yearly review. The review takes into consideration any changes to the manufacturing processes and changes to the calculation standard methodology. This approach has subsequently been refined and extended to include more products and systems.

Tata Steel has an ongoing commitment to reduce CO₂ emissions associated with pre-finished steel manufacture. This is reflected in the overall reduction (10-18%) of the environmental impact reported in this EPD since our initial calculations in 2008.

Consideration Points

- The durability of a product will always affect the results of a LCA because of the environmental impact of maintenance, and the need to replace less durable products during the lifespan of the building. Nearly 50 years of development has enabled us to ensure that Colorcoat® by Tata Steel is the most advanced pre-finished steel product available with the most comprehensive and extensive guarantees for long-term durability.
- A series of sensible assumptions have been made to take into account transport of cladding materials between manufacturing locations, installation and end of life.
- End of life scenarios for pre-finished steel cladding systems are based upon current practice. For built-up systems this means the steel content is recycled, whilst insulation is sent to landfill. Factory insulated composite panels are shredded, the steel content is recycled and the insulation sent to landfill.
- There are many reasons why the Colorcoat® assessed cladding systems have slightly different environmental impacts. Although steel and insulation content predominates the analysis, Confidex Sustain® allows all of the assessed cladding systems to achieve zero carbon status by offsetting all unavoidable CO₂ emissions.
- This EPD summarises the environmental credentials of a cladding system. This information can be used in conjunction with whole life cost data, aesthetic considerations, appropriate maintenance regimes and other building specific factors such as speed of construction, to determine the optimum cladding solution for your building. We continually review and update the LCA to ensure they fully reflect the latest standards, the latest EPDs are available online at www.colorcoat-online.com/epd.

Cladding system assumptions

- This EPD covers cladding systems using Colorcoat HPS200 Ultra® or Colorcoat Prisma® external cladding used with a Colorcoat® PE 15 liner sheet.
- The functional unit is 1m² of pre-finished steel cladding in the main body of the roof or wall excluding rooflights and edge details at eaves, ridges and walls.
- Complete transport of material is included in calculation from the pre-finished steel manufacturer to the profiler; to the construction site and at end of life to a scrap recycling facility. An average road transport distance from the profiler to the construction site has been used.
- The cladding system is covered in entirety and includes fixings, insulation and the internal and external pre-finished steel cladding sheets and their associated spacers, installation and demolition.
- Sealant strips, mastics and tapes have been excluded due to their negligible impact on the whole system analysis.
- The cladding system lifetime is defined as the appropriate Confidex® Guarantee Period for the Colorcoat® pre-finished steel product specified.
- Detailing and installation are in accordance with the MCRMA, system manufacturers installation guide and Tata Steel best practice.

The latest revisions of Approved Document L of the Building Regulations, allows the building designer to choose the level of insulation in the wall and roof elements, provided that they exceed a stated minimum or "backstop" value. This EPD covers the range of U-values, which are available for each cladding system. The building designer must always consider that increasing insulation to reduce the buildings operational emissions will increase the environmental impact embodied within the building, and is not necessarily the most cost effective way to meet the building performance requirements.

For guidance upon the role of the building envelope in Part L 2010 compliance, download our Colorcoat® Technical Paper at www.colorcoat-online.com/technical.

The Colorcoat® brand

Tata Steel is one of Europe's largest steel producers. Our Shotton Works in North Wales exclusively manufactures our internationally recognised Colorcoat® brand; the mark of quality and metal envelope expertise covering a range of pre-finished steel products, specifically developed for roof and wall cladding systems for the building envelope. As the leader in metal building envelopes for nearly 50 years, we have made sustainability a key part of what we do and how we work with the market. The environmental challenges we all face are significant, we are working hard to reduce our impact and to be part of the solution. Colorcoat® products are manufactured in the UK, are certified to independently verified international management system, ISO 14001 and are truly recyclable, unlike most other construction products.

Colorcoat® BES 6001 approved

Colorcoat® products are certified to BES 6001 Responsible Sourcing standard, the first pre-finished steel envelope products in the world to achieve this.

Colorcoat HPS200 Ultra®

Designed to withstand even the most demanding and aggressive environments, Colorcoat HPS200 Ultra® provides super durability and corrosion resistance. Confidex® guaranteed for up to 40 years, combining ultimate performance with unrivalled reliability.

Colorcoat Prisma®

Colorcoat Prisma® combines a versatile palette of contemporary and traditional colours with durability and inherent flexibility. With a contemporary colour range and optically smooth finish that can deliver a modern building envelope that will look as good as the day it was installed for years to come. Confidex® guaranteed for up to 30 years, with no maintenance or inspection required to maintain its validity.

Colorcoat® assessed system

We have assessed the environmental impact of this cladding system, which has been designed to perform to the highest standards of thermal performance, air-tightness and structural performance and can be recycled at the end of its life, ensuring the most sustainable system for the building envelope.

Confidex Sustain®

Confidex Sustain® offers the first CarbonNeutral® building envelope in the world, the CO₂ emissions calculated in this EPD are used to calculate and offset the cladding systems impact from cradle to cradle i.e. from manufacture through installation and use to end of life in terms of re-use, recycling or disposal. It goes beyond considering just one element of the cladding system to assess and offset all parts including the internal and external pre-finished steel cladding sheets, fixings and insulation. For every 1kg of CO₂ measured we will offset 1kg of CO₂ in climate friendly projects overseas.

Building on the success of the Confidex® Guarantee, Confidex Sustain® is available when a Colorcoat HPS200 Ultra® or Colorcoat Prisma® pre-finished steel is used as part of a Colorcoat® assessed cladding system with a Colorcoat® PE 15 liner sheet.

How to Apply

To apply for Confidex Sustain® you will need to ensure Colorcoat HPS200 Ultra® or Colorcoat Prisma® by Tata Steel are specified for the exterior roof or walls, along with Colorcoat® PE 15 for the interior with a Colorcoat® assessed cladding system.

Anyone in the supply chain can register, but more commonly it is the system manufacturer on the client's behalf using our on-line registration service.

Following registration, the building owner will receive a Confidex Sustain® certificate with details of how much carbon has been offset and the types of project we are investing in.



Creating a sustainable system

Figure 1. Cradle to cradle analysis

The cradle to cradle analysis covers all life cycle stages.


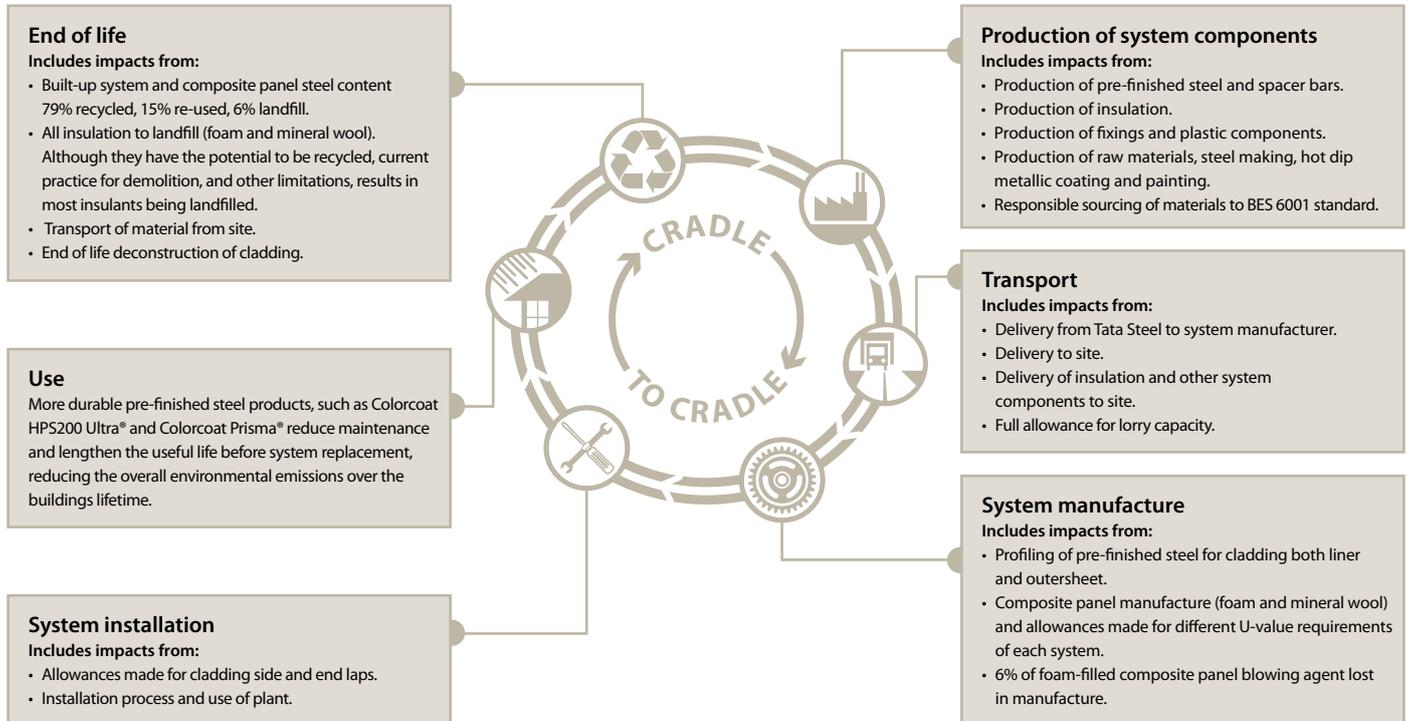


Figure 2. Effect of cladding durability on total embodied CO₂

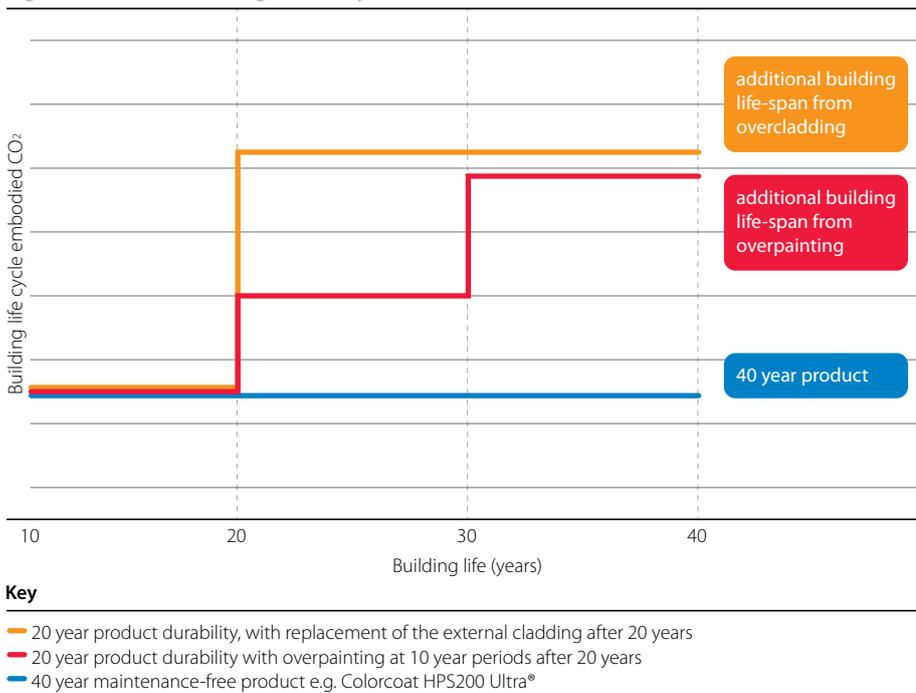

The effect of durability on total building life emissions

Durability of a material is not a factor when calculating an EPD, however it is a key consideration, when calculating the life cycle impact of the completed building.

Specifying more durable products, will reduce the requirement for in service maintenance and repair or replacement.

The graph compares the total embodied CO₂ over a 40 year building life of 2 different pre-finished steel cladding systems.

A 40 year maintenance free product will have no additional emissions during the building life.

A product with a 20 year performance will need to be maintained and either replaced or be subject to an overpainting regime, typically at 10 year intervals.

Independent verification

This EPD summarises the environmental credentials of this Colorcoat® assessed cladding system. These have been independently assessed and verified by a selection of third parties.

The Edinburgh Centre for Carbon Management

The Edinburgh Centre for Carbon Management (ECCM) is an international leader in emissions assessment, specialising in Green House Gas (GHG) emission accounting and quantification. ECCM has assessed our methodology used to develop these EPDs.

Price Waterhouse Coopers

PWC are one of the world's leading professional services firms. Operating in 150 countries, they advise some of the most successful organisations on the globe, as well as its most dynamic entrepreneurs and thriving private businesses. PWC independently verified our LCA (below) conducted in accordance with ISO 14040-3, the basis for our EPD calculations.

Third party peer review

In addition, we have had our EPD process reviewed by third party peers. This includes installation, fixing and paint manufactures, and highlights the extent to which we value the integrity of the development of our EPDs.

The life cycle assessment of potential environmental impacts has been carried out on a range of impact categories which are most applicable to pre-finished steel.

The details of each impact category are detailed below. While these are listed as discrete categories, changing product specification/manufacturing process to enhance one category, may have an adverse effect on another.

Life cycle assessment (LCA)

Embodied CO₂ (Global warming)

The rising of global temperatures due to emissions of green house gases measured in kg of CO₂. This includes the impact of high global warming potential gases such as the Hydrofluorocarbons (HFCs) used in PIR foam manufacture.

Embodied energy

The quantity of energy required to manufacture, and supply to the point of use, a product, material or service. The embodied energy of pre-finished steel is comparable to many other construction materials. However, as it can be recycled without effecting quality, the embodied energy is reduced over multiple life cycles. Therefore, the embodied energy is much less significant than the energy consumed through heating, cooling and lighting of a typical building.

Acidification

The damage caused to trees and life in lakes and rivers as a result of the decrease in pH of terrestrial watercourses due to the release of acidifying gases to atmosphere.

Confidex Sustain®

As part of the Confidex Sustain® process, the recalculated EPDs are then subject to an audit by an external assessor, the CarbonNeutral Company.

The CarbonNeutral Company

The CarbonNeutral Protocol is the market leading global standard, developed by The CarbonNeutral Company, to guarantee the integrity and credibility of clients' carbon neutral certification and enable them to be certified CarbonNeutral®.

The Protocol assures quality of offset projects, carbon footprint assessments and communication and is regularly reviewed by an Independent Advisory Group. The company's 'audit trail' includes an annual independent verification of CarbonNeutral® programmes – from contracts with carbon offset partners through to contracts with clients and everything in between.

CarbonNeutral® is the registered trademark of The CarbonNeutral Company and is a global standard to certify that businesses have measured and reduced their CO₂ emissions to net zero for their company, products, operations or services. Permission to display the CarbonNeutral® mark is only given to clients whose carbon reduction programme is implemented in accordance with The CarbonNeutral Protocol.

In this case the manufacturer should balance these to give the lowest overall effect.

We have carried out a LCA for this cladding system for all the below categories. Results for embodied energy and global warming are published in this document. For information on other results, please visit www.colorcoat-online.com/epd.

Eutrophication

A form of water pollution that can result in the loss of plants and animals in aquatic ecosystems. The release of nitrogen and phosphorus from fertilisers and detergents and organic matter from effluent can lead to an acceleration of the natural oxygen depletion in water courses.

Photochemical oxidant formation

Emissions of Volatile Organic Compounds (VOCs) and nitrogen oxides can interact in the lower atmosphere to cause smog which can be harmful to human health and the environment.

Abiotic resource depletion of fossil fuel

The depletion of fossil fuel such as oil and coal due to their extraction and consumption.

Trimapanel® Wall System by Tata Steel

The Trimapanel® System from Tata Steel is an insulated, secret-fix architectural wall cladding system comprising of a pre-finished steel liner profile, a polyisocyanurate (PIR) insulation core and a micro-rib Colorcoat® pre-finished steel external weathering profile. The polyisocyanurate (PIR) insulation core uses the latest foam technology providing enhanced environmental benefits, together with fire performance approved by LPCB.

The Trimapanel® System has a secret fix joint design, which is quick and easy to install, and is available in three cover widths, a choice of external profile and a wide variety of colours and finishes. The system also includes a wide range of flashing options, ancillaries, integrated window, and fabricated corner and curved panel options.

The system offers excellent economic and environmental performance, and comes with comprehensive certification and the Platinum® System Guarantee.



Material declaration

Table 1. Material declaration (weight and % per m²). Figures rounded to two decimal places.

	70 thickness		90 thickness	
Cladding inner and outer sheet	9.93	78.70%	9.93	74.23%
Insulation	2.66	21.08%	3.42	25.56%
Fixings	0.03	0.22%	0.03	0.21%
Total	12.62	100%	13.38	100%

Figure 3. Embodied CO₂ and energy for reducing U-values.

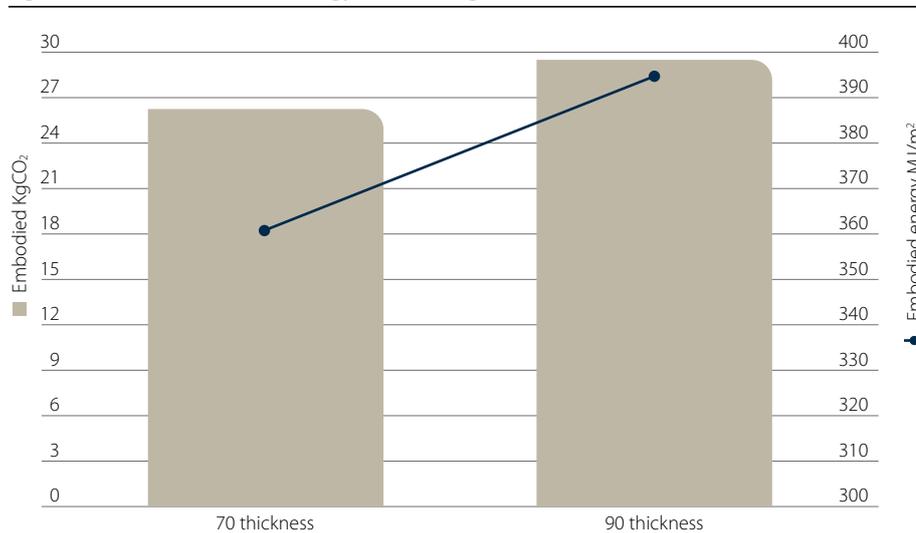




Table 2. CO₂ emissions (KgCO₂) for Trimapanel® Wall System using Colorcoat HPS200 Ultra® or Colorcoat Prisma®.

	70 thickness	90 thickness
Production and installation	41.54	44.79
End of life	-15.29	-15.27
Total	26.25	29.52

Table 3. Embodied energy (MJ/m²) for Trimapanel® Wall System using Colorcoat HPS200 Ultra® or Colorcoat Prisma®.

	70 thickness	90 thickness
Production and installation	496.77	530.67
End of life	-136.69	-136.50
Total	360.08	394.17

Full EPD results on further categories are published online and available at www.colorcoat-online/epd

www.colorcoat-online.com

Trademarks of Tata Steel UK Limited

(formerly Corus UK Limited)

Colorcoat, Colorcoat Connection, Colorcoat HPS200 Ultra, Colorcoat Prisma, Confidex, Confidex Sustain, Platinum and Trimapanel are registered trademarks of Tata Steel UK Limited.

CarbonNeutral is a registered trademark of the CarbonNeutral Company.

Care has been taken to ensure that the contents of this publication are accurate, but Tata Steel Europe Limited and its subsidiaries, (including Tata Steel UK Limited), do not accept responsibility or liability for errors or information that is found to be misleading. Suggestions for, or descriptions of, the end use or application of products or methods of working are for information only and Tata Steel Europe Limited and its subsidiaries accept no liability in respect thereof.

Before using products or services supplied or manufactured by Tata Steel Europe Limited and its subsidiaries, customers should satisfy themselves as to their suitability.

Tata Steel

Shotton Works
Deeside
Flintshire
CH5 2NH

Colorcoat Connection® helpline

T: +44 (0)1244 892434
F: +44 (0)1244 892321
www.colorcoat-online.com
E: colorcoat.connection@tatasteel.com

Trimapanel® System

T: +44 (0) 845 30 88330
F: +44 (0) 845 30 11013
www.tatasteelconstruction.com/theworks