

Caprice Baths

Bath

- ▶ Reinforced fibreglass bath and frame
- ▶ Height adjustable via 2 x 24V electric actuators
- ▶ IP67 rated lite touch control
- ▶ Integral shower system

Lifter

- ▶ Steel chassis
- ▶ Polyurethane foam seat and backrest
- ▶ Stainless steel seating system and transfer chassis
- ▶ Four pivoting brake castors Ø 125mm
- ▶ Polyurethane foam folding footrests

Versions

- ▶ RH - 7104.02 / LH - 7104.01 Caprice bath (Fixed height)
- ▶ RH - 7103.02 / LH - 7103.01 Caprice bath (Variable height)
- ▶ RH - 7101.02 / LH - 7101.01 Caprice bath (Variable height with integrated hoist and transfer system)

Mains Electrical Requirements



- ▶ Mains power: 230V-50hz-180w
- ▶ Battery backup system

Options

- ▶ HydroSpa
- ▶ ColourSpa
- ▶ AromaSpa
- ▶ AudioSpa

Conformity

- ▶ 73/23 CEE (Low voltage directive)
- ▶ 89/336/CEE (EMC directive)
- ▶ NF EN 60335-1 (Electric standard)
- ▶ NF EN 60335-2-60 (Electric standard)
- ▶ NF C 15-100 (Low voltage electric installation)
- ▶ NF EN 1717 (Anti-pollution)
- ▶ TMV3 - D08 - WRAS

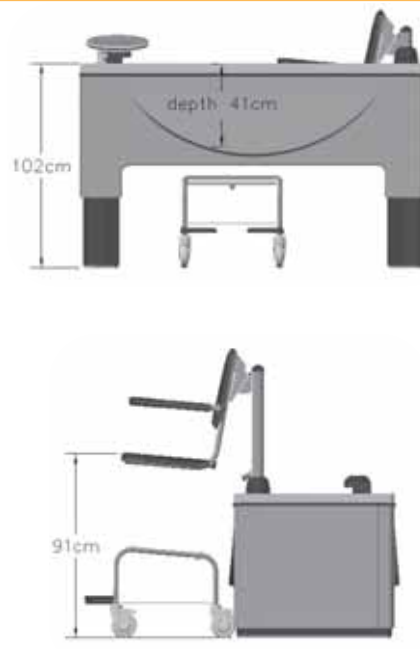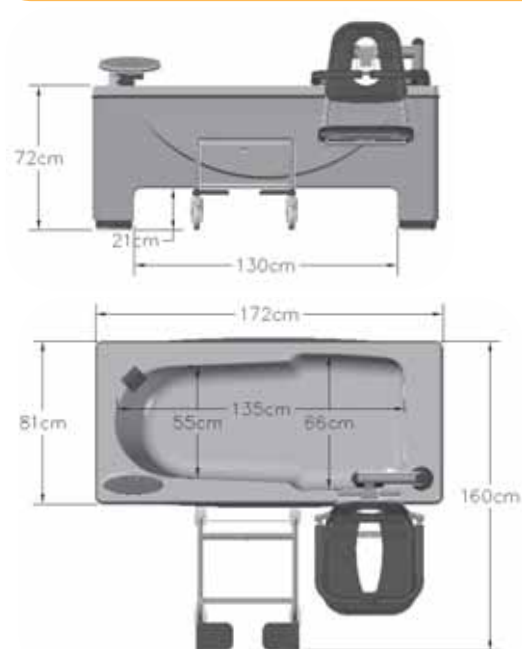

Integral hoist and seating system



Integral hoist provides effortless transfers into baths