

AQUARITHERM™

Auto w/ Remote Sensor

AT04-002

The Aquaritherm™ designed for use with healthcare environments in mind, with ergonomic easy to clean surfaces.

Sensor operated for maximum hygiene and efficiency. 7LPM intergrated flow control.

Single mixed feed connection by Copper tail (10mm). Internal TMV3.

Chromed finish.

Requires Supplied Mains Station kit to operate.



PRODUCT NUMBER

AT04-002 Auto Aquaritherm

TECHNICAL DATA


Type of tap	AquariTherm
Material	Brass
Surface finish	Chromed
Gross weight	2.95 kg
Type of operation	No Touch Sensor
Type of mounting	Wall mounted
Type of mixing	Internal TMV3
Automatic purge	Yes* -Default: OFF
Purge run time	Default OFF*
Spout projection	200mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Volume flow rate at 3 bar	7 LPM
Water connection	10mm Copper tails

Remote Tap Sensor (AC02-017)

Adjustable settings

Runtime	2, 5, 10, 15, 20 & 30 Seconds (Default 2 seconds)
Sensor range	1-10 (Default 5)
Wave-on / Wave-off operation	ON/OFF (Default OFF)
Anti Vandal time	30 secs, 1, 2, 4 & 8 mins (Default 1 Minute)
Automatic purge	ON/OFF (Default OFF)
Purge run time	30 secs, 1, 2, 4 & 8 mins (Default 1 Minute)
Lock outs	OFF, 4, 6, 8 & 10 ops (Default OFF)

Supplied with mains station kit.

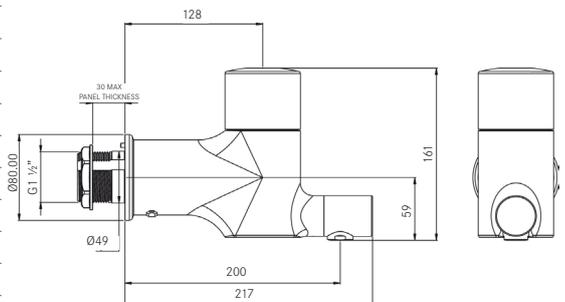

ALL DIMENSIONS IN MM

Last Updated: 2018-02-19, Dart Valley Systems



* (Set By Handheld Programmer)