



Enhanced by Nature

Highly tactile LVT flooring

Authentic Wood & Stone designs

0.7 mm wear layer

Contents

4
10
34
44
46
52
56

Enhanced by Nature

Amtico Form brings working spaces to life.

With the tactile power of natural, hand-worked materials and the unrivalled performance of premium LVT – Amtico Form's raw textures and myriad tones will transform your experience of commercial environments.

30 Woods 6 Stones 3 Textures



12YR COMMERCIAL WARRANTY The idea behind Amtico Form is simple. It looks like natural wood and stone while still performing effortlessly as LVT. It offers specifiers charm, character, and the tactile beauty of natural materials. Crafted with the hard-wearing quality and pure usability you've come to expect from our products, to elevate and enhance any environment.



Bring the outside in

Biophilic design is a guiding force for commercial spaces, with the built environment drawing us ever closer to nature. Form is created in the spirit of this movement – harnessing the interplay of colour, diffused light and deeply tactile surface textures.



Natural aesthetics

By studying the intricacies of natural wood and stone, interpreting the patterns formed by grain and weathering, our in-house designers have crafted a collection that is both natural in colour and texture.



Capture a feeling, change the mood

With Form, you can connect people to the grain of wood, the solidity of stone, the subtle shift of surface textures as light changes throughout the day – bringing the outside in and improving the wellbeing of people within the space.*

* Tsunetsugu, Y., Y. miyazaki, & H. Sato (2007). Physiological effects in Humans Induced by the visual Stimulation of Room Interiors with Different Wood Quantities. Journal of Wood Science, 53 (1), 11-16.



Certified for quality and wellbeing

With its hard-wearing 0.7 mm wear layer, this premium LVT is certified for use in education, healthcare, homes and offices – meeting VOC requirements for wellbeing and air quality across the globe.

¹ Acoustic backing available on all Form products except for Basket Weave, Barrel Oak, Pavestone and Hex designs.




12 Year Warranty

> 0.7_{mm} Premium LVT







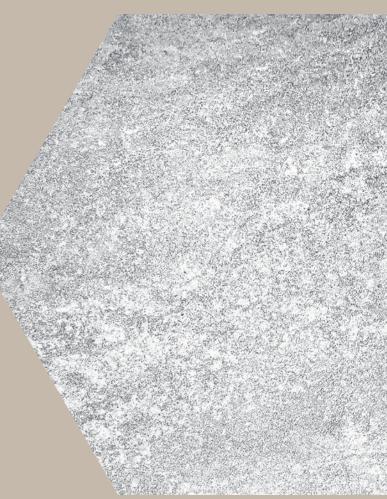



Our experience of an environment is highly influenced by the use of colours and textures within it. Through Form, we offer a practical way to harness the calming power of natural materials for hard-working commercial spaces.

Multi-functional spaces

It's the new normal for commercial spaces to serve multiple functions. As a collection, Form can adapt to suit any space - with the combination of Wood and Stone creating a natural sense of flow, of movement and distinct zones.



Gotland Oak – Stripwood & Basket Weave FP101

Creating mood



Features and focal points

Combining the elegant, handcrafted nature of Form with a modern mix of laying patterns, Form can be both a highly-functional, hard-wearing floor and the focal point of your space.



Amtico Form can contribute to the overall sensory experience of a room. As well as refined colours for visual stimulus, the subtle surface textures and the warmth of LVT underfoot also appeal strongly to the sense of touch.

Dimmet Oak – Stripwood

Dusted Oak – Stripwood & Large Parquet FP143



Get creative with our Room Visualiser

Explore patterns and colours for your next project.

amtico.com







Seaboard Oak – Herringbone Plank





Seaboard Oak FS7W8570

Seaboard Oak's dramatic elegance brings visual interest and warmth to this space without overpowering the main focus of the retail environment.

Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet

FP125



Large Parquet

FP148



Acoustic backing available on all options except for Basket Weave and Barrel Oak designs.

Cool Woods



Drift Oak

Acoustic backing available on all options except for Barrel Oak designs, 19 Acoustic backing available on an options exception 24. Basket Weave laying pattern & on orders with stripping.

Dusted Oak FS7W8520



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")



Surface Texture: Artisan Emboss

Also available in:

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") Barrel Oak Grey FK7W3300



Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")

Also available in:



Small Parquet

Large Parquet

FP120



Large Parquet



FP130





Order FREE samples.

Explore designs, hues and textures with our tactile sample swatches.

amtico.com

Valley Oak FS7W9040

Native Grey Wood FS7W9060



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Surface Texture:

Artisan Emboss

Plank Sizes:

Also available in:



Small Parquet FP131



Large Parquet

Large Parquet

FP154



Basket Weave

Small Parquet



152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") Bister Oak FS7W8490



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



FP137



FP160



Small Parquet

FP117



Large Parquet

FP140

Cool Woods

Burnished Timber FS7W9080



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:

Small Parquet



Barrel Oak Ashen

Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")

Kalmar Oak FS7W8500



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:





Large Parquet



Basket Weave

FP103



Kalmar Oak – Stripwood



FP133

Large Parquet

FP156

Get creative with our Room Visualiser

Explore patterns and colours for your next project.

amtico.com



With their authentic grain texture, fresh, contemporary colours and usable plank sizes, Form's Natural Wood Grains bring the feel, the subtlety and the impact of real timber to your interior.

Experience smooth, refined timber.

Colours







Fawn Oak FS7W8480

Fawn Oak's subtle warmth and light tones make for a bright, easy backdrop to a busy space like a bar or restaurant.

Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet

FP116



Large Parquet

FP139



Basket Weave

FP102

Neutral Woods



Shell Oak FS7W8580



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Barrel Oak Cotton

Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25") Cowrie Oak FS7W8590



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:







Basket Weave

FP104

Acoustic backing available on all options except for Barrel Oak designs, 19 Acoustic backing available on an options exception 24. Basket Weave laying pattern & on orders with stripping.

Barrel Oak Rye FK7W3303

Bergen Oak FS7W8510



Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")

Also available in:

Surface Texture:

Artisan Emboss

Plank Sizes:



Small Parquet



Large Parquet

Small Parquet



FP126



12YR COMMERCIAL WARRANTY





152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") Barrel Oak Smoke FK7W3308



Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")



FP119



Order FREE samples.

Explore designs, hues and textures with our tactile sample swatches.

amtico.com

Neutral Woods

Dimmet Oak FS7W8530



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



FP121

FP144

Small Parquet



Large Parquet

Gotland Oak FS7W8470

Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:

Small Parquet

Large Parquet

Basket Weave





Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:

FP115

FP138

FP101





FP147

Large Parquet

Strand Oak – Stripwood




With their hand-scraped surface texture design, Form's Artisan Emboss Woods give you the dense detail you'd expect to find in time-worn, deeply weathered wood.

Discover time-worn grain.

Colours

23



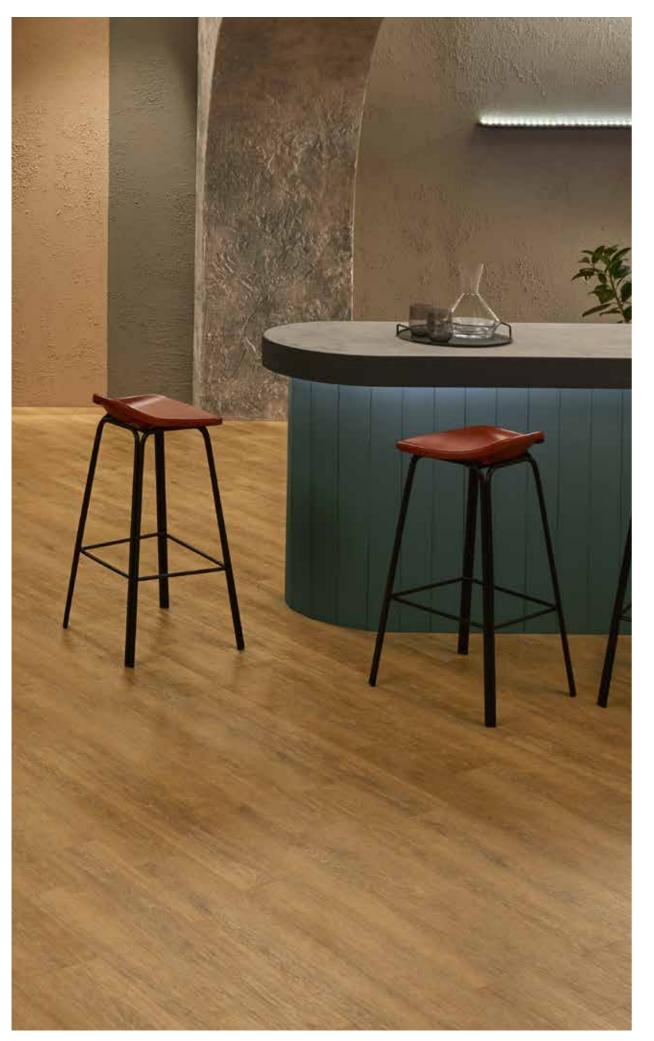

Warm Woods



Skerry Oak – Stripwood

Skerry Oak FS7W8610

This sun-kissed oak will add texture and warmth to any space, and works beautifully in combination with Hex to create zones with a contemporary feel.

Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet

FP129



Large Parquet

FP152



Acoustic backing available on all options except for Basket Weave and Barrel Oak designs.

Warm Woods



Amber Oak FS7W8550



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



Small Parquet



Large Parquet

FP146 Large Parquet

FP123



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:

Small Parquet





Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



FP128

FP151



Large Parquet

FP145

FP122



Warm Woods

Barrel Oak Dune FK7W3307



Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")



Rural Oak

Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Barrel Oak Sand FK7W3304



Surface Texture: Natural Wood Grain Emboss

Plank Sizes: 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")

Also available in:



Small Parquet



Get creative with our Room Visualiser

Explore patterns and colours for your next project.

amtico.com

FP134

FP157

FP105

Large Parquet



Basket Weave



12YR COMMERCIAL WARRANTY

YEAR

Acoustic backing available on all options except for Barrel Oak designs, 19 Acoustic backing available on an options exception 24. Basket Weave laying pattern & on orders with stripping.

Carved Oak FS7W5960

Cottage Limed Wood FS7W5940



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:

Also available in:

Surface Texture:

Artisan Emboss

Plank Sizes:



Small Parquet

Small Parquet



Large Parquet



Basket Weave

FP106

32



152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") Bureau Oak FS7W5970



Surface Texture: Artisan Emboss

Plank Sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")

Also available in:



FP132



FP155



Small Parquet

FP136



Large Parquet

FP159





Form's palette of six stones is designed to replicate the beautiful variations found in stone, with a smooth, subtle surface texture that's closer to fine ceramic, and guaranteed to make a lasting impact.

Work with cool, contemporary stone.

Colours

6



36



Stones



Opal – Hex FP112



Subtle and complex, Opal is similar to both marble and granite in appearance – bringing calm and depth to your space.

Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:



Hex



$19_{\scriptscriptstyle dB}$ $\,$ Acoustic backing available on all options except for Pavestone, Hex and orders with stripping.

Sepia FS7S4390



Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:

Mineral FS7S4350



Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:



Pavestone with Concrete Pale stripping

FP107

Pavestone with Concrete Pale stripping

FP110

Cinder FS7S4400



Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:



Pavestone with Stria Volcanic stripping

FP108





Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:



Pavestone with Stria Volcanic stripping

FP109

Stones



Crema FS7S4370

Crema's deliciously neutral tone evokes both marble and quarried stone, and works beautifully when combined with our wood palette.

Surface Texture: Ceramic Emboss

Tile Sizes: 304.8 x 609.6 mm (12 x 24")

Also available in:




Pavestone with Stria Basalt stripping

FP111





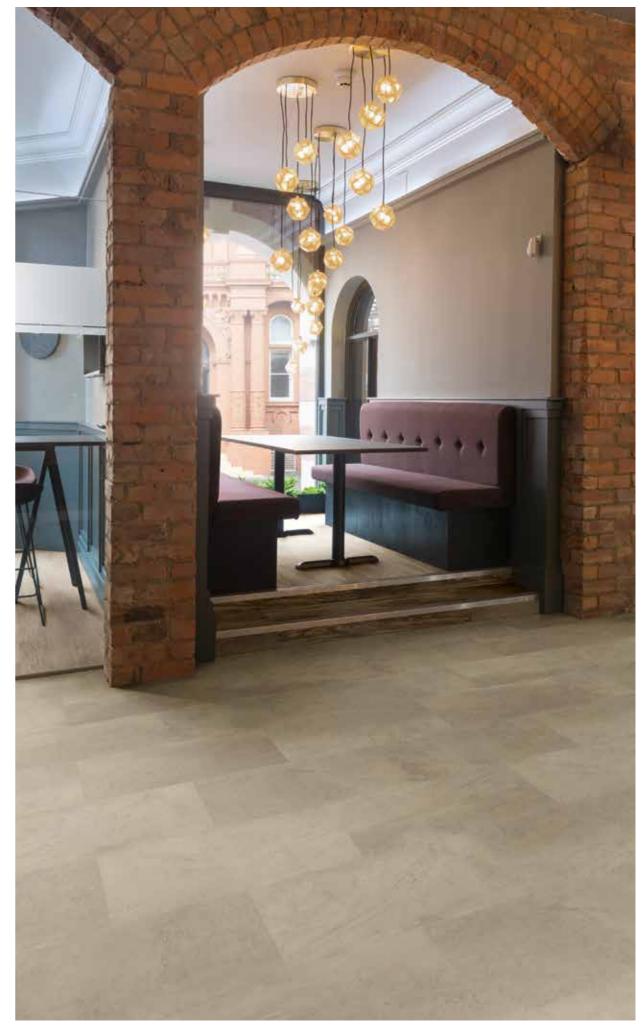

Sizes for Form

Planks & Tiles

304.8 x 609.6 mm (12 x 24") Ceramic Emboss Opal FS7S4380

152.4 x 914.4 mm (6 x 36") Artisan Emboss Wood Dusted Oak FS7W8520

184.2 x 1219.2 mm (7.25 x 48") Artisan Emboss Wood Strand Oak FS7W8620

177.8 x 1219.2 mm (7 x 48") Natural Wood Grain Emboss Barrel Oak Grey FK7W3300

235.0 x 1505.0 mm (9.25 x 59.25") Natural Wood Grain Emboss Barrel Oak Ashen FK7W3309

Enhance the flow across a space with our easy-to-use planks and tiles.




Form Laying Patterns

Quickly design and specify elegant Form floors using our pre-designed laying patterns, available alongside our single planks and tiles.


Small Parquet Available in Woods

Planks: 228.6 x 76.2 mm (3 x 9″)



Large Parquet Available in Woods


Planks: 114.3 x 457.2 mm (4.5 x 18")



Basket Weave Available in Woods

Planks: 76.2 x 304.8 mm (3" x 12")

Key: 114.3 x 114.3 mm (4.5" x 4.5")










Pavestone Available in Stones


Tiles: 152.4 x 304.8 mm (6 x 12") 304.8 x 304.8 mm (12 x 12") 304.8 x 457.2 mm (12 x 18")

Stripping Sizes: 3 x 915 mm (1/8" x 36")



Hex Available in Stones

Tiles: 152.4 x 175.9 mm (6 x 6.9")







Simple Patterns


Use Form's well-balanced size options to create impact quickly with simple, timeless pattern options.


Stripwood 177.8 x 1219.2 mm (7 x 48")

For Wood Plank sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")

Deck Block Featuring Stripping

For Wood Plank sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25")







Wicket

For Wood Plank sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48") 177.8 x 1219.2 mm (7 x 48") 235.0 x 1505.0 mm (9.25 x 59.25") Herringbone Plank


For Wood Plank sizes: 152.4 x 914.4 mm (6 x 36") 184.2 x 1219.2 mm (7.25 x 48")






Broken Bond Stripping optional


For Stone Tile sizes: 304.8 x 609.6 mm (12 x 24")




Herringbone Tile Stripping optional

For Stone Tile sizes: 304.8 x 609.6 mm (12 x 24")



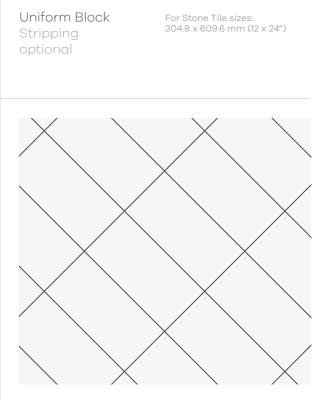



Get creative with our Room Visualiser

Explore patterns and colours for your next project.

amtico.com

Finishing touches

Amtico stripping – add contrast, definition or create a grout effect.

Feature stripping is available in the following sizes*:

3.2 mm x 914.4 mm

6.4 mm x 914.4 mm

9.5 mm x 914.4 mm

12.7 mm x 914.4 mm


19.9 mm x 914.4 mm

*Sizes shown are not actual size

American Oak	AR0W7050	Pure Plain White
Bronze	AROAMP18	Shimmer Denim
Cirrus Air	AR0W8100	Silver
and the second s	Jahren M	and the second second
Concrete Pale	AROSCN30	Stria Basalt
		Sector States
Fused Birch	AR0W7500	Stria Sediment
Gold	AR0AMP78	Stria Volcanic
alt the second second second	and all the second	and the second second
Mirabelle Crème	AROSMB14	Wenge Wood
Pure Plain Black	AR0APN22	Wild Walnut

21.00		
V7050	Pure Plain White	AR0APN11
AMP18	Shimmer Denim	AROASE39
V8100	Silver	AROAMP38
		Contraction of the second
CN30	Stria Basalt	AROSMS43
1 - Territoria	and the second second and	and an all of
V7500	Stria Sediment	AROSMS14
	化合金属 建合金 化合金化合金	
MP78	Stria Volcanic	AROSMS42
SMB14	Wenge Wood	AR0W7490
	E COMUNE COURT DE COMUNE DE LA DESERTE	C. A. Billing and
APN22	Wild Walnut	AR0W7620

Choose stripping that complements the tone and materiality of planks and tiles, then combine them together in one of our timeless patterns.





Laid in Uniform Block



Projects: Novotel – Noisy Le Grand

The lobby space of this four star Paris hotel is its beating heart – a place where guests are greeted, where friends meet, enjoy a drink, and find time to work. A place of passage, a place of exchange, with a distinct atmosphere.

Technically, a heavy traffic floor was needed, however the designer had a clear vision – aesthetically the floor had to blend into the soft pastels of the decor, supporting without intruding. Barrel Oak Rye's knot-free, gently repetitive style matched perfectly with this ambition.



Location: Paris, France Sector: Hospitality Products & Laying Patterns: Barrel Oak Rye laid in Stripwood



We are satisfied with this flooring from an aesthetic point of view, in particular the luminous tone it gives off, but also regarding its qualitative and noble appearance, its robustness and finally its ease of daily maintenance.

William Ziegler, Director of Novotel Noisy le Grand





Projects: Lerch Day Care Centre

The design of this modern, adult care space focused on creating a sense of warmth and positivity for the 20 daycare guests, residents and office staff.

Barrel Oak Dune compliments the light-filled rooms with its sun-drenched tones, echoing the natural warmth. Barrel Oak Smoke's grey and cream tones and soft flowing wood grain helped to create a softer, Nordic-inspired look communal and administrative spaces.



Location: Schwendi, Germany Sector: Care Products & Laying Patterns: Barrel Oak Smoke, Barrel Oak Dune laid in Stripwood Photography: ©Martin Duckek



The design and format selection was simply convincing and the installation went really well.

J.Ludescher Dipl.-Ing. (FH) Architect SBA Architecture and Urban Planning







Built to perform

Amtico Form's 0.7 mm wear layer makes it suitable for heavy commercial and even industrial classification environments. It offers all the charm and character of natural materials, while being much lighter to handle on site and easier to clean and maintain in high-traffic environments.

Amtico Form is made using our world-leading
Multiple Performance System - giving users
underfoot comfort, unrivalled durability and
a long lasting appearance.
Image: Comparison of the end of the


¹ Tested with E.coli and MRSA in laboratory test conditions using ISO22196 method.

Sound reduction²

 $^{\rm 2}$ Sound reduction is achieved with products that feature Acoustic Backing.

^a Form Natural Wood Grain Emboss designs (Barrel Oak) are produced with a standard urethane coating.

Multiple Performance System

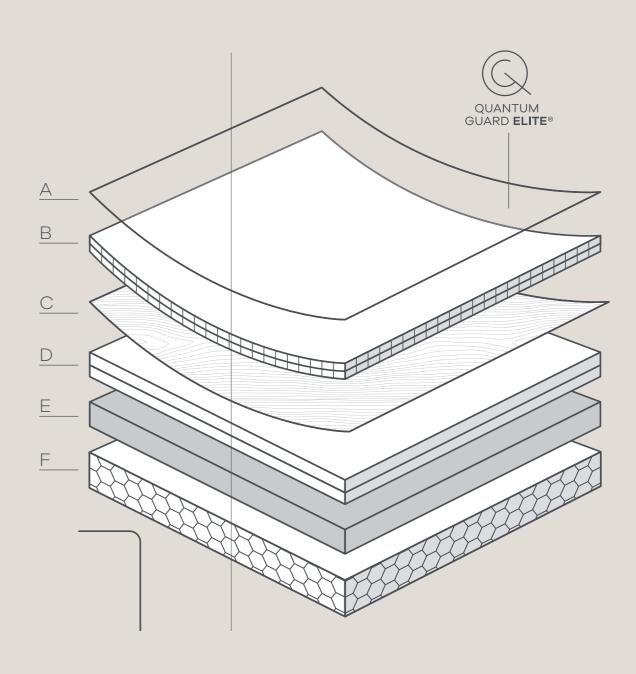

A. Quantum Guard Elite³

Amtico's patented urethane formula provides superior durability and resistance against abrasions and stains. The reinforced low gloss finish is highly realistic.

B. High density 0.7 mm wear layer

Toughened upper layer, giving excellent impact resistance and high clarity, with unique realistic embosses.

C. Design layer

Carefully crafted print films create the distinctive Amtico Wood and Stone product designs.



12YR COMMERCI WARRANTY

Through 2021 we'll be rolling out our brand new antimicrobial technology across the Form collection. This ionic silver additive has been proven to reduce bacteria' present on a floor by more than 99% over 24 hours.

D. Core layer

Contains up to 32% recycled pre-consumer content.

E. Backing layer

The foundation of the product which provides long lasting stability. Contains up to 30% recycled pre-consumer content.

F. Acoustic backing layer (optional)

Reduces the impact sound by up to 19dB and provides an extra level of comfort underfoot.

Product Availability

Packaging Information

Woods

Standard Amtico Form

Size & Specification			Straight Grain Planks			Straight Grain Tiles		
Product Name	Product Code	Surface Textures	Surface Coating	152.4 × 914.4 mm (6 × 36")	184.2 × 1219.2 mm (7.25 × 48")	177.8 x 1219.2 mm (7 x 48")	235.0 x 1505.0 mm (9.25 x 59.25")	304.8 × 609.6 mm (12 × 24")
Woods				Ū.	6	1	5	Ř
Amber Oak	FS7W8550	Artisan Emboss	Quantum Guard Elite	•	•			
Barrel Oak Ashen	FK7W3309	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Cotton	FK7W3302	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Dune	FK7W3307	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Grey	FK7W3300	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Rye	FK7W3303	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Sand	FK7W3304	Natural Wood Grain Emboss	Urethane			•	•	
Barrel Oak Smoke	FK7W3308	Natural Wood Grain Emboss	Urethane			•	•	
Bergen Oak	FS7W8510	Artisan Emboss	Quantum Guard Elite	•	•			
Bister Oak	FS7W8490	Artisan Emboss	Quantum Guard Elite	•	•			
Boardwalk Oak	FS7W8600	Artisan Emboss	Quantum Guard Elite	•	•			
Bureau Oak	FS7W5970	Artisan Emboss	Quantum Guard Elite	•	•			
Burnished Timber	FS7W9080	Artisan Emboss	Quantum Guard Elite	•	•			
Carved Oak	FS7W5960	Artisan Emboss	Quantum Guard Elite	•	•			
Cottage Limed Wood	FS7W5940	Artisan Emboss	Quantum Guard Elite	•	•			
Cowrie Oak	FS7W8590	Artisan Emboss	Quantum Guard Elite	•	•			
Dimmet Oak	FS7W8530	Artisan Emboss	Quantum Guard Elite	•	•			
Drift Oak	FS7W9020	Artisan Emboss	Quantum Guard Elite	•	•			
Dusted Oak	FS7W8520	Artisan Emboss	Quantum Guard Elite	•	•			
Eventide Oak	FS7W8540	Artisan Emboss	Quantum Guard Elite	•	•			
Fawn Oak	FS7W8480	Artisan Emboss	Quantum Guard Elite	•	•			
Gotland Oak	FS7W8470	Artisan Emboss	Quantum Guard Elite	•	•			
Kalmar Oak	FS7W8500	Artisan Emboss	Quantum Guard Elite	•	•			
Native Grey Wood	FS7W9060	Artisan Emboss	Quantum Guard Elite	•	•			
Rural Oak	FS7W5950	Artisan Emboss	Quantum Guard Elite	•	•			
Seaboard Oak	FS7W8570	Artisan Emboss	Quantum Guard Elite	•	•			
Shell Oak	FS7W8580	Artisan Emboss	Quantum Guard Elite	•	•			
Skerry Oak	FS7W8610	Artisan Emboss	Quantum Guard Elite	•	•			
Strand Oak	FS7W8620	Artisan Emboss	Quantum Guard Elite	•	•			
Valley Oak	FS7W9040	Artisan Emboss	Quantum Guard Elite	•	•			
Stones								
Cinder	FS7S4400	Ceramic Emboss	Quantum Guard Elite					•
Crema	FS7S4370	Ceramic Emboss	Quantum Guard Elite					•
Mineral	FS7S4370	Ceramic Emboss	Quantum Guard Elite					
								•
Opal	FS7S4380	Ceramic Emboss	Quantum Guard Elite					•
Sepia	FS7S4390	Ceramic Emboss Ceramic Emboss	Quantum Guard Elite Quantum Guard Elite					•

Details	152.4 x 914.4 mm (6 x 36″)
Plank/Tile per Box	18
M² per Box	2.50
Weight (kg) per Box	8.92
Boxes per Pallet	72
M² per Pallet	180.00
Weight (kg) per Pallet	642

Acoustic Amtico Form	Woods	Stones	
Details	152.4 x 914.4 mm (6 x 36")	184.2 x 1219.2 mm (7.25 x 48")	304.8 × 609.6 mm (12 × 24″)
Plank/Tile per Box	14	7	10
M² per Box	1.95	1.57	1.86
Weight (kg) per Box	7.51	6.23	7:19
Boxes per Pallet	72	90	72
M² per Pallet	140.40	141.30	133.78
Weight (kg) per Pallet	540	561	518

Products bevelled as standard. Please note all sizes and availability are correct at the time of press. Please contact your Area Sales Manager for the latest information.

			Stones
177.8 × 1219.2 mm (7 × 48")	184.2 × 1219.2 mm (7.25 × 48")	235.0 x 1505.0 mm (9.25 x 59.25")	304.8 × 609.6 mm (12 × 24″)
15	9	10	14
3.25	2.00	3.54	2.61
14.19	7.40	15.57	9.32
60	90	56	72
195.00	181.80	198.24	187.92
871	666	872	671

Technical Specification

Name	Standard	Symbol	Result Natural Wood Grain Emboss	Result Artisan Emboss Wood & Ceramic Emboss
CE/DOP	EN 14041	CE	CPR/AI/013	CPR/AI/013
Usage Classification	EN ISO 10874		23, 34, 43	23, 34, 43
Manufacturing Standard	EN ISO 10582		Pass	Pass
Total Thickness	EN ISO 24346		2.5 mm	2.5 mm
Wear Layer Thickness	EN ISO 24340		0.7 mm	0.7 mm
Weight	EN ISO 23997		3,277 g/m ²	3,450 g/m²
Abrasion Resistance	EN ISO 10582		Type 1	Type 1
Residual Indentation	EN ISO 24343-1		≤ 0.1 mm	≤ 0.1 mm
Dimensional Stability	EN ISO 23999	<u>הא</u> צא	≤ 0.25%	≤ 0.25%
Dimensional Stability / Curling	EN ISO 23999		≤ 2 mm	≤ 2 mm
Slip Resistance	DIN 51130 EN 13893	DS	R10* Class DS	R10* Class DS
Chemical Resistance	EN ISO 26987		Excellent	Excellent
Colour Fastness to Light	EN ISO 105-B02		≥ 6	≥ 6
Flammability/ Smoke Emissions	EN 13501-1	Brest	B _{ri} -s1	B _n -s1
Castor Chair Resistance (Type W)	EN ISO 4918		Pass	Pass
Impact Sound Insulation	EN ISO 717-2	e	4 dB	4 dB
Thermal Resistance	EN 12664		0,016 m²K/W (underfloor heating suitable)	0,016 m²K/W (underfloor heating suitable)
Electrostatic Resistance	EN 1815		≤2 kV	≤2 kV
Emissions	IAC Gold		Cert No. IACG-352-01-12-2020	Cert No. IACG-352-01-12-2020
Emissions	French VOC Regulation	Information sur le niveau d'émission de substances volatiles dans l'air intérieu, présentant un risque de taxicité par inhalation, sur une échelle de classe allant de At (très faibles émissions) à C (fortes émissions).	A+	A+
Emissions	M1	MI	Certified. Published on https://cer.rts.fi/en/m1	Certified. Published on https://cer.rts.fi/en/m1
UPEC	$\begin{array}{c} U_4 P_3 E_1 C_2 & \text{Bots out it based de bots} \\ U_4 P_3 E_2 C_2 & \text{Chapse climent ou batton} \end{array}$	Revêtements de sol résilients 326-0031 evaluation.cstb.fr	N/A	UPEC-Certificate 326-003.1
Environment	BRE Green Guide		Comparable to Green Guide generic elements 821570039 and 821570066 rated as A+/A.	Comparable to Green Guide generic elements 821570039 and 821570066 rated as A+/A.
Phthalate Free		Amtico Form products are manufactured using both phthalate-free and bio-based plasticisers except for recycled content.	Yes	Yes
Surface Treatment			Urethane	Quantum Guard Elite

Installation

The Form Collection has been designed for straightforward installation. To achieve the best application of Form follow these floor preparation and installation guidelines.

Intended Use

- Amtico Form products are recommended for use over properly prepared concrete, suspended wood, metal and other suitable substrates.
- Do not install Amtico Form products until the subfloor is prepared and the work of all other trades is complete.
- Amtico Form products can be used with radiant under-floor heating systems, but note that the surface temperature of the subfloor must not exceed 27°C (81°F)
- Amtico Form products are not intended for outside . use.

Material Receiving, Handling & Storage

- Ensure materials delivered are the correct style, colour, shade and quantity; check tiles for visual defects
- Report discrepancies immediately.

Jobsite Testing & Subfloor Preparation

- The building must be sealed with stable environmental conditions.
- Subfloor must be clean (free of dirt, old adhesives, paint, grease, wax or other contaminants that may stain or prevent adhesion), smooth, flat, sound, fit for purpose and free of movement and excess moisture.
- Test concrete for moisture content (country specific) or relative humidity in accordance with national regulations.
- Readings above the maximum permitted require the use of a surface damp proof membrane or adequate time for the floor to dry to an acceptable standard. Record test results and corrective action(s). Documentation is required for processing claims.
- Bring the subfloor to an acceptable condition using appropriate smoothing and levelling compounds. For wood subfloors use approved underlayment panels. Install surface preparation materials according to the manufacturers' instructions and ensure a smooth surface to prevent any irregularities or roughness from telegraphing through the new flooring.

For Form Acoustic please refer to the Form Acoustic technical specification on amtico com

* for safety flooring with long-term retention of slip resistance refer to Amtico Signature 36+ and Amtico Spacia 36+



Installation Procedures

- Inspect each tile for visual defects before installing. •
- Installation of flooring implies acceptance of .
- materials.
- . Acclimatise Amtico Form products, adhesive and subfloor to a stable condition between 18°C-27°C (64°F-81°F) for a minimum of 24 hours before, during and after installation. For best results and in particular when extreme temperature conditions exist, increase the acclimatisation to a minimum of 48 hours.
- Apply recommended Amtico adhesive according to label instructions. Adhesive selection should be appropriate to site conditions - see adhesive labels for more detailed information. Amtico will not be held responsible for any installation complaints if a nonrecommended adhesive is used.
- The floor must be rolled using a 45 kg three-section roller in both directions.
- The finished floor should be protected from point loads and heavy traffic for 24 hours after installation and should not be washed for 48 hours.

Routine Maintenance

- Daily sweep or dust mop the floor and clean up all • spills immediately.
- Perform damp mopping or machine cleaning (<450 rpm) as necessary. For routine everyday cleaning, use Amtico Maintainer or equivalent.
- When machine cleaning, use a 3M red pad or equivalent.
- Avoid cleaners that contain abrasives or solvents that may permanently damage the floor.

Periodic Maintenance

- Use stripper to remove ground in-dirt and old or • worn coats of dressing.
- Dressings can be applied if desired or as necessary. Follow the instructions for proper usage and application.


Caution

When kept clean and dry, Amtico Form products have excellent slip-resistant properties. However, in common with other smooth floor coverings, water, other liquids, grease and other contaminants on the surface of the floor can make them slippery.

For further technical information please visit amtico.com/commercial/technical

Accreditations

Our ethos is to combine creativity and innovation with the highest levels of quality – design, manufacturing, product and service.

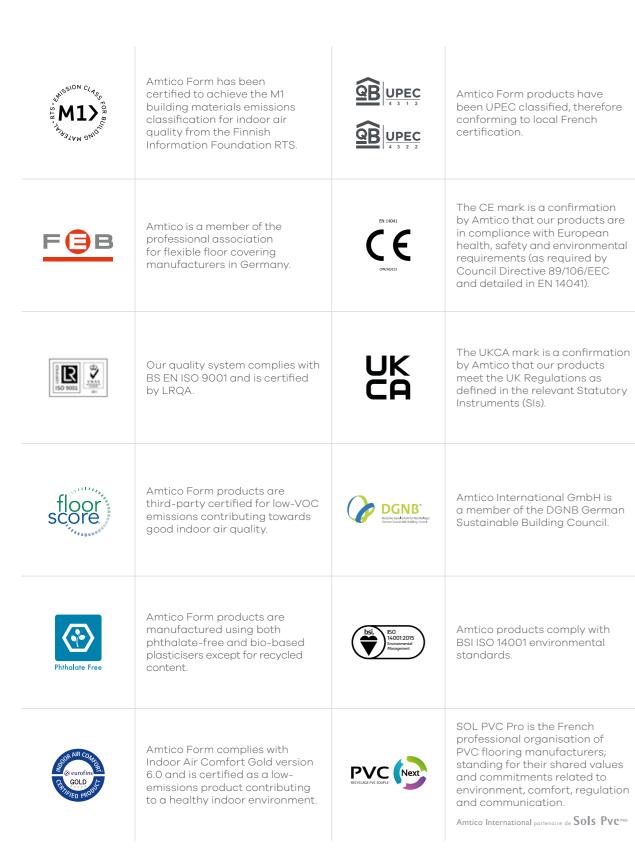



Amtico UK & European Sales

Solar Park Southside Solihull, West Midlands B90 4SH, UK +44 (0) 121745 0800 samples@amtico.com

South European Sales

Español: +34 (0) 911 14 74 42 English: +44 (0)1217450842 Sales.southeurope@amtico.com Samples: info@amtico.de

Amtico Head Office

Kingfield Road Coventry CV6 5AA, UK +44 (0) 24 7686 1400 samples@amtico.com

amtico.com

Amtico International Germany

Im Taubental 11 41468 Neuss, Germany +49 (0) 2131 359 16 0 info@amtico.de

Amtico International France

36 Avenue Hoche 75008 Paris, France +33 (0) 155 38 95 70 info@amtico.fr

Amtico International AB

S:t Olofsgatan 11A 753 21 Uppsala Sweden +46 (0) 8 584 233 24 info@amtico.se

Amtico International HK Ltd

Rm 2003 20/F OfficePlus @ Wan Chai 303 Hennessy Rd, Hong Kong +852 2327 7703 samples@amtico.com

Amtico International Middle East, Africa & India

8th Floor Building Number 2 J&G DMCC, Dubai, UAE +971 (0) 50 192 33 46 samples@amtico.com

Amtico International Australia & New Zealand

PO Box 752 Jimboomba QLD 4280, Australia +61 (0) 477708418 australia.orders@amtico.com

Visit amtico.com for more information on our product range, inspiring ideas, maintenance and installation advice. Every effort is made to achieve accurate reproduction of products in this brochure, however printing limitations can be misleading. Selection of products should be made from actual samples. Samples are small pieces cut from standard tiles. They give only a general indication of the design. Tone and shading can vary slightly from batch to batch and it is not possible to guarantee that the sample will exactly match the material supplied. The policy of the Company is one of continuous development and improvement and the right is reserved to add or delete from the range or change patterns without prior notification. All metric sizes are rounded. All products are manufactured in line with EN ISO 10582 and EN1307. Brochure correct at the time of printing.