

AQUARIUS WM STRAIGHT - No Electronics

Brushed with PEX Hose

AT07-047

The Aquarius range incorporate simple and modern design.
Seperate sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available)
Single mixed feed connection by PEX Hose. External TMV required.
Brushed finish.

Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.




PRODUCT NUMBER

AT07-047	Brushed	WM Straight tap - No electronics
----------	---------	----------------------------------

TECHNICAL DATA

Type of tap	Aquarius WM Straight
Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	1.05 kg
Type of operation	Seperate sensor required
Type of mounting	Wall mounted
Type of mixing	Additional TMV may be required
Spout projection / Total tap length	120mm / 140mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Water connection	15mm PEX hose
Volume flow rate at 3 bar	5LPM (Other flow rates available)
Working pressure	1-10 Bar (For Low / High pressure, Contact DVS.)
Max working temperature	60°C
Fixing	3/4" BSP
Fixing length	Up to 30mm with flange nut

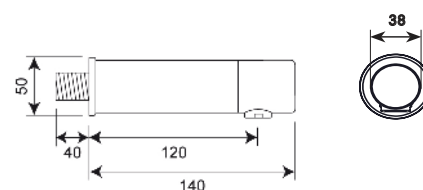

ALL DIMENSIONS IN MM

Last Updated: 2015-11-20, Dart Valley Systems

AQUARIUS WM STRAIGHT - No Electronics

Brushed with PEX Hose

AT07-048

The Aquarius range incorporate simple and modern design.
Seperate sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available)
Single mixed feed connection by PEX Hose. External TMV required.
Brushed finish.


Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.

PRODUCT NUMBER

AT07-048	Brushed	WM Straight tap - No electronics
----------	---------	----------------------------------

TECHNICAL DATA

Type of tap	Aquarius WM Straight
Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	1.15 kg
Type of operation	Seperate sensor required
Type of mounting	Wall mounted
Type of mixing	Additional TMV may be required
Spout projection / Total tap length	170mm / 190mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Water connection	15mm PEX hose
Volume flow rate at 3 bar	5LPM (Other flow rates available)
Working pressure	1-10 Bar (For Low / High pressure, Contact DVS.)
Max working temperature	60°C
Fixing	¾" BSP
Fixing length	Up to 30mm with flange nut

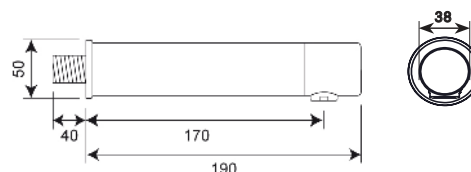

ALL DIMENSIONS IN MM

Last Updated: 2015-11-20, Dart Valley Systems

AQUARIUS WM STRAIGHT - No Electronics

Brushed with PEX Hose

AT07-049

The Aquarius range incorporate simple and modern design.
Seperate sensor operated for maximum hygiene and efficiency. 5 litres per minute integrated flow control. (Standard 5LPM, Other flow rates available)
Single mixed feed connection by PEX Hose. External TMV required.
Brushed finish.


Requires a Station kit to operate. Station kits available in Single Station Battery or Mains Single Station, 2 Station or 3 Station for multiple connections. Refer to Station kit Data sheets.

PRODUCT NUMBER

AT07-049	Brushed	WM Straight tap - No electronics
----------	---------	----------------------------------

TECHNICAL DATA

Type of tap	Aquarius WM Straight
Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	1.25 kg
Type of operation	Seperate sensor required
Type of mounting	Wall mounted
Type of mixing	Additional TMV may be required
Spout projection / Total tap length	220mm / 240mm
Minimum flow pressure	1.00 bar (Lower pressure station kits available)
Water connection	15mm PEX hose
Volume flow rate at 3 bar	5LPM (Other flow rates available)
Working pressure	1-10 Bar (For Low / High pressure, Contact DVS.)
Max working temperature	60°C
Fixing	¾" BSP
Fixing length	Up to 30mm with flange nut

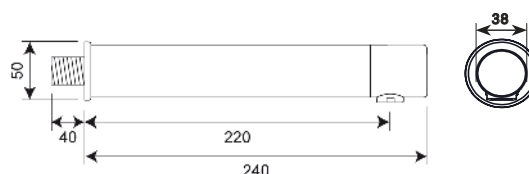

ALL DIMENSIONS IN MM

Last Updated: 2015-11-20, Dart Valley Systems