



**BOON EDAM**  
YOUR ENTRY EXPERTS.

**DATA SHEET**

**LIFELINE SPEEDLANE OPEN.**

THE **UNOBTRUSIVE** SECURITY LANE

## DIMENSIONS AND SPECIFICATIONS

| A                  | B                  | C   | D   | E                  |                       |                  |                  |
|--------------------|--------------------|---|---|--------------------|-----------------------|------------------|------------------|
| Passage Width (mm) | Capacity / Minute* | Disabled Access   | Type of Traffic   | Overall Width (mm) | Door Wing Height (mm) | Unit Height (mm) | Unit Length (mm) |
| 510                | 25-30              |  |  | 1134               | 980                   | 1035             | 1440             |

Turnstiles outside these dimensions are available on request. Please consult your Boon Edam representative  
 \* Depending on access control system, in one direction

### LIFELINE SPEEDLANE OPEN

The Lifeline Speedlane Open has been designed to the highest standards, ahead of industry trends:

- Using unique sensors which detect visitors approaching
- Sleep function to save energy
- Pulsing light strips to guide the user
- Intuitive and proven symbols to make it user friendly
- Ergonomic design for customer comfort
- Customisation possibilities in fitting with interior design
- Premium quality materials

### LEVEL UP OPTIONS



- Single lane or multiple lane set-up
- External control panel

### FINE-TUNE YOUR ENTRANCE

Whether you are making a statement, aligning with corporate branding, or creating a harmonious interior design, the Lifeline Speedlane Open makes a statement. Choose from different sizes, materials and finishes, and glass to deliver high-end, high-tech, blend-in or stand-out entrances, fit for function and purpose.

### BOONTOUCH

The BoonTouch is a universal control panel that can be used to operate the Lifeline Speedlane Open remotely, from a reception area or security desk. It is able to operate any combination of up to six security access solutions. With a user-friendly interface, the BoonTouch allows for the control of individual lanes, multiple lanes and to control an alarm situation.

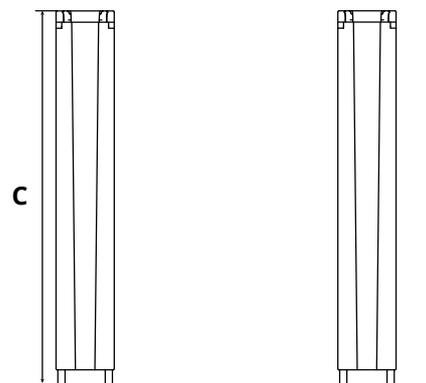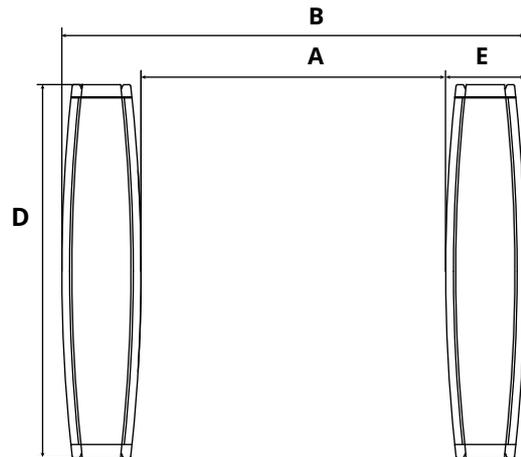

## TECHNICAL SPECIFICATIONS

**Power Supply:** 110-240 VAC, 50/60 Hz

### Power Consumption

**Operating:** 50W

**Stationary:** 45W

**Sleep Mode:** 40W

**Ambient Temperature:** -15°C to +50°C

**Weight:** 100 kg

# OUR REACH IS GLOBAL.

---

We have been in business for 150 years, manufacturing premium aesthetic and security entrance solutions in The Netherlands, the United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint and a personal grasp of local markets and their unique entry requirements.

To find your closest Boon Edam expert, please go to:  
[www.boonedam.co.uk/contact](http://www.boonedam.co.uk/contact)



**Boon Edam Limited**  
T 01233 505 900  
E [uk.contact@boonedam.com](mailto:uk.contact@boonedam.com)  
I [www.boonedam.co.uk](http://www.boonedam.co.uk)

V1-2212

  
**BOON EDAM**  
YOUR ENTRY EXPERTS.