

## LIFELINE SPEEDLANE SWING.

THE **NARROW** SECURITY LANE

### DIMENSIONS AND SPECIFICATIONS

	Α					В	с	D	E
Туре	Passage Width (mm)	Capacity / Minute*	# of Door Wings	Disabled Access	Type of Traffic	Overall Width (mm)	Door Wing Height (mm)	Unit Height (mm)	Unit Length (mm)
Standard	500	25-30	1	X	ń.	712	940	1035	1776
High	500	25-30	1	X	ń.	786	1200-1800	1035	1776
Standard 2-Wing	615	25-30	2	X	ń.	827	940	1035	1776
High 2-Wing	615	25-30	2	X	ή.	975	1200-1800	1035	1776
Wide	915	25-30	2	بل	<b>ŕ</b> ⊾	1127	940	1035	1776
High & Wide	915	25-30	2	بل	<b>∱</b> ≂	1275	1200-1800	1035	1776

*Turnstiles outside these dimensions are available on request. Please consult your Boon Edam representative* \* *Depending on access control system, in one direction.* 

#### LIFELINE SPEEDLANE SWING

The Lifeline Speedlane Swing has been designed to the highest standards, ahead of industry trends:

- Using unique sensors which detect visitors approaching
- Jump over detection sensors
- Sleep functions to save energy
- Pulsing light strips to guide the user
- Intuitive and proven symbols to make it user friendly
- Ergonomic design for customer comfort
- Customisation possibilities in fitting with interior design
- Premium quality materials

#### LEVEL UP OPTIONS


- Single lane or multi-lane set-up
- External control panel
- Safety+ Package

#### FINE-TUNE YOUR ENTRANCE

The Lifeline Speedlane Swing is available with the widest selection of dimensional and glass choices. Whether it's for a higher security level or disabled access, every combination is possible. Due to its slim form, an almost invisible gateway is created, instantly giving an air of sleek design. Whether making a statement, fitting with corporate identity colours or creating a harmonious interior design, the Lifeline Speedlane Swing can be customised to the latest design trends, offering the opportunity to blend in or stand out from its surroundings.

#### BOONTOUCH

The BoonTouch Remote Control Panel simplifies visitor management. Ideal for receptionists and security guards, it offers quick, easy, and secure visitor authorisation. Its userfriendly touchscreen enables authorised personnel to manage single or multiple security turnstiles with just a simple touch.

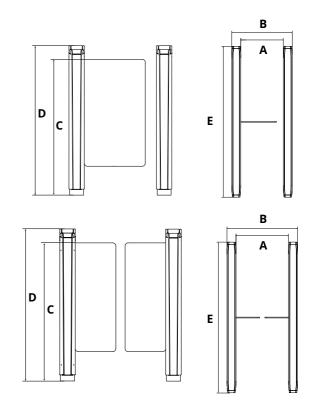

#### **EMERGENCY EGRESS**

The Lifeline Speedlane Swing is equipped with an internal battery backup; in case of an emergency, the door wings will drive open position to create a free passage way.

#### TECHNICAL SPECIFICATIONS

Power Supply: 110-240 VAC, 50/60 Hz

Power Consumption Operating: 80W Stationary: 60W Sleep Mode: 40W

Ambient Temperature: -15°C to +50°C Weight: 200 kg

# OUR REACH IS GLOBAL.

We have been in business for 150 years, manufacturing premium aesthetic and security entrance solutions in The Netherlands, the United States of America and China. We can confidently say that we cover every corner of the globe with subsidiary companies in major cities across the globe. Furthermore our global export division not only partner with our distributors, but also offer direct sales and service to every territory. This wide net allows us to have a strong global footprint and a personal grasp of local markets and their unique entry requirements.

To find your closest Boon Edam expert, please go to: www.boonedam.co.uk/contact



Boon Edam Limited T 01233 505 900 E uk.contact@boonedam.com

