

BETEC® Plug

Quick setting, cementitious, waterproof plugging compound for stopping flowing/seeping water entry into sub-structures.

Description

BETEC® Plug is a single-component quick-setting, waterproofing plugging compound supplied in 5 kg plastic buckets. When mixed with water, a plastic, highly workable mortar is formed which can be applied by hand to plug leaks in concrete and masonry structures.

System Components

- BETEC® Plug - quick setting cementitious waterproofing plugging compound.
- BETEC® Flex - flexible cementitious waterproofing slurry.
- BETEC® Seal - cementitious waterproofing slurry.
- BETEC® NSM Mortars - cementitious mortars for repair/levelling of substrates prior to the application of BETEC Flex/Seal.

Advantages

- Can be applied directly to wet surfaces.
- Strong bond - will not be washed away under active water pressure.
- No efflorescence.
- No steel corrosion.

Applications

- Sealing leaking cracks/joints in concrete surfaces.
- Plugging water leaks in masonry structures.
- Sealing leaks in horizontal/vertical joints.
- Bonding steel fixings/brackets to concrete.

Application

Storage:


Store in a cool dry place, in original packaging and use within 12 months. Protect against damage by frost if stored at low temperatures.

Substrate Preparation:

Remove all shutter release agents, bitumen, oil, grease, dirt, loose and degraded material, chase out all honeycombed/damaged concrete to a minimum depth of 30 mm. Rake out all leaking cracks and joints to form a minimum 30 mm x 30 mm chase.

All substrates should be pre-wetted with clean water to saturate the surface.

Minimum average tensile strength of prepared substrate = 1.5 N/mm².

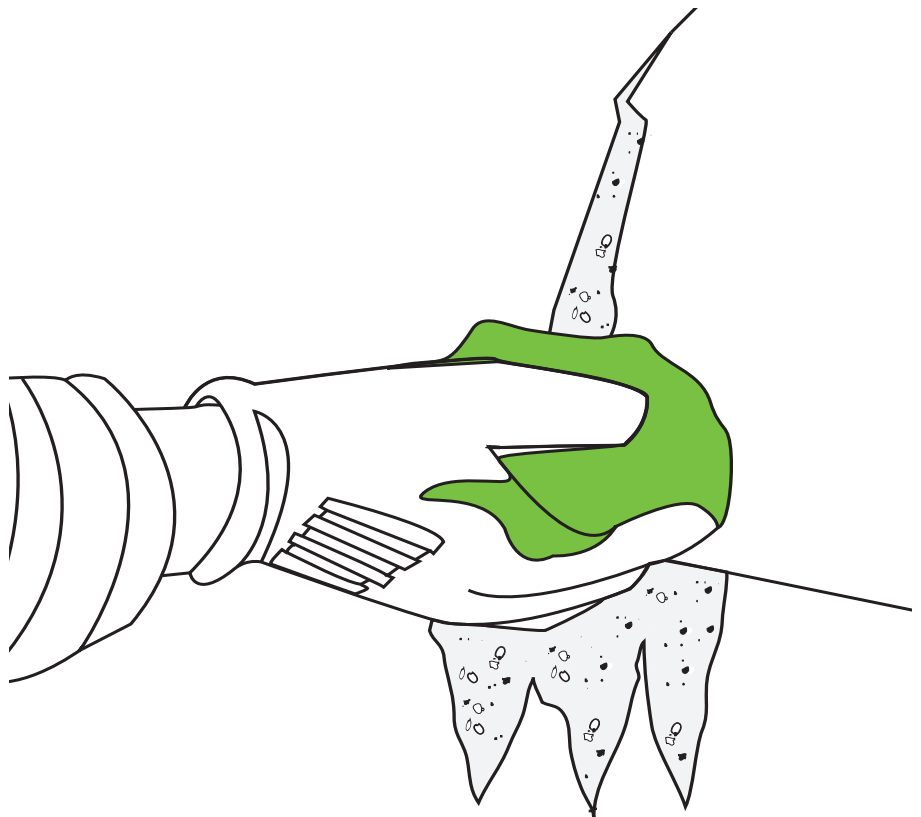

Physical Properties

BETEC® PLUG	
Pack Size	5 kg
Mineral particle size	≤ 0.15 mm
Mixed mortar density	2.2 kg/dm ³
Workability at +20°C	about 1 min.
Temperature of application	≥ 5 °C
Required water	0.16 litres per kg
Consistency	Plastic
Resistance after 1 hour	8.0 N/mm ² DIN EN 196 T
Resistance after 1 day	12.5 N/mm ² DIN EN 196 T
Resistance after 28 days	30.0 N/mm ² DIN EN 196 T
A 5 kg pack of BETEC Plug with water addition of 0.16 litres/kg will yield	total volume of 2.6 litres (0.0026 m ³) and/or 2.9 m length of 30 mm x 30 mm chase

Mixing:

BETEC Plug has a workability time of less than 1 minute at 20°C, so do not mix until you are ready to use the product. Suggested maximum quantity for mixing is 0.5 kg. Water addition is 0.16 litres per kg of BETEC Plug. Use part mixes to avoid wastage. Add the powder to the water and mix by hand for approx 15 seconds.

Use lukewarm water in cold weather and cold water in warm weather.

Application:

Apply immediately by hand (only when wearing protective rubber gloves) or by trowel. Work the material quickly into the area to be plugged and hold firmly in place until the mortar sets. Do not move the mortar during the setting phase.

At horizontal/vertical joints form a 45° fillet.

When using BETEC Plug for steel fixings, drill a hole at least 20 mm diameter bigger than diameter of the fixing and of sufficient depth to support the fixing. Fill the hole fully with BETEC Plug and push the fixing into place centrally.

Temporarily support the fixings until the mortar has fully set.

Health And Safety

Read the product label and Material Safety Data Sheet (MSDS) before use. Users must comply with all risk and safety phrases. MSDS's can be obtained from Grace Construction Products or from our web site at www.graceconstruction.com.

 Visit our web site at www.graceconstruction.com

Grace Construction Products Ltd, Ajax Avenue, Slough, Berkshire SL1 4BH United Kingdom Tel +44 (0)1753 692929 Fax +44 (0)1753 691623

Adcor, Aerofil, BETEC, Bituthene, Hydproduct, Insupak, Korkpak, Paraflex, Paraseal, Preprufe, Procor, Servicised, Servidek, Servigard, Servijoint, Servimastic, Servipak, Servirufe, Serviseal, Servistrip, Servitite, Vertigard and Vertiseal are registered trademarks of W R Grace & Co.-Conn. Adprufe, Armourtape, Bitushield, Bitustik, Bitutape, Hydropaste, Pak Adhesive, PVC Edgetie, Serviband, Serviflex, Servitape, Slipstrip, and Solarshield are trademarks of W R Grace & Co.-Conn.

The information given is based on data and knowledge considered to be true and accurate and is offered for the user's consideration, investigation and verification. Since the conditions of use are beyond our control we do not warrant the results to be obtained. Please read all statements, recommendations or suggestions in conjunction with our conditions of sale including those limiting warranties and remedies which apply to all goods supplied by us. No statement, recommendation or suggestion is intended for any use which would violate or infringe statutory obligations or any rights belonging to a third party.

Copyright 2006. Grace Construction Products Limited.

Printed in England - 05.06- Ref. BT002

GRACE
Construction Products