



# Durham Gutter Range

DATA SHEET

## Description

The Durham gutter is cast in aluminium to a traditional Ogee pattern which was extensively used in Victorian times in cast iron. This product can be used in refurbishment projects to match original specifications, or on new buildings where a very traditional style gutter is required.

The Durham gutter, replicates the cast iron pattern including the spigot and socket joint detail. The gutter is supplied as standard with a long life polyester powder coating available in over 200 standard colours. It is installed by direct fixing through prepunched holes in the back of the gutter, or in fascia or rafter brackets.

## Specifying Information

<b>Gutter type:</b>	Bailey Durham cast aluminium Ogee gutter.
<b>Size:</b>	Select from tables overleaf.
<b>Gauge:</b>	Select from tables overleaf.
<b>Jointing:</b>	Socket and spigot type. Joints to be bedded on silicone sealant and bolted with stainless steel bolts with coloured heads.
<b>Fixing:</b>	Brackets to be screwed to fascia board/rafters/at goomm centres/or direct fixed through prepunched holes in the back of the gutter/using stainless steel screws supplied by the manufacturer.
<b>Accessories:</b>	90° / 135° Internal / External / Corners. Running Outlets to suit downpipe size ..... (see separate datasheet). Stopends.
<b>Finish:</b>	Outside faces to be polyester powder coated to colour and gloss level selected from the Bailey range. (Consult Technical Department) Coating to be applied at manufacturer's in-house plant with 30 year guarantee available, subject to location.


## Fixing Instructions

To be installed strictly in accordance with the manufacturer's instruction sheet available on request and sent out with each consignment.


# General specifications

## Gutter

GUTTER			OUTLET	90° Corner Int/Ext			
SIZE	A	B	C ø	D	E	F	G
100	108	54	63/76	178	127	70	25
113	121	60	63/76	185	136	55	15
125	133	68	63/76	210	155	73	20

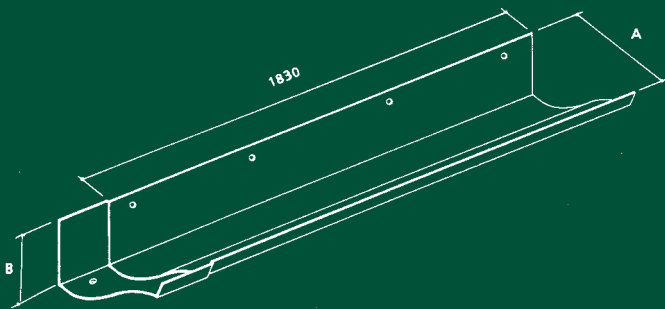


## Outlet

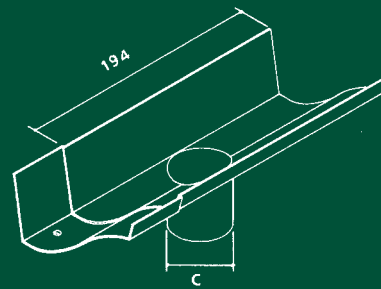


## 90° External Corner

Specify external or internal.  
(external shown).




## 90° Internal Corner

Specify external or internal.  
(Internal shown).




## Stop end



## Fascia bracket



## Internal joint sleeve



## Rafter bracket

Rafter brackets are available - please state side or top fix and angle of roof when ordering.

## Internal/External

# Flow rate chart

GUTTER SIZE	OUTLET SIZE	Capacity with central outlet	
		Litres/sec.	Roof area
100	63	0.92	44
113	63	1.2	58
125	63	1.5	72
125	76	1.6	76



**Bailey Eaves Systems**  
Blatchford Close,  
Horsham,  
West Sussex,  
RH13 5RF

Tel: **+44(0)1403 261844**

Fax: +44(0)1403 264823

Email: [sales@baileyeaves.com](mailto:sales@baileyeaves.com)