# Bohle



EKU-Banio light
Sliding Door Technology for
All-Glass Showers

# EKU-Banio light - Design and Technology for All-Glass Showers

Modern bathrooms are nothing less than an oasis of well-being and a place for relaxing and resting. The use of colours and high-quality materials are exceptionally important when it comes to meeting the requirements of functionality and design. EKU-BANIO fully lives up to this trend. The innovative sliding door technology leaves plenty of space for creativity and the clean aluminium lines emphasize the timeless elegance of the shower cubicle. EKU-BANIO is the sliding solution for high-quality all-glass shower cubicles. EKU-BANIO, with its invisible guide system, is suitable for glass sliding doors of up to 40 kg. All models are equipped with high-quality aluminium profiles and precision running tracks which ensure a smooth sliding action and a long lifespan. The all-glass doors open and close effortlessly. Integrated into the running track, the damping mechanism guarantees convenient operation.

# Concealed Sliding Technology

EKU-Banio light with concealed sliding technology is designed for glass doors of up to 40 kg. All versions are equipped with high quality aluminium profiles and precision wheel units which enable a smooth run and a long service life. The all-glass doors can be opened and closed effortlessly.

# Take advantage of the numerous benefits

### Design and Transparency

Concealed technology, slender profiles and the emphasis on horizontal lines enable transparency and elegance in the bathroom. Flush sealing profiles are available as an additional option.

### Customised Profile Lengths and Simple Mounting

All profiles can be trimmed with straight cuts – no glass processing required

### Slender Product Range

A hardware system for recess and corner application all-glass showers. Available individually or as a complete set.

### Easy Cleaning and Maintenance

Swivelling the doors to the outside does not require tools. Flush profiles, splash-proof.

### Versatile Application Possibilities

This timeless sliding door application is suitable for recess or corner mounting and can be combined with a shower tray or a barrier-free access.









### EKU-BANIO light 40 GF Recess application







Recess application for clearance mounting with fixed sidelight · EKU-BANIO light (for barrier-free shower applications without floor profile) · Profile and glass calculator: http://www.eku.ch/en/Calculator.aspx  $\cdot$  Gaskets and floor thresholds can be ordered optionally.  $\cdot$  Recess application with one-sided/double sided glass wall and fixed sidelight possible. You will find supplementary articles, accessories and drawings in our Online Shop at www.bohle-group.com.


1 Door weight max.40 kg · Running Track 1500 mm · Material Aluminium · Glass thickness tempered glass 8 mm · Door width max. 800 mm · Door height max. 2200 mm

1 Türe Door Porte BO	5215042 / 43	
S C 2x	2 x	1 x 54 x 41 mm
2x 1x	2 x 1 x 1 x	2x 11x52 mm
1x	12 x	3x

Art. No.	Finish		
BO 5215042	anodised		
B0 5215043	chrome-plated		



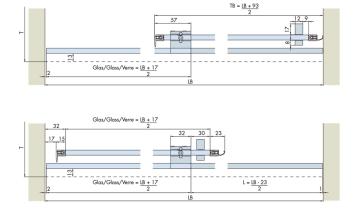



### EKU-BANIO light 40 GFE Corner application







Corner application with fixed sidelights, for 2 glass doors · EKU-BANIO light (for barrier-free shower applications without floor profile) · Profile and glass calculator: http://www.eku.ch/en/CalculatorComplex.aspx · Gaskets and floor thresholds can be ordered optionally.


1 Door weight max.40 kg · Running Track 1200 mm · Material Aluminium  $\cdot$  Glass thickness tempered glass 8 mm  $\cdot$  Door width max. 800 mm  $\cdot$  Door height max. 2200 mm


2 Türen Doors Portes	во:	5215040	/ 41			
	60 4x	4×	5500	2 x		54 x 41 mm
4×	2×	1 x	2 ×	4×		11×52 mm
1x	1x	6x		1 x	(9)	Ø 22 ×600 mm
1x						

Art. No.	Finish
BO 5215040	anodised
BO 5215041	chrome-plated











### Threshold





**1** For BO 5215040 - BO 5215043 · Length 1500 mm

Art. No.	Material · Finish
BO 5215044	Aluminium · anodised
BO 5215045	Aluminium · chrome-plated

8 x 15 mm



### Corner Connector for Threshold







Art. No.	Material · Finish
B0 5215046	Plastic · anodised
B0 5215047	Plastic · chrome-plated

### Set for Glass/Wall Mounting



Please order inner clip-on blind separately





**1** For BO 5215042, BO 5215043

Art. No.	Finish
B0 5215048	anodised
B0 5215049	chrome-plated

### Inner clip-on blind for Glass/Wall Mounting





**1** For BO 5215048, BO 5215049

Art. No.	Material - Finish
BO 5215050	Plastic - anodised
BO 5215051	Plastic · chrome-plated



### Sealing Set EKU-BANIO 40 GF

For use as seal between sliding doors, wall and fixed sidelight · for bonding · includes primer · For BO 5215042,






● Mounting flush · Finish anodised · Length 2200 mm · Material Aluminium

Art. No.		
BO 5214910		

### Sealing Set EKU-BANIO 40 GFE

For use as seal between fixed sidelights and doors; and as magnetic seal for doors · for bonding · includes primer · For BO 5215040, 5215041



Mounting flush · Finish anodised · Length 2200 mm · Material Aluminium

Art. No.			
B0 5214911			



### ► EKU Damping Set





Simple damping for two doors or double damping for one door

1 Door width one sided damping mechanism min. 260 mm · Door width double sided damping mechanism min. 480 mm

Art. No.	Damping force
BO 5219444	< 26 kg
BO 5219443	< 15 kg
B0 5215052	< 40 kg

Note: Please be aware of the door width!





	*	1 Tür,	Garnituren/Sets/Garnitures 1 Tür/Door/Porte 2 Türen/Doors/Portes 3 Türen/Doors/Portes								
		5219443	5219444 5219444	\$ 5215052 \$ ₽ \$ ₽		5219444 58 PJ	% 5215052 & ► & ►	5219443 57 52	5219444 55719444	± 5215052 ≤ ►	
Dämpfen in Schliessrichtung/Soft closing function in closing direction/ Amortissement dans le sens de fermeture	min. 260 mm				1x	1x	1x	2x	2x	2x	X x bestellen order X x commander X x
Dämpfen in Schliess- und Öffnungsrich- tung/Soft closing function in opening and closing direction/Amortissement dans le sens de fermeture et d'ouverture	min. 480 mm	1x	1x	1x	2x	2x	2x	2x	2x	2x	X x bestellen order X x commander X x

### Magnetic Seals 90° EKU-BANIO

X1

X2

For BO 5215040, 5215041 · spare seal for BO 5214911



1 Colour grey · Length 2200 mm · Material Silicone

Art. No.		
BO 5214912		

### Gasket Wall Connector EKU-BANIO

For BO 5215042, 5215043 · spare seal for BO 5214910



1 Colour grey · Length 2200 mm · Material Silicone

Art. No.		
BO 5214913		

### Gasket Fixed Sidelight - Sliding Door EKU-BANIO

For BO 5215040 - BO 5215043 · Spare seal for BO 5214910/11




1 Colour grey · Length 2200 mm · Material Silicone

Art. No.			
BO 5214914			



### ► Handle Set



For 1 door  $\cdot$  For BO 5215040 - BO 5215043  $\cdot$  for bonding  $\cdot$  includes primer

10 Length 150 mm · Width 12 mm · Height outside 17 mm · Height inside 8 mm · Finish anodised · Material Aluminium


Art. No.	
BO 5214915	



### Handle



① Version self-adhesive · Glass processing none · Material stainless steel



公

Art. No.	Length · Width · Height · Finish
B0 5113720	150 mm ⋅ 12 mm ⋅ 17 mm ⋅ matt
BO 5113721	150 mm · 12 mm · 17 mm · mirror polished
BO 5113722	150 mm ⋅ 12 mm ⋅ 8 mm ⋅ matt
B0 5113723	150 mm · 12 mm · 8 mm · mirror polished

### United Kingdom and Ireland

Bohle Ltd. Fifth Avenue, Tameside Park Dukinfield Cheshire · SK16 4PP

T +44 161 3421100 F +44 161 3440111

info@bohle.ltd.uk www.bohle-group.com