

# **Industrial Lighting Made Simple**

Light up large areas of open space with COLUMBUS.

The COLUMBUS light fitting offers exceptional efficiency at 154 l.lm/c.W, delivering up to 9,566 lumens with a robust and practical design. Its sleek, durable construction makes it an ideal choice for illuminating large indoor spaces and outdoor under-canopy areas.

#### **Ideal for:**





# **COLUMBUS**

#### **BESA fixing points**

Pre-moulded drill points at 600mm centres for speed of installation & accuracy.

#### Multi-wattage

The multi-wattage option allows you to change the lumen output on-site or switch between projects, providing complete flexibility in a reduced SKU count.

#### Quality and reassurance

Built to last with stainless steel fixings, IP65 and IK10 droptested durability, and an ENEC approved flicker-free driver. Backed by a 5-year warranty install and forget.

### **Emergency conversion pack**

Optional "Plug & play" emergency pack with lithium batteries, available in manual test or self-test.

#### Microwave sensor

Enhance efficiency and lower energy costs with a microwave sensor, activating lighting only when needed.

# Extended surface mount bracket rail


A spacious 180mm mounting area provides greater flexibility for easier retrofitting and installation.


#### Tool-free terminal block

Tool-free push fit terminals for easy and hassle free installation. Mounted on base for easy routing of mains power supply cables.

#### Product codes

ORDER CODE	DIMEN LENGTH FT	NSIONS WIDTH MM	POWER (W)	LUMENS (lm)	EFFICACY (l.lm/c.W)	CRI	<b>сст</b> (К)
NCB/4/15-26/840	4'	89	15 / 19 / 22 / 26	2090 / 2545 / 2946 / 3567	139 / 136 / 132 / 135	>80	4000
NCB/4/22-40/840	4'	89	22 / 28 / 34 / 40	3429 / 4204 / 4885 / 5557	154 / 147 / 145 / 141	>80	4000
NCB/5/20-36/840	5'	89	20 / 25 / 30 / 36	2739 / 3329 / 3859 / 4027	139 / 133 / 128 / 123	>80	4000
NCB/5/30-52/840	5'	89	30 / 38 / 45 / 52	4397 / 5260 / 6198 / 6936	143 / 140 / 137 / 133	>80	4000
NCB/6/27-47/840	6'	89	27 / 33 / 40 / 47	3695 / 4398 / 5154 / 5748	137 / 133 / 129 / 124	>80	4000
NCB/6/25-71/840	6'	89	25/31/38/44/51/57/64/71	3806 / 4705 / 5679 / 6502 / 7394 / 8070 / 8844 / 9566	153 / 153 / 151 / 148 / 145 / 142 / 138 / 135	>80	4000

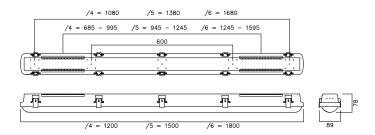



### Optional - Emergency conversion pack

ORDER CODE		DESCRIPTION	MOUNTING	POWER	EMERGENCY
N/LINEAR/M3L/CONV-PACK		LiFe Linear M3L Emergency Conversion Pack	INTERNAL	2	M3L
N/LINEAR/STM3	L/CONV-PACK	LiFe Linear STM3L Emergency Conversion Pack	INTERNAL	2	STM3L



















## NVC LIGHTING LTD NVC Park 201, Hollymoor Way, Rubery, Birmingham, B31 5HE UK

+44 (0)121 457 6340 | sales@nvcuk.com | www.nvcuk.com

















