




CAVIUS RF SMOKE & HEAT ALARM FAMILY



CV2208 CAVIUS SMOKE ALARM

- Mains-powered RF smoke alarm
- Wireless Interconnection with up to 32 devices
- Dust compensation and dual mesh
- Small, discreet design
- EN 14604:2005 + AC:2008
- 10-year warranty

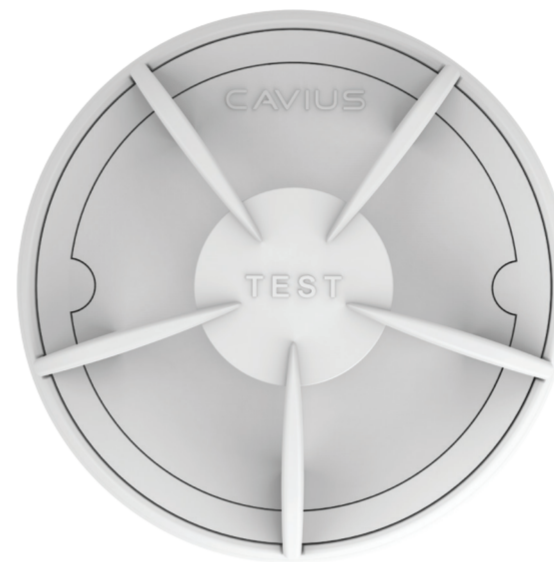

CV3202 CAVIUS HEAT ALARM

- Mains-powered RF heat alarm
- Wireless Interconnection with up to 32 devices
- Small, discreet design
- BS 5446-2:2003
- 10-year warranty



CV9004 CAVIUS RELAY

Connects external devices in a property such as telecare / warden control call systems, sprinkler systems, fire panels, strobes, and external sounders, etc.

When a fire event is detected in a property, the relay interface unit allows connected external devices to be activated.



STROBE

An example of an external *output device* that can be triggered by the CV9004 relay to provide notification of the danger of smoke and heat.



CV9101 FIRE ALARM CONTROLLER

Allows remote testing and silencing of Cavius wireless alarms.



MANUAL CALL POINT

An example of an external *input device* that can trigger the CV9004 relay and cause the smoke and heat alarms to sound.

For more information, please scan the QR code.
Contact Kidde at admin.kiddesafety@carrier.com
☎ 03337 722 227

