





1. Rinne / Channel:



fixe BH 55, beids. perf. / fix height 55, bothside perf. / V-E





fixe BH 90, beids. perf. / fix height 90, bothside perf. / V-E

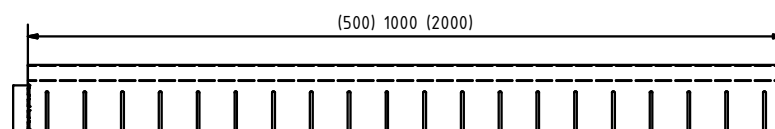



variable BH 55-90, beids. perf. / variable height 55-90, bothside perf. / V-E





fixe BH 55, geschl. / fix height 55, closed / V-E





fixe BH 90, geschl. / fix height 90, closed / V-E



fixe BH 45/55, untersch. Schenkelhöhe, beids. perf. / fix height 45/55, different side height, bothside perf. / V-E










fixe BH 45/55, untersch. Schenkelhöhe, beids. perf. / fix height 45/55, different side height, bothside perf. / V-E



Rinne / channel - Maße / dimensions				
Typ	Höhe height	Länge length	BG code V	BG code E
BG-FA RB250 perforiert/perforated	55	500	39430	39530
BG-FA RB250 perforiert/perforated	55	1000	39431	39531
BG-FA RB250 perforiert/perforated	55	2000	39432	39532
BG-FA RB250 perforiert/perforated	90	500	39450	39550
BG-FA RB250 perforiert/perforated	90	1000	39451	39551
BG-FA RB250 perforiert/perforated	90	2000	39452	39552
BG-FA RB250 perforiert/perforated	55-90	500	39460	39560
BG-FA RB250 perforiert/perforated	55-90	1000	39461	39561
BG-FA RB250 perforiert/perforated	55-90	2000	39462	39562
BG-FA RB250 geschlossen/closed	55	500	39433	39533
BG-FA RB250 geschlossen/closed	55	1000	39434	39534
BG-FA RB250 geschlossen/closed	55	2000	39435	39535
BG-FA RB250 geschlossen/closed	90	500	39453	39553
BG-FA RB250 geschlossen/closed	90	1000	39454	39554
BG-FA RB250 geschlossen/closed	90	2000	39455	39555
BG-FA RB250 perforiert/perforated	45/55	1000	39476	39576
BG-FA RB250 perforiert/perforated	90/100	1000	39471	39571


Legende / explanation:	
V:	verzinkter Stahl / galvanized steel
E:	Edelstahl / stainless steel

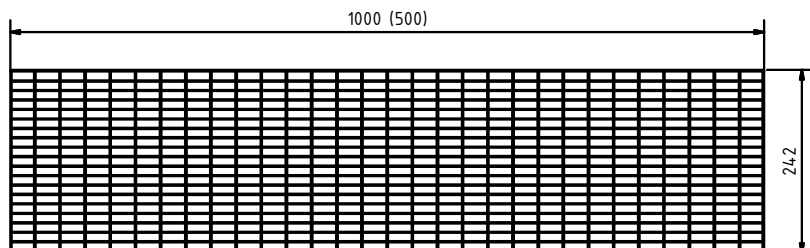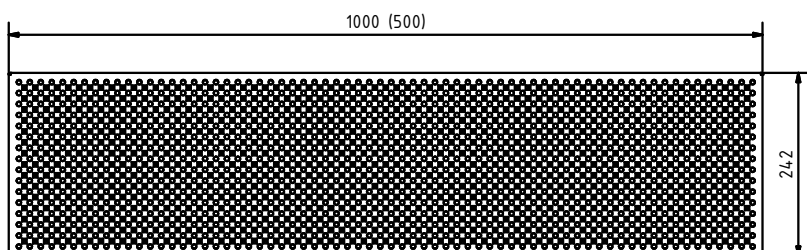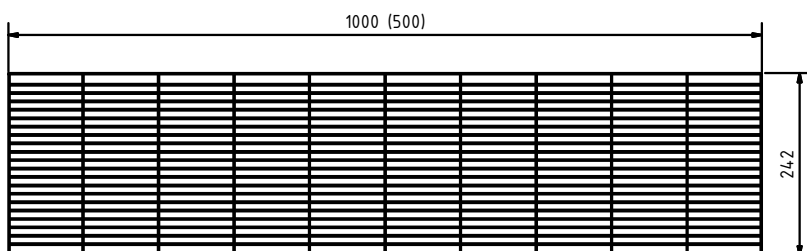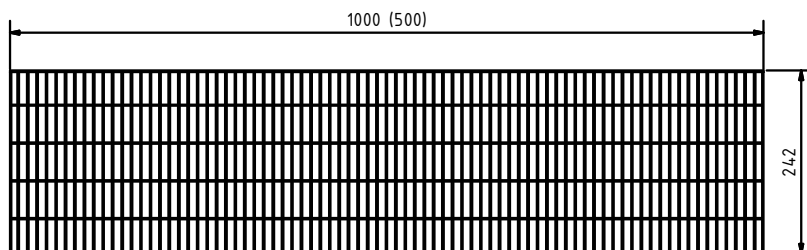2. Abdeckungen / Gratings:Gitterrost / Mesh grating:MW30/10: V 39600 (39601), E 39630 (39631)Lochrost, Ø 6mm / Perforated grating, Ø 6mm:V 39606 (39607), E 39636 (39637)Längsstabrost / Longitudinal-bar grating:V 39602 (39603), E 39632 (39633)Querstabrost / Cross-bar grating:V 39604 (39605), E 39634 (39635)




3. Ablaufteile / Outlet unit:


Ablaufteil, DN 100, fixe BH 55, geschl. / outlet unit, DN 100, fix height 55, closed / V-E

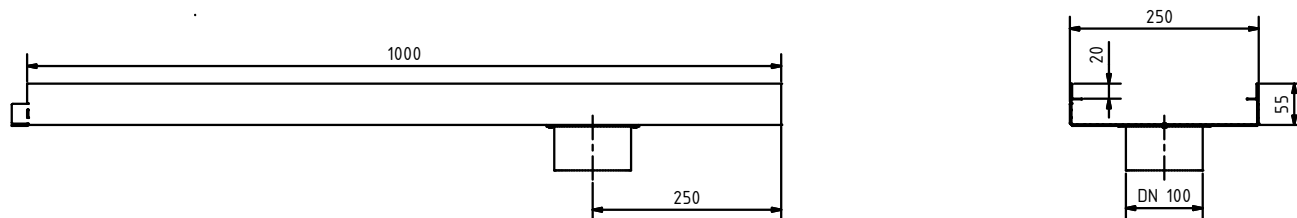






Ablaufteil, DN 100, fixe BH 90, geschl. / outlet unit, DN 100, fix height 90, closed / V-E

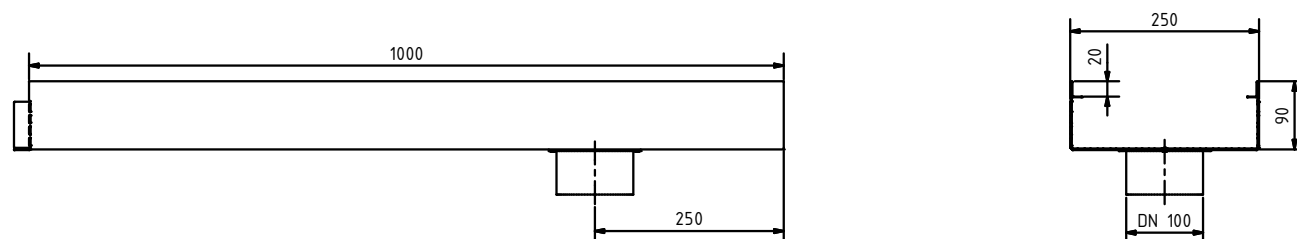

Ablaufteil, DN 100, variable BH 55-90, beids. perf. / outlet unit, DN 100, variable height 55-90, bothside perf. / V-E

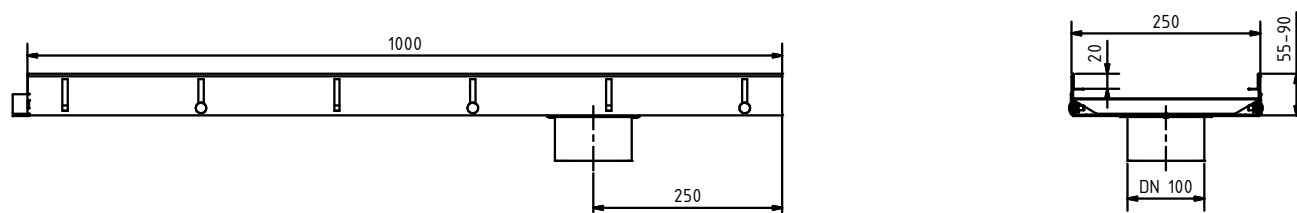


Ablaufteile / drain parts - Maße / dimensions				
Typ	Höhe height	Länge length	BG code V	BG code E
BG-FA RB250 geschlossen/closed	55	1000	39711	39716
BG-FA RB250 geschlossen/closed	90	1000	39713	39718
BG-FA RB250 perforiert/perforated	55-90	1000	39714	39719

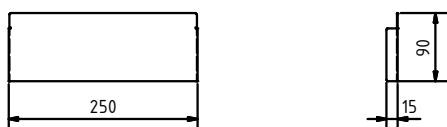4. Stirnplatte / Front cap:Stirnplatte, fixe BH 55 / front cap, fix height 55V 39670, E 39680Stirnplatte, var. BH 55-90 / front cap, var. height 55-90V 39672, E 39682Stirnplatte, fixe BH 75 / front cap, fix height 90V 39671, E 396816. Geruchverschluss / Drain trap:Geruchsverschluss für Bodenablauf, DN 100 / Drain trap for bottom outlet, DN 100PVC 300197. Verschraubungsmaterial / Bolting material:Verschraubungsmaterial (Bedarf je m 2 Stk.) / locking device kit (required per m 2 pieces) / V2AE 39696

5. Verbindungselemente / Connection pieces:


Kreuzelement, 90°, variable BH 55-90 / cross piece, 90°, variable height 55-90

V 39753, E 39763

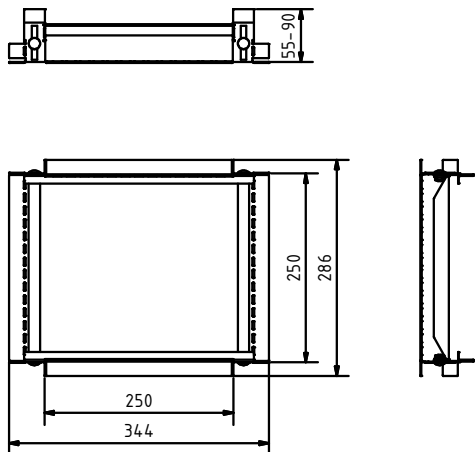


Eckelement, 90°, variable Bauhöhe 55-90 / corner piece, 90°, variable height 55-90

V 39751, E 39761

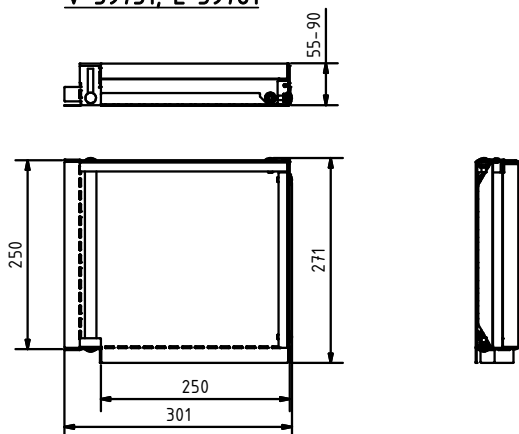

T-Element, 90°, variable Bauhöhe 55-90 / T-piece, 90°, variable height 55-90

V 39752, E 39762

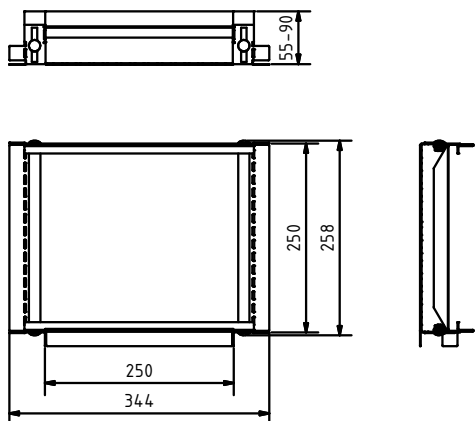


8. Aufsatzelemente / Top sections:

Aufsatzelement 230/230 / top section 230/230



variable BH 55-90 / variable height 55-90

V 37801, E 37821



variable BH 90-150 / variable height 90-150



V 37804, E 37824



Aufsatzelement 400/400 / top section 400/400




variable BH 55-90 / variable height 55-90

V 37802, E 37822

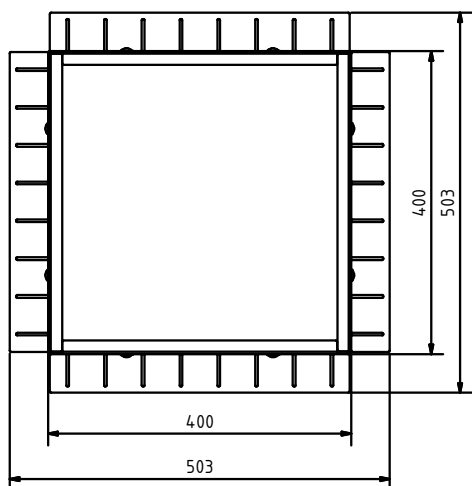

variable BH 90-150 / variable height 90-150


V 37805, E 37825

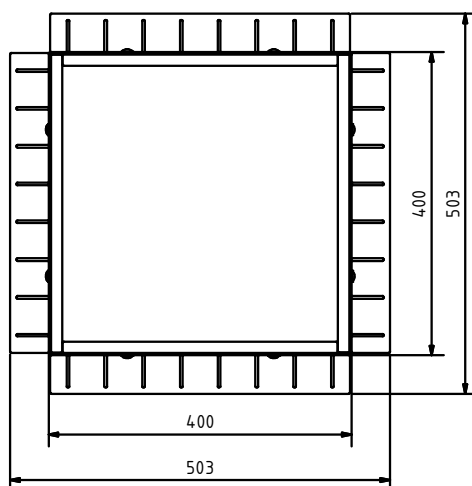


9. Abdeckungen für Aufsatzelemente / Gratings for top section:

Gitterrost, MW30/10 / Mesh grating, MW30/10

V 37830, E 37831

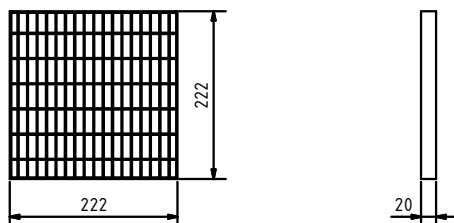


V 37834, E 37835

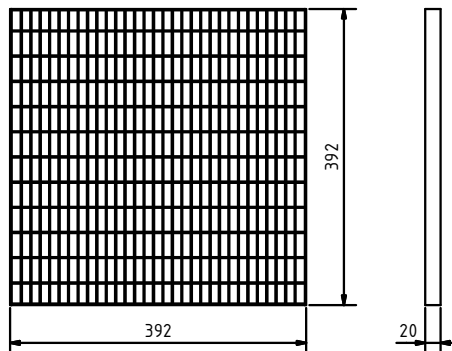


Lochrost, Ø 6mm / Perforated grating, Ø 6mm

V 37832, E 37833

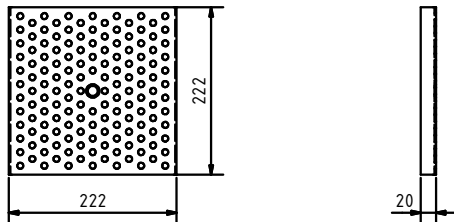

V 37836, E 37837

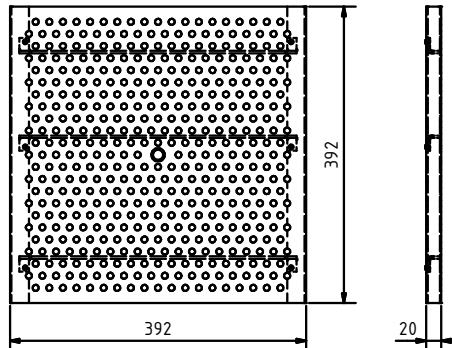

10. Stichkanäle / branch canals:

V 37851 (37852), E 37861 (37862)

