

D-AHU Modular L

Air Handling Units



Premium Efficiency Heat Recovery Unit

AHUs

CHILLERS

PROJECTS

SERVICE

Daikin Applied UK

Our promise is to ensure that customers can depend on Daikin Applied UK for the ultimate in comfort. We promise to dedicate ourselves to technological excellence, a design focus and the highest quality standards so that our customers can trust and rely on the comfort we deliver.



The compactness, air flow range coverage through 6 sizes and the achieved filtration efficiency make the Modular Light a precious ally for your ventilation system. The components used and the structure of the unit meet the ever more stringent requirements concerning energy efficiency, fire regulation and hygiene.

The future of ventilation

The new Modular Light represents one of the best solutions in terms of decentralised ventilation with unique selling features such as unit height, air flow range, number of sizes and Indoor Air Quality (IAQ) achievement.

IAQ matters

According to recent studies, people usually spend 90% of their time indoors and the amount of the air breathed each day is approximately 11000 litres. Hence, providing comfortable environments is our main goal. High IAQ evidently increases productivity levels, physical and psychological well-being and reduces health problems. Furthermore investing in a good indoor climate is an investment in your future and ultimately pays off.

Construction

- › External Pre – painted metal sheet
- › Internal Aluzinc
- › 50 mm double skin panel
- › Mineral wool insulation
- › Hinged and/or removable doors allowing full maintenance access from bottom side
- › All the units feature rectangular duct collars (optional accessory for rectangular - circular transition available)

Highlights

- › New decentralised solution for fresh air treatment
- › Fully featured unit with "Plug and Play" concept
- › Wide airflow coverage
- › Best choice when compactness is needed (only 280 mm height for up to 0.08 m³/s of air flow)
- › Optimised SFP (Specific Fan Power) for an efficient unit operation
- › IE4 motor efficiency with EC centrifugal plug fan
- › High thermal heat recovery efficiency (up to 93%)
- › Excellent indoor air quality (IAQ). Up to F9 filtration level with possibility to have a pre-filter up to F7 for the best IAQ
- › Easy and quick installation and commissioning
- › Compliant with Hygiene Directive VDI 6022
- › Overcoming the ERP 2018 European Regulations
- › Eurovent certified


Modular Light Versions

- › Modular Light without internal heating coil
- › Modular Light with internal heating coil (water)

All the main units are available on right or left connection side (rule: looking in the supply air direction, standing below the ceiling suspended unit)

Accessories list

- › Filters (G4, M5, F7 and F9)
- › Rails (for limited false ceiling space)
- › Rectangular – circular duct transition
- › Pre and post – heater electric coil
- › Heating and/or cooling water coil
 1. Two or three ways valve
 2. Modulating valve actuator
- › Silencers
- › CO₂ sensor
- › Humidity (%RH) sensor
- › Temperature probe
- › BACnet protocol interface
- › Modbus protocol interface
- › Commissioning module

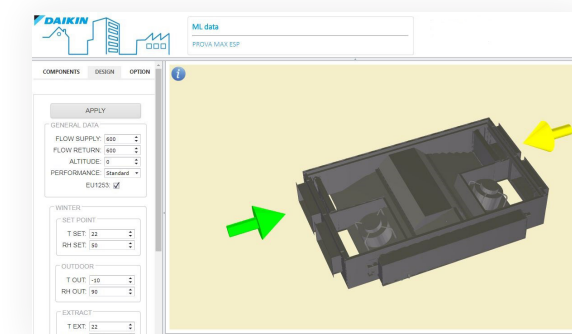


Astra selection sample

Flexibility to meet your needs


Heat exchanger

- › Premium quality counterflow plate heat exchanger
- › Up to 93% of the thermal energy recovered
- › VDI 6022 compliant
- › High grade aluminium that allows best corrosion protection
- › Completely joint sealing
- › No screws or rivets in any part

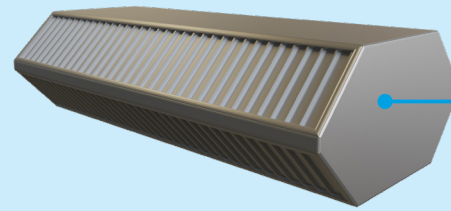

Filters

- › Easily replaceable compact filters which can be removed from bottom access, with large filter surface areas
- › Up to F7 + F9 filtration efficiency
- › No tools are needed to change the filters
- › Fresh air filters* (F7 efficiency as standard)
- › Return filters* (M5 efficiency as standard)



*Optional additional filter and pre-filter stage (G4, M5, F7 or F9)

Supply/Return fan

- › Fan/motor combination with very low noise level
- › Reduced energy consumption
- › Inverter driven with IE4 motor efficiency
- › Infinitely variable speed
- › Ultra-efficient blade profiling
- › Maintenance-free ball bearings
- › No screws or rivets in any part

Unit structure

- › 50 mm Double skin panel thickness
- › Mineral wool insulated
- › Great sound absorption and low noise
- › Hinged or fully removable bottom doors make the unit easy accessible for service and maintenance
- › Unit is accessible from bottom panels

Rectangular duct flange


The standard dimensions are:

- › 250x150 (Size 2)
- › 400x200 (Size 3)
- › 500x300 (Size 4/5)
- › 700x400 (Size 6/7)

› Optional rectangular to circular transition

Bypass damper

- › 100% automatic bypass damper with proportional opening for antifreeze and free cooling operation

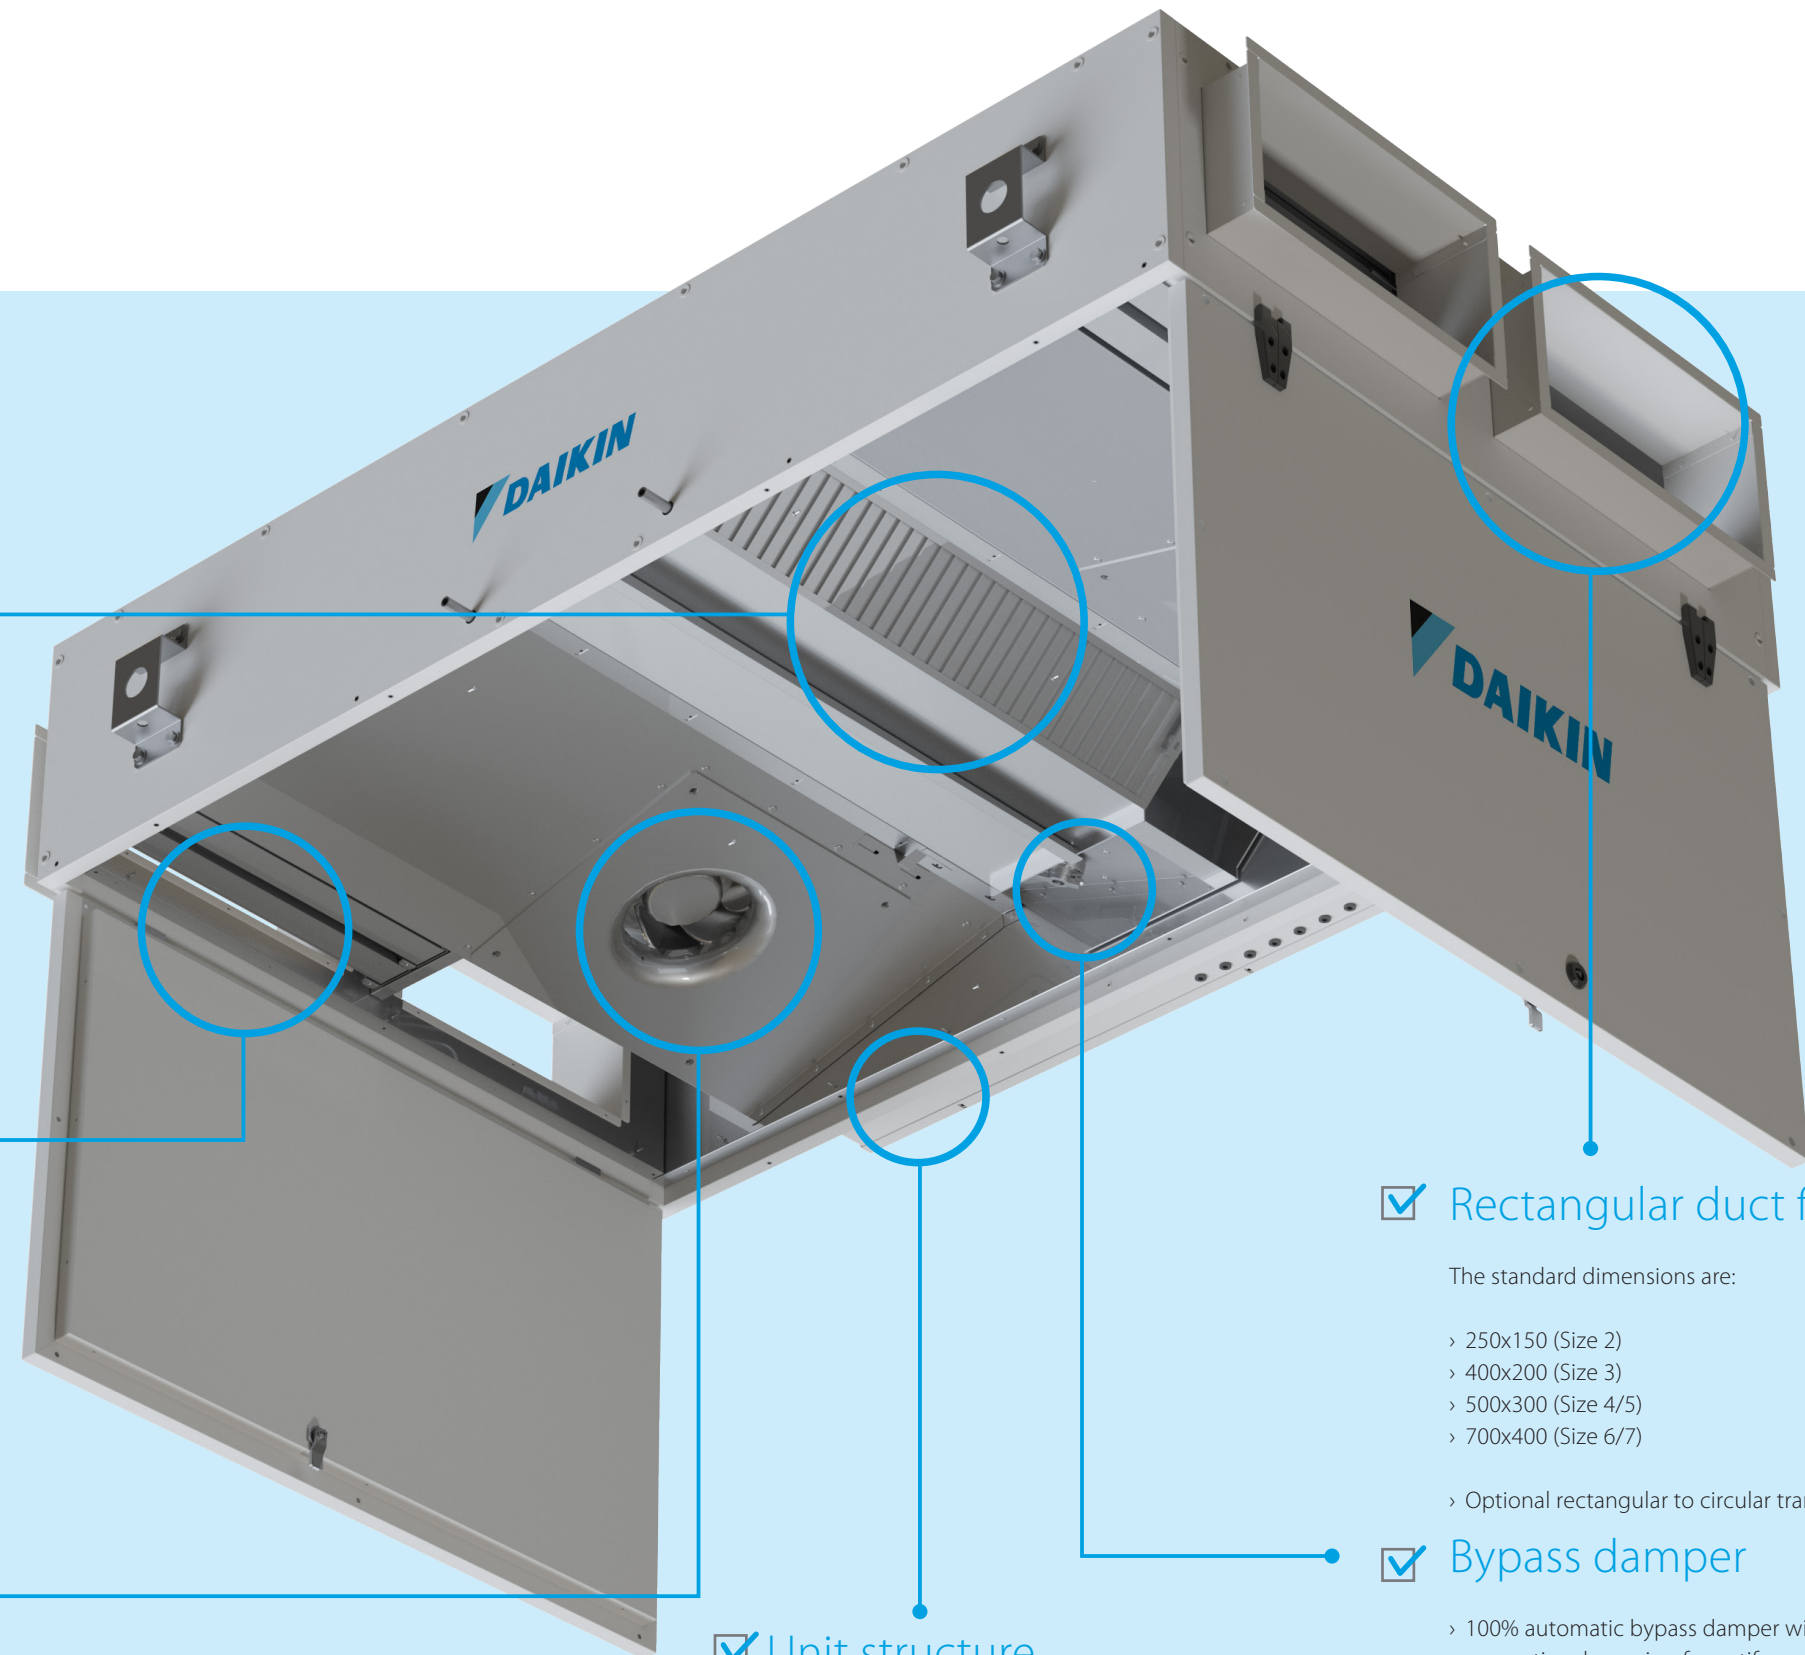





Modular Light

Control logic

- › Unit delivered as a standard with its room thermostat
- › Intelligent defrost logic to reduce energy consumption
- › Air quality analysis with the capability of monitoring and control the actual level of CO₂ optional sensor (accessory)
- › Full automatic bypass to manage free cooling
- › Filter alarm in accordance with the EU Reg 1253
- › Open communication protocols (BACnet and Modbus) that guarantee BMS, iTM and Daikin On Site compatibility

Air flow range

Modular Light is available in 6 sizes covering a wide range of applications such as hotels, offices, schools and light commercial buildings

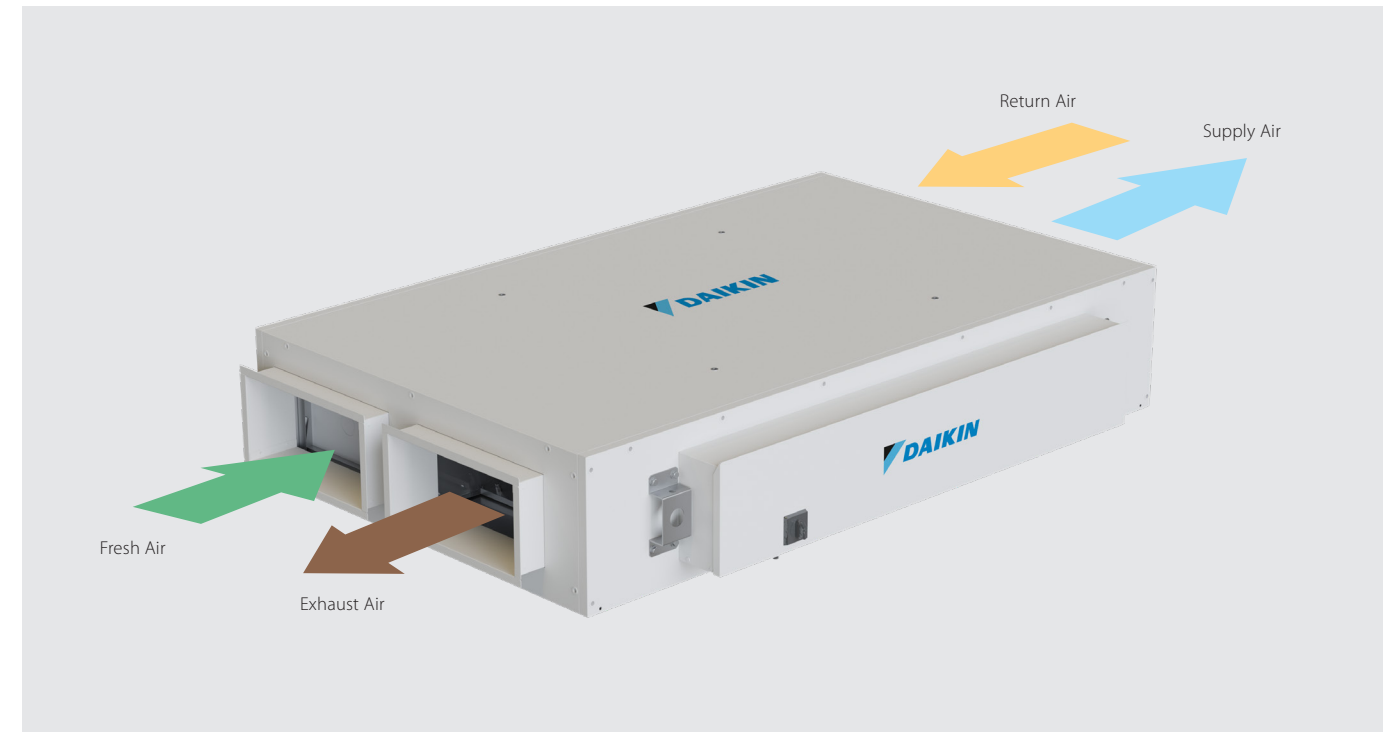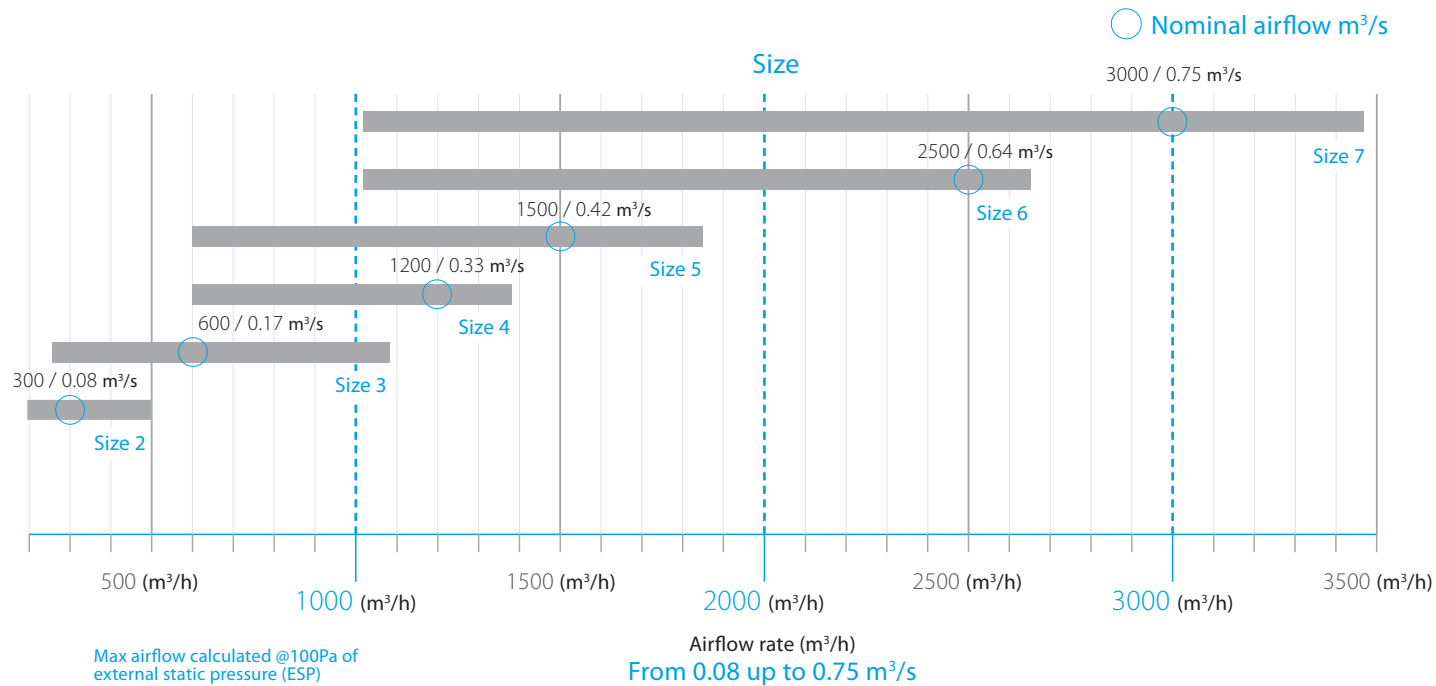

Association and Certification

Since 2010 Daikin is certified Eurovent, actively working on the development of the certification schemes together with EU legislation.



Since 2015 Daikin is proud member of RLT association, participating to the RLT certification scheme.

Technical details

Exceeding ErP 2018 requirement

D-AHU Modular L		2	3	4	5	6	7	
Airflow	m ³ /s	0.08	0.17	0.33	0.42	0.64	0.75	
Heat exchanger thermal efficiency ¹	%	93	93	93	92	94	93	
External static pressure	Nom. Pa	100	100	100	100	100	100	
Current	Nom. A	0,52	1,17	1,91	2,48	4,39	5,39	
Power input	Nom. kW	0,12	0,27	0,44	0,57	1,01	1,24	
SFPv ²	kW/m ³ /s	1,24	1,49	1,25	1,31	1,42	1,46	
ERP compliant		ErP 2018 Compliant						
Electrical supply	Phase	ph	1	1	1	1	1	
	Frequency	Hz	50/60	50/60	50/60	50/60	50/60	50/60
	Voltage	V	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac	220/240 Vac
Main unit dimensions	Width	mm	920	1100	1600	1600	2000	2000
	Height	mm	280	350	415	415	500	500
	Length	mm	1660	1800	2000	2000	2000	2000
Rectangular duct flange	Width	mm	250	400	500	500	700	700
	Height	mm	150	200	300	300	400	400
Unit Sound Power Level (Lwa)	dB	50	57	57	53	61	58	
Unit Sound Pressure Level ³	dBA	33	39	39	35	43	40	
Weight unit	kg	125	180	270	280	355	360	
Unit Price		£4,123.00	£4,861.00	£6,366.00	£7,127.00	£9,124.00	£9,710.00	

1. Winter design condition: Outdoor: -10°C,90% Indoor: 22°C,50%

2. SFPv is a parameter that quantifies the fan efficiency (the lower it is the better will be). The SFP figure shown in the above table is based at the nominal airflow and nominal ESP shown.

3. EN 3744. Surrounding, Directivity (Q) = 2, @1,5m distance

Notes:

Price includes, F7 Supply filter, and M5 Return filter Mineral wool insulation, Aluzinc internal skin and Aluzinc Pre-Painted external skin.

Ancillary modules include Silencers, Electric Frost Coils & various Heating/Cooling Coil Modules.

Final pricing will be dependent on actual selection configuration and additional modules required. Above pricing will provide a sufficiently accurate indication for budget purposes.

Accessories

Options & Accessories	2	3	4	5	6	7
Compact Filter						
G4	£17.00	£19.00	£24.00	£24.00	£27.00	£27.00
M5	£48.00	£66.00	£90.00	£90.00	£109.00	£109.00
F7	£50.00	£70.00	£93.00	£93.00	£111.00	£111.00
F9	£55.00	£74.00	£97.00	£97.00	£114.00	£114.00
Silencer	900mm	£183.00	£267.00	£361.00	£361.00	£515.00
Sensors						
CO2		£404.00	£404.00	£404.00	£404.00	£404.00
Humidity (%RH)		£233.00	£233.00	£233.00	£233.00	£233.00
Temperature		£48.00	£48.00	£48.00	£48.00	£48.00
Coil modules						
Electric pre - heating		£1,075.00	£1,121.00	£1,494.00	£1,494.00	£1,957.00
Electric post - heating		£1,090.00	£1,149.00	£1,775.00	£1,775.00	£1,957.00
Water cooling (post - heating)		£715.00	£827.00	£999.00	£999.00	£1,367.00
Water heating (pre/post - heating)		£324.00	£339.00	£484.00	£484.00	£667.00
Mechanical accessories						
Rail		£114.00	£123.00	£139.00	£139.00	£150.00
Valves						
2-way water heating		£44.00	£48.00	£64.00	£64.00	£70.00
3-way water heating		£54.00	£64.00	£70.00	£70.00	£74.00
2-way water cooling		£44.00	£48.00	£64.00	£64.00	£70.00
3-way water cooling		£54.00	£64.00	£70.00	£70.00	£74.00
Electrical Accessories						
Modulating Valve Actuator		£199.00	£199.00	£199.00	£199.00	£199.00
Controls						
Module Bacnet Interface		£214.00	£214.00	£214.00	£214.00	£214.00
Module Modbus Interface		£138.00	£138.00	£138.00	£138.00	£138.00
Room Thermostat (included in Main Unit)		£92.00	£92.00	£92.00	£92.00	£92.00
Commissioning Module		£241.00	£241.00	£241.00	£241.00	£241.00



For more information email info@daikinapplied.uk or visit www.daikinapplied.uk

For all Daikin Applied UK,
Daikin Applied Service &
Spares enquiries call us on:
0345 565 2700



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP), Air handling units (AHU), Fan coil units (FCU) and variable refrigerant flow systems (VRF) Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V. Printed on non-chlorinated paper.



Valid till Dec 2018