



★ SINCE 1947 ★

DEKS

DRAINAGE

BY DESIGN



OUR VISION


Our vision is to provide innovative product solutions by design and delight our customers with operational excellence at every step, ensuring we are their preferred and trusted partner of choice, helping them succeed.

OUR MISSION

DEKS' customer focus helps our customers find the right 'fit and forget' solution by design to solve their problems. We leverage our global manufacturing capability to design, develop and deliver solution oriented construction products, for the wholesaler, contractor and manufacturer to maximise their success.

CONTENTS

- 5 **DEKDRAIN** Threshold
- 6 - 7 **DEKDRAIN** A15
- 8 - 9 **DEKDRAIN** Edge - A15 / B125
- 10 - 13 **DEKDRAIN** EEZEE - B125 & C250
- 14 - 16 **VALUEFLEX** EPVC Couplings | Flap Value | Non Return Value
- 17 Universal Rainwater | Waste Adaptor
- 18 - 19 **SALES TEAM** Contact Details

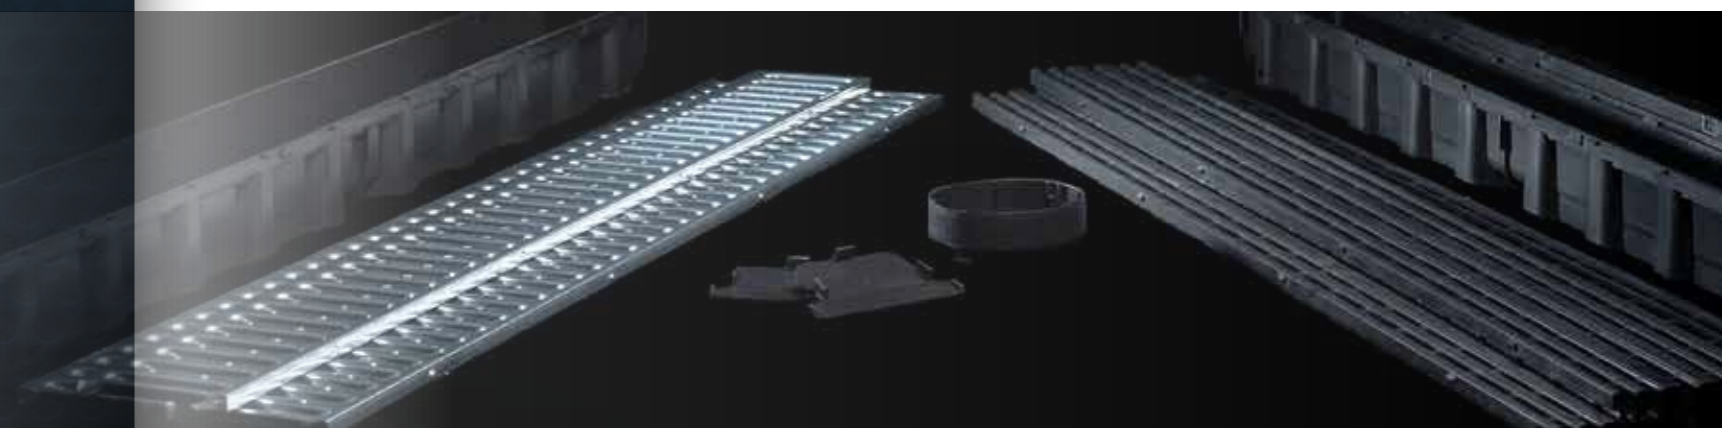

WHY ACCEPT THE NORM?



EN1433

- Cost Effective ▪ Unique
- Game Changer ▪ Easy ▪ Stylish



A15



A15 & B125 EDGE



B125 EEZEE



C250 EEZEE



DEKDRAIN THRESHOLD

SLEEK DESIGN
A SUCCESSFUL SOLUTION

Why choose DekDrain Threshold?

DekDrain Threshold is a combination of our successful A15 Linear Bar and C250 Wave grating design that offers both a sleek designer look and superior water capture, for a fabulous front door finish with lots of benefits.



Beyond its fabulous looks, is a dry weather channel that provides maximum self-cleansing and flow through by design. Wave style Heel Shield slots prevent any shoe type from trapping. The grating is easily removable with the clip-in system. A sleek compact access box/corner quad can also be used for directional changes as well as for cleaning when required.

DekDrain Threshold is packaged in a kit containing:

- 1 x Channel and A15 grating
- 1 x Corner quad
- 2 x End caps
- 1 x Bottom clip in connector



PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-T-HWT	A15	Wave	114mm	78mm	1000mm

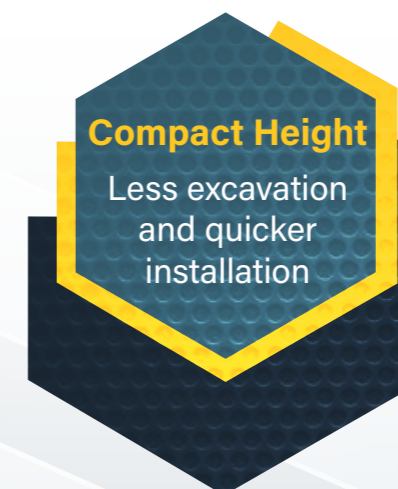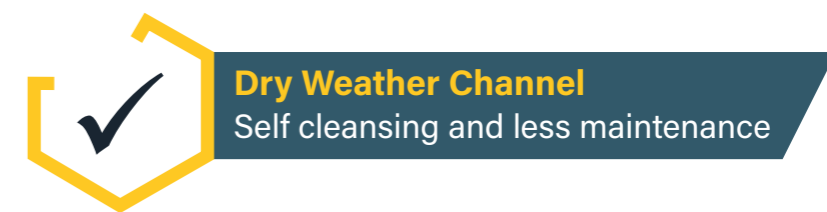



DEKDRAIN A15

CHANNEL DRAINAGE THAT MAKES SENSE

A Brand New Design In Our Plastic Channel Drainage

DekDrain A15 Plastic Channel Drainage features a new engineered design in channel drain. Due to its plastic linear bar grating design, water flow is disrupted and protects against traversing water, unlike traditional gratings. Measuring 78mm in depth, its perfect for your paving projects. Also featuring the new push fit, clip in bottom outlet

which makes for simple, quick, user-friendly assembly. Each channel measures 1000mm, with a cutting and jointing point at 500mm for applications that require a shorter length. Connect (with an accessory bag) to 110mm plastic pipe with an outlet junction located at either end of the channel for ease of use.

Certified to BS EN 1433, DekDrain is a high quality, yet cost effective solution for stylish surface drainage. Also available in traditional slotted galvanised grating.

Find out more at www.deks.co.uk/a15



78mm Channel Depth
Ideal for all paving projects

2 Point Bottom Outlet Positioning
Outlet located at either end to 110mm

1.5 tonnes
A15 - Designed for maximum weight of 1.5 tonnes

CHANNEL LENGTHS 1000 x 78mm



A15 channel drain 1000mm (L) x 114mm (W) x 78mm (H), available in new linear bar design plastic grating or slotted galvanised steel grating.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-1M-GS-M	DekDrain A15 HDPE Channel Galvanised Grate 1m	Galvanised / Plastic
DCD-1M-PL-M	DekDrain A15 HDPE Channel Plastic Grate 1m	Plastic / Plastic

CORNER QUADS Are Connectable



Connect your DekDrain in up to four different directions or change direction with a corner quad. Available to match both plastic and galvanised grating styles.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-CQ-GS-M	DekDrain A15 Corner Quad with Galvanised Grate	Galvanised / Plastic
DCD-CQ-PL-M	DekDrain A15 Corner Quad with Plastic Grate	Plastic / Plastic

ACCESSORY Bag



The accessory bag contains 1 x outlet connector and 2 x end caps. Use the end caps to close off the ends of the channel drainage. The outlet connector simply clips into place on the bottom of the channel and connects to 110mm plastic pipe.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-AS-M	DekDrain A15 Accessory Bag (2 x End Caps, 1 x Bottom Outlet Connector)	Plastic

GARAGE PACK Channels



For perfect garage drainage, use a garage pack. Everything you need to provide stylish surface drainage for your garage. Includes 3 x 1000mm x 78mm channels and an accessory bag.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-GP-GS	DekDrain A15 Garage Pack (3 x Channel with Galv Grate + Accessory Bag)	Galvanised / Plastic
DCD-GP-PL	DekDrain A15 Garage Pack (3 x Channel with Plastic Grate + Accessory Bag)	Plastic / Plastic



DEKDRAIN EDGE

**CUTTING EDGE FINISH
RATED UP TO B125**

Why choose DekDrain Edge? **DekDrain Edge Aluminium 'slot' drain is market leading.**

Add a cutting edge finish to your drainage design, with a clean stylish look.

In a tremendous leap forward, DEKS are bringing a cost effective Metal Edge Slot Drain to the domestic patio and driveway market. For use as an A15 or B125 drain.

DekDrain Edge offers a unique and envied look to the finish, where it matters, (previously only available in more expensive full steel products). Each slot wall is capped with a fabulous looking square faced, visible, non-rusting, polished aluminium edge.

Additionally, Edge is a fabulous substitute for use as a Threshold Drain, finishing off the connect between hard landscaping and property.

The 82mm upstand ensures the paving has enough space for a securing bed of mortar to fix and forget, with no need to trim the back edge off pavers.

Featuring an overall height of just 167mm (<2 brick courses), Edge will sit above the concrete slab with ease. Excavation time is optimised to offer you savings on installation.

Designed with an ovoid shape, creating a dry weather channel. This ensures water flows better, acting as a self-cleansing agent to the last drop, reducing maintenance, risk of blockages and cleaning.

Use of the stylish access quad-box gives you discreet access for washing out silt when necessary.



scan me

EN1433 Rated

Narrow Slot Aluminium Edge

Strong, stylish and rust proof

Compact Height & 82mm Upstand

No need to cut paving, less excavation

Dry Weather Channel

Self cleansing and less maintenance



DEKDRAIN EDGE Slot Drain A15 & B125



Measuring 1000mm (L) x 167mm (H) x 98mm (W) with an 82mm upstand for easy laying. Rated for use up-to B125.

PRODUCT CODE	DESCRIPTION
DCD-SD-M	DekDrain Slot Drain Metal Edge

DEKDRAIN EDGE Corner Quad



- Quad features elegant surface grating
- Quad provides an access point - easy cleaning
- Use Quad for directional changes
- No screws needed - easy connection to drain pipe
- Rated for use up to A15

PRODUCT CODE	DESCRIPTION
DCD-SD-CQ	DekDrain Slot Drain Corner Quad

DEKDRAIN EDGE Accessories



- Clip in connections - quick fitting
- Outlet connects to 110mm pipe

PRODUCT CODE	DESCRIPTION
DCD-SD-AS	DekDrain Slot Drain Accessory Bag (2 x end cap, 1 x outlet)

For more information visit www.deks.co.uk/edge

technical information

installation instructions

how-to videos



DEKDRAIN EEZEE

EEZEE OPTION WITH COLOSSAL ADVANTAGES

DekDrain Eezee comes complete and hassle free

Featuring 6 cut points, enabling end to end interlocking stability on runs with cuts.

Easily create a socket/spigot channel with no butted joints at 300 / 400 / 600 / 700 & 800mm lengths. Cutting to 500mm leaves an end butt joint. Cuts between 300 - 500mm and 800 - 1000mm will allow full grating lockdown.

Eezee channel provides you with 12 drain connection points alongside the ability to interlock in 8 directions, creating crosses, tees, and staggered runs without additional fittings.

Save money and time. Get the job done faster with less components.

HDPE is silky smooth for self-cleansing and reduced silt build up which reduces maintenance costs and cleaning.

A relatively lightweight yet strong material provides a robust channel which is less prone to transit or onsite breakages, reducing downtime.



DEKDRAIN Eezee

Available in both B125 and C250 options to suit the scheme. The channel measures 1000mm (L) x 131mm (W) x 98mm (H).

- Each 500mm grating is secured by a bolt and locking bar
- Easily create a 90-degree tee or elbow with no corner quads
- Flexible outlet connections - 12 outlet options to best suit your installation
- No additional fittings needed - Eezee saves money
- Certified EN1433

GRATING STYLES



EEZEE B125 GRID

- All plastic super strong, slip proof, narrow slot grid profile grating with massive benefits on installation
- HDPE Channel PVC Grid Grating
- B125 is certified for use on driveways, car parks, pedestrian areas, pathways




EEZEE C250 WAVE

- Up-style your drainage scheme with our fantastic wave linear grating! "Super Sleek styling - Amazing Water Capture"
- HDPE Channel with Ductile Iron Grating
- C250 is certified for use on driveways, pedestrian areas, pathways, lightly trafficked roads & kerbside small private car parks, light goods areas

NO CORNER QUADS REQUIRED

Each Eezee length features three connection points on each side of the channel body, as well as connection points at either end of the channel.

Easily create the channel layout that you need to complete the job. Simply remove the blanking cap on the connection point you are using and connect the next length of channel by slotting it into place. The connection securely holds in place during installation.

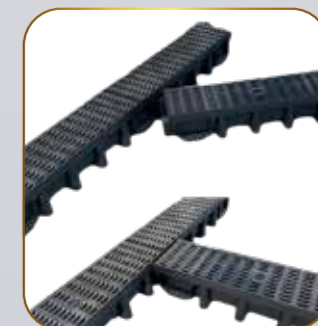

PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-EZ-98-B125-G/B	B125	Grid	131mm	98mm	1000mm
DCD-EZ-98-C250-W/B	C250	Wave	131mm	98mm	1000mm

Grid & Wave Design Grating

Stylish and great performance

12 Outlet Options

Easily connect to underground drainage

Easy & Clean to Cut vs Concrete

No heavy machinery - No dust clouds

Easy to Order & Available in

B125 & C250 weight classes

PP Channel, PVC & Ductile Iron Grating

Light weight, easy to handle, fewer damages



scan me

DEKDRAIN EEZEE OUTLETS

If you like choice, you'll love DekDrain Eezee

A single length has 12 outlet options and 11 outlet points. All of these options are created from only three additional connections. DCD-EZ-98-SPEC outlet end cap can also double as a blanking off end caps.



6 SIDE OUTLETS

Use DCD-EZ-98-SPEC to connect from these outlets to a 50mm pipe (also use to connect to another channel)

SOCKET END

To connect from the socket to a 50mm pipe use DCD-EZ-98-SOEC or DCD-EZ-98-SOOO to connect to a 100mm drainage

SPIGOT END

SPIGOT END

To connect from the spigot connection to a 50mm pipe use DCD-EZ-98-SPEC

3 BOTTOM OUTLETS

Connect directly to 100mm underground drainage fitting (spigot end)

PRODUCT CODE	DESCRIPTION
DCD-EZ-98-SOEC	Socket End Cap for Eezee Channel Black C/W 50mm Outlet Option
DCD-EZ-98-SOOO	Socket Offset Outlet to 110mm for Eezee Channel Black
DCD-EZ-98-SPEC	Spigot End Cap for Eezee Channel Black C/W 50mm Outlet Option

DEKDRAIN EEZEE SILT BOX

Used to keep the channel drainage free of silt or dirt, maintaining the ability for the water to continue flowing freely and efficiently.

DekDrain Eezee silt box comes complete with a silt basket.

Measures 500mm (L) x 131mm (W) x 280mm (D).

Features one 110mm outlet connector on each side.



PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-EZ-SB98-B125-G/B	B125	Grid	131mm	280mm	500mm
DCD-EZ-SB98-C250-W/B	C250	Wave	131mm	280mm	500mm

DekDrain EEZEE Outlet Connector



* Illustration purposes only - does not include end cap

Used to connect from Eezee 2" outlet end caps to 4" underground drainage pipe. The outlet connector is rotational in any direction as well as adjustable from 0-90 degrees.

PRODUCT CODE	DESCRIPTION
DCD-EZ-OC	DekDrain Eezee 2-4" Universal Variable Connector

USEFUL INFORMATION FOR EEZEE



KEY MEASUREMENTS



OUTLET CONNECTOR GUIDE



EEZEE INSTALLATION GUIDE



OUR VALUE DISCIPLINES

PRODUCT LEADERSHIP

DEKS aims to lead the charge in product development. We focus on investment and research in order to develop products that not only lead the market but also remain well ahead of any competition.

OPERATIONAL EXCELLENCE

DEKS aims to lead the market through price and convenience. The goal is not to simply be the cheapest but truly create an environment for the customer where efficiency is maximised, and friction is minimised or completely eradicated.

CUSTOMER INTIMACY

DEKS is obsessed with understanding the individual customer detail. We aim to excel in customer service and customer attention. Customer intimacy goes beyond understanding our customers' needs and wants. It means having a full range of services available to help serve our customers on demand.

EPVC COUPLINGS



ELBOWS & TEES

- Collapsible fittings for tricky plumbing applications



COUPLINGS


- Connects pipes that are the same in diameter
- Connects pipes that are two different diameters

END CAPS

- Provide secure air and water tight seals



WATER MANAGEMENT

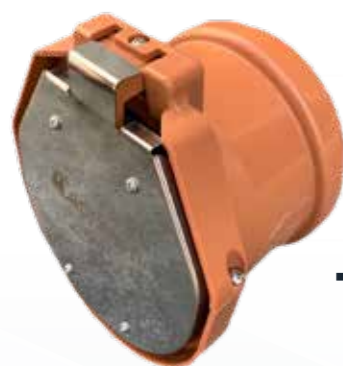

FLAP VALVE

- No backward waterflow
- Protects from rodents
- Seals outfalls

NON RETURN VALVE

- No backward waterflow
- Protects from smells and rodents



VALUEFLEX EPVC Adaptor Couplings



Adaptors will connect two pipes of different diameters.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DACE-44-37	ValueFlex 1.5" x 1.25"	44-36mm to 37-29mm
DACE-57-37	ValueFlex 2" x 1.25"	57-49mm to 37-29mm
DACE-57-44	ValueFlex 2" x 1.5"	57-45mm to 44-36mm
DACE-60-48	ValueFlex 2.5" x 1.5"	60-48mm to 48-40mm
DACE-77-48	ValueFlex 3" x 1.5"	77-60mm to 48-40mm
DACE-89-48	ValueFlex 3" x 1.5"	89-75mm to 48-40mm
DACE-89-60	ValueFlex 3" x 2"	89-75mm to 60-48mm
DACE-111-48	ValueFlex 4" x 1.5"	111-100mm to 48-40mm
DACE-112-60	ValueFlex 4" x 2"	112-100mm to 60-48mm
DACE-114-89	ValueFlex 4" x 3"	114-97mm to 89-75mm
DACE-120-114	ValueFlex 4" AC to 4" CI/PVC	120-108mm to 114-97mm
DACE-122-48	ValueFlex 5" x 1.5"	122-115mm to 48-40mm
DACE-133-89	ValueFlex 4" EW to 3" CI/PVC	133-121mm to 89-74mm
DACE-4000	ValueFlex 4" EW to 4" PVC	137-122mm to 114-97mm
DACE-162-114	ValueFlex 6" x 4"	162-147mm to 114-97mm
DACE-190-114	ValueFlex 6" EW to 4" CI/PVC	190-170mm to 114-97mm
DACE-190-170	ValueFlex 6" EW to 6" CI/PVC	190-170mm to 170-150mm
DACE-6000	ValueFlex 6" EW to 6" PVC	196-176mm to 162-142mm
DACE-215-162	ValueFlex 8" x 6"	215-195mm to 162-142mm

- EW = CLAY (CHECK PIPE OD)
- CI = CAST IRON
- PVC = PLASTIC
- AC = ASPESTOS CEMENT

VALUEFLEX EPVC Pipe Couplings



Pipe couplings will connect pipes which are similar or the same in diameter.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DPCE-27	ValueFlex 0.75" x 0.75" PVC	27-22mm
DPCE-34	ValueFlex 1" x 1" PVC	34-24mm
DPCE-37	ValueFlex 1.25" x 1.25" PVC	37-27mm
DPCE-49	ValueFlex 1.5" x 1.5"	49-41mm
DPCE-61	ValueFlex 2" x 2" PVC	61-46mm
DPCE-70	ValueFlex 2.5" x 2.5" PVC	70-55mm
DPCE-84	ValueFlex 3" x 3"	84-69mm
DPCE-92	ValueFlex 3" x 3" PVC	92-80mm
DPCE-114	ValueFlex 4" x 4" PVC	114-97mm
DPCE-127	ValueFlex 4" x 4" CI/PL	127-110mm
DPCE-142	ValueFlex 4" x 4" EW	142-122mm
DPCE-170	ValueFlex 6" x 6" PVC	170-150mm
DPCE-190	ValueFlex 6" x 6" EW	190-170mm
DPCE-220	ValueFlex 8" x 8" PVC	220-200mm



VALUEFLEX EPVC Elbows and Tees

Solve tricky plumbing applications with collapsible fittings.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DECE-L-48	ValueFlex Elbow 1.5"	48-40mm
DECE-T-48	ValueFlex Tee 1.5"	48-40mm
DECE-L-60	ValueFlex Elbow 2" x 2"	60-48mm
DECE-T-60	ValueFlex Tee 2" x 2"	60-48mm
DECE-L-89	ValueFlex Elbow 3" x 3"	89-75mm
DECE-T-89	ValueFlex Tee 3" x 3"	89-75mm
DECE-L-114	ValueFlex Elbow 4" x 4"	114-197mm
DECE-T-114	ValueFlex Tee 4" x 4"	114-197mm



VALUEFLEX EPVC End Caps

Provide secure air and water tight seals.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DECE-EC-48	Value-Flex End Cap 1.5"	48-40mm
DECE-EC-60	Value-Flex End Cap 2"	60-52mm
DECE-EC-89	Value-Flex End Cap 3"	89-75mm
DECE-EC-114	Value-Flex End Cap 4"	114-97mm
DECE-EC-140	Value-Flex End Cap 5"	140-125mm
DECE-EC-160	Value-Flex End Cap 6"	160-145mm
DECE-EC-215	Value-Flex End Cap 8"	215-195mm



WATER MANAGEMENT Flap Valve

Devices for protecting rooms on the lower levels against flooding caused by backward flow of storm water and sewage. Flap valves also effectively protect drainage systems from rodents entering the building and sealing outfalls where they exist.

PRODUCT CODE	DESCRIPTION
FV-110	Flap Valve 110mm
FV-160	Flap Valve 160mm



WATER MANAGEMENT Non-Return Valve

Non-return valve effectively seals your underground pipe work from a back flow of storm water, rodents and smells.

PRODUCT CODE	DESCRIPTION
NRV-110	Non Return Valve 110mm
NRV-160	Non Return Valve 160mm

UNIVERSAL Waste Adaptor




UWA100 Accepts 22mm to 60mm (3/4" - 2") waste pipe. External waste pipes can be connected directly to a surface water drain, or depending on the design, via a gully trap to the underground drainage system. Simply cut the UWA100 to the required pipe size.

PRODUCT CODE	DESCRIPTION
UWA100	110mm Universal Waste Adaptor



- Easily cut to size to fit 22-60mm (3/4" - 2") waste pipe
- Can be used as an adaptor or stopper
- Stops construction debris from blocking drains when used as a stopper

UNIVERSAL Rainwater Adaptor

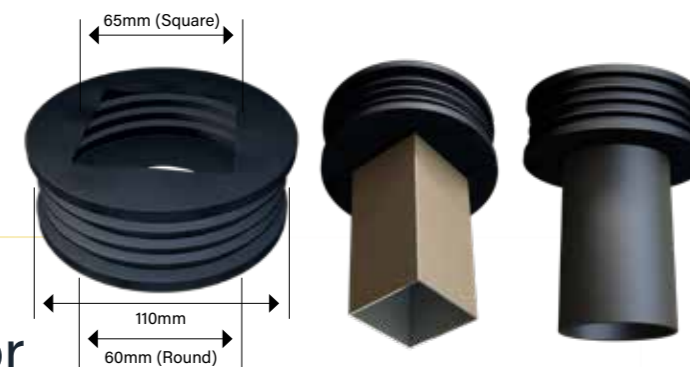


URA100 Accepts 60mm round and 65mm square down. External rainwater downpipe can be connected directly to the surface water drain or, depending on the design, via a gully trap to the underground drainage system.

PRODUCT CODE	DESCRIPTION
URA100	110mm Universal Rainwater Adaptor



- Manufactured from high quality EPDM
- Connects all 110mm round & square rainwater pipes
- Low cost universal solution
- Tidy post fix appearance

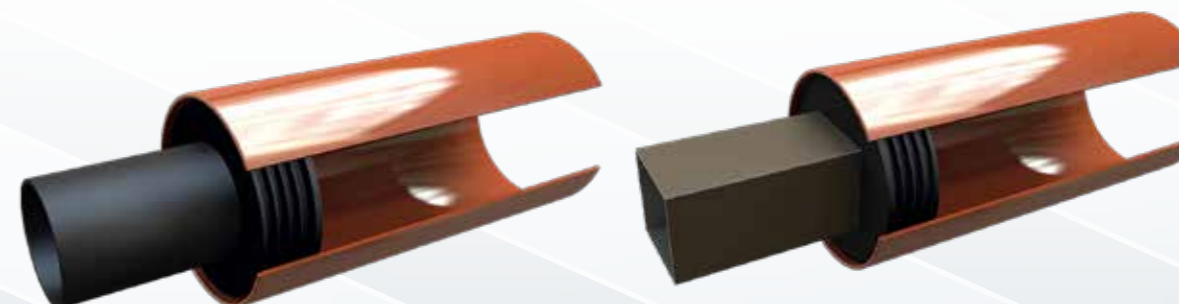



✉ sales@deks.co.uk


🌐 www.deks.co.uk

☎ 01275 858 866



DEKS Industries Europe Ltd
West End Trading Estate
Blackfriars Road
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.

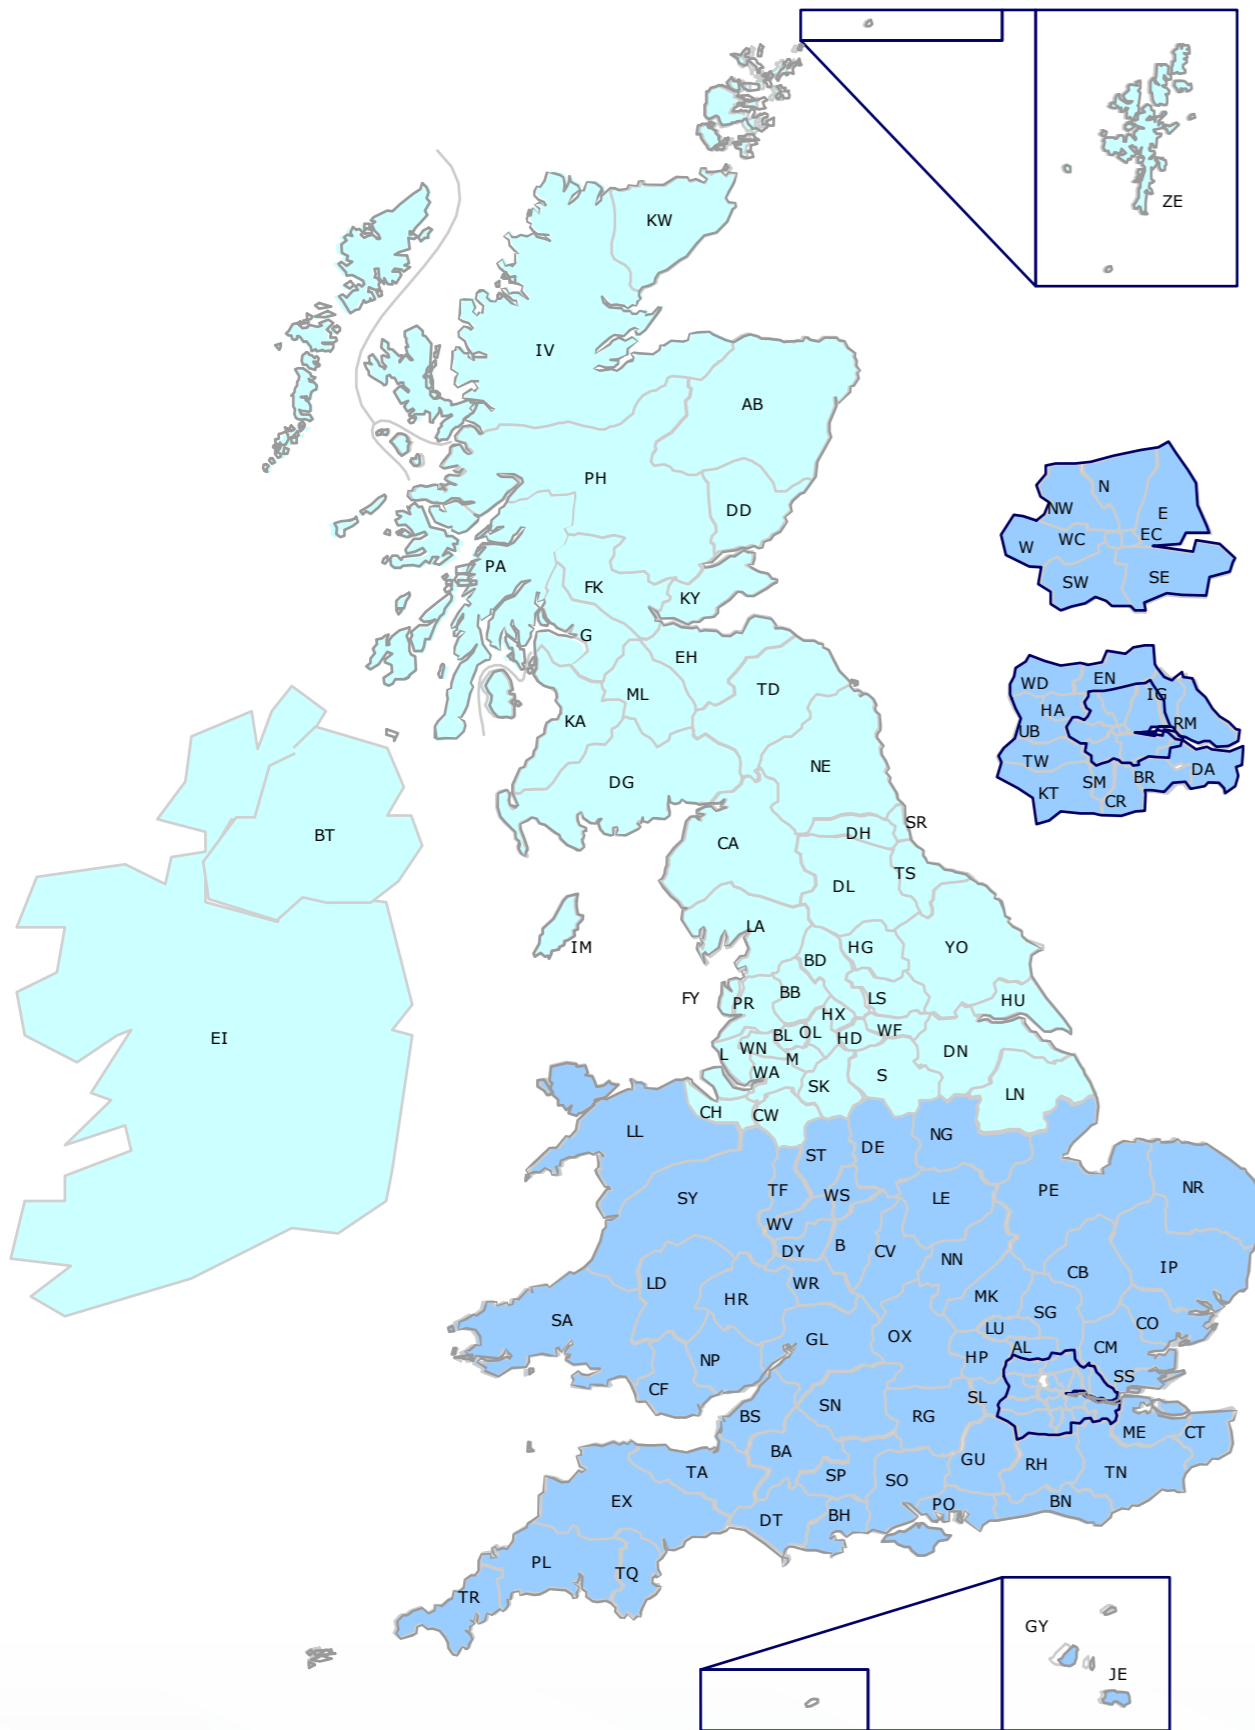

Martin Hipkin
martinh@deks.co.uk
07780 446 597

Mark Stewart
marks@deks.co.uk
07903 389 220

**INSIDE SALES
ACCOUNT EXECUTIVE**
Lisa Spiller
lisas@deks.co.uk
01275 866 985



 sales@deks.co.uk

 www.deks.co.uk

 01275 858 866



DEKS Industries Europe Ltd
West End Trading Estate
Blackfriars Road
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.