

EWAD TZ-C

Inverter Screw Chiller

Top efficiency
chiller for comfort
and process
cooling



AHUs

CHILLERS

PROJECTS

SERVICE

Why choose Daikin Applied

Daikin Applied were among the first to pioneer the use of inverters in air cooled screw chillers. Today, our next generation of inverter technology makes both comfort and process cooling even more efficient and cost-effective.

- › Optimum efficiency (at both partial and full loads).
- › Lower noise level (down to just 90 dB(A)).
- › Higher energy efficiency than ever before.
- › Reduced running costs without compromising on climate comfort or performance.
- › Integrated inverter featuring Variable Volume Ratio (VVR) technology and Direct Current (DC) motors.
- › Premium features such as Micro-Channel condenser coils and precision electronic expansion valves.



EWAD TZ-B

High performance energy efficient
comfort cooling


Why choose EWAD TZ-C chiller series

1 Top class efficiency:

EER up to 3.6
ESEER up to 5.5


Best choice for every application

Rapid payback: 1 year for process cooling and 3 years for comfort cooling applications.

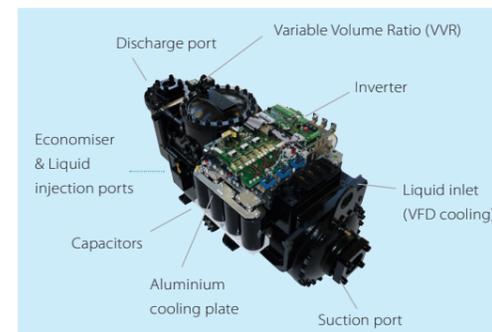


✓ New generation of Daikin Applied inverter screw compressors

- › Integrated inverter, refrigerant cooled
- › Variable volume ratio technology

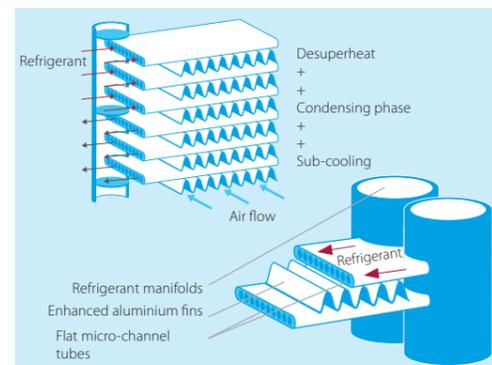

✓ Micro-channel condenser coils

- › High thermal efficiency
- › Small volume, resulting in a small refrigerant charge
- › Light & durable design
- › Easy to clean

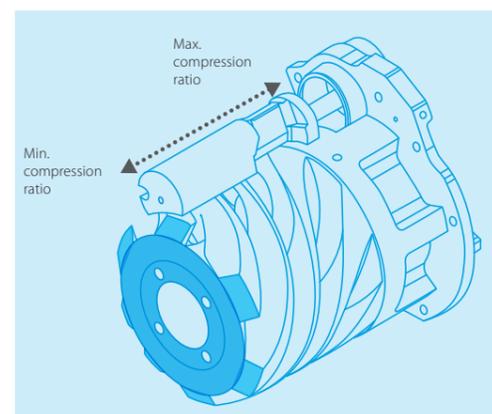

✓ VVR (Variable Volume Ratio)

The operating conditions of a chiller are subjected to sensible changes due to the variation of ambient temperature and load request from the plant.

Screw compressors increase the pressure of the refrigerant by forcing it into a progressive smaller volume, from the suction to the discharge port. Once the geometry of the compressor is defined the volume ratio is also defined.

Daikin Applied compressors can modify their own geometry thanks to variable volume ratio (VVR). The volume ratio will change by moving the sliding valves. VVR changes the point at which the gas leaves the compressor, and therefore changes the pressures at discharge which will be optimised for any condition.




Providing a lifetime of comfort in the most flexible way


2 Silent operation – for distraction-free work

Nothing disrupts the workplace more than the sound of machinery. So our engineers have brought the sound power levels right down to just 90 dB(A)* at full load operating conditions - and even lower at part load conditions. Thanks to the special acoustic solutions on the compressor and a custom Daikin fan design with reduced noise impact and vibration, the EWAD TZ-B is ideal for even the most sound-sensitive environments.

*400 kW size

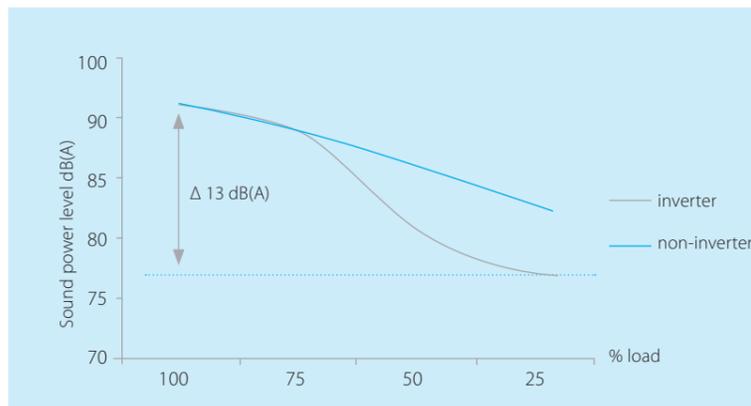

3 Application flexibility

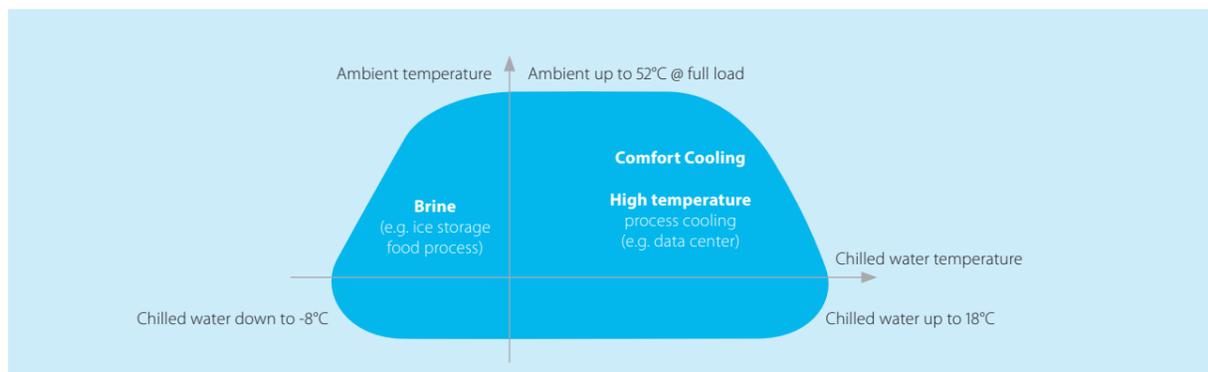

4 Compact design

The EWAD TZ-B keeps installation space at a minimum, so it's ideal for both new and retrofit projects. In particular, the highly efficient compressor with its integrated inverter allows us to mount more compact heat exchangers in the frame and, combined with the integrated compact control panel, deliver more power from a reduced footprint.

5 Simple to install. Even simpler to maintain

Our chillers are wired at the factory and are also pre-commissioned, with the unit's software tuned and set points already established. They also integrate easily with existing building management systems. So, on site, all that is required is to plug the unit into the power supply, connect any pipes and wires, and switch the unit on.

6 Proven reliability

All our chillers and compressors are subjected to intensive performance, acoustic, endurance and vibration tests in our Daikin Applied factories and at selected job-sites, even at extreme working conditions. To ensure maximum reliability in every component – and the right, lifelong technical solution for your application.

7 Extensive options list

- › **Rapid restart** - loss of cooling can be catastrophic, the chiller can restart within 30 seconds of the power being restored and reach full-load cooling capacity in less than 6 minutes
- › **VFD pumps** - variable frequency pumps can be used to optimise the working efficiency of the chiller and thus maximise energy savings, also in primary only variable flow systems
- › **Refrigerant leak detection** - rapid advanced warning of trouble, so you can avoid any environmentally harmful and potentially costly leaks in the refrigerant system. **BREEAM Compliant**
- › **Heat recovery** - a plate to plate heat exchanger for each refrigerant circuit is installed in series to the condenser coil. 15 to 85 % of the total heat rejection of the chiller can be recovered
- › **Partial heat recovery** - a plate to plate heat exchanger for each refrigerant circuit is installed in series to the air condenser coil. The plant manager controls the operation of the pump on the recovery circuit. 15 to 20 % of the total heat rejection of the chiller can be recovered
- › **Smart sequencing capability** - master/slave sequencing function up to 4 units connected together for system optimisation and without the need of external control systems

Cooling only				EWAD-TZSRB																																											
Cooling capacity	Nom.			160	190	240	270	300	360	380	450	495	570	610	660	700	820	900	990	C10	C11																										
Power input	Cooling	Nom.	kW	169	201	235	269	306	351	394	455	499	569	610	659	700	800	895	956	1,013	1,067																										
EER				2.99	2.87	2.83	2.99	2.82	2.95	2.81	2.76	2.85	2.86	2.80	2.74	2.80	3.229	3.043	3.016	3.018	2.973																										
ESEER				4.37	4.46	4.30	4.40	4.42	4.50	4.44	4.43	4.47	4.53	4.61	4.60	4.68	4.8	4.85	4.83	4.98																											
Dimensions	Unit	Height	mm	2,483																																											
			mm	2,258																																											
			mm	2,283	3,183			4,083			4,983			5,883			6,783			7,783			8,820			9,591			10,461																		
Weight	Unit	Operation weight	kg	2,166	2,191	2,249	2,475	2,522	2,871	4,244	4,260	4,517	4,803	4,980	5,004	5,274	6,964	6,862	7,217	7,495	7,820																										
			kg	2,186	2,217	2,287	2,501	2,560	2,921	4,402	4,424	4,675	4,961	5,250	5,259	5,529	7,247	7,347	7,702	7,980	8,273																										
Water heat exchanger	Type	Plate heat exchanger																																													
		Single pass shell & tube																																													
		Water flow rate	Cooling	Nom.	l/s	8.1	9.6	11.2	12.9	14.6	16.8	18.8	21.7	23.9	27.2	29.2	31.5	33.5	38.3	42.8	45.7	48.5	51																								
		Water pressure drop	Cooling	Nom.	kPa	25.0	19.3	15.4	32.6	25.2	25.9	25.8	32.2	43.9	55.5	38.6	32.2	35.9	52.1	36.3	41	45.6	36.3																								
Water volume			l	20	26	37	26	37	50	158	164	158	270	255	283			485		453																											
Air heat exchanger	Type	Microchannel																																													
Compressor	Type	Inverter driven single screw compressor																																													
	Quantity		1								2																																				
Fan	Type	Direct propeller																																													
	Quantity		4				6				8				10				12				14				16				18				20				22								
	Air flow rate	Cooling	Nom.	l/s	15,109				22,664				30,219				29,650				36,920				44,475				51,745				59,299				66,570				74,124				81,394		
Speed			rpm	700																																											
Sound power level	Cooling	Nom.	dB(A)	86	87			88			90			91			92			94			95																								
Sound pressure level	Cooling	Nom.	dB(A)	67	68			69			70			70			71			73																											
Operation range	Air side	Cooling	Min.-Max.	°CDB																																											
	Water side	Cooling	Min.-Max.	°CDB																																											
Refrigerant	Type/GWP	R-134a/1,430																																													
	Circuits	Quantity		1								2																																			
Refrigerant charge	Per circuit	kg	27	29	33	38	41	52	29	29.5	34	37.5	38.5	41.5	45	52	58.5	65	71.5																												
		TCO ₂ eq	39	41	47	54	59	74	41	42	49	54	55	59	64	74.36	83.655	92.95	102.245																												
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																																												

Cooling only				EWAD-TZXR8																																						
Cooling capacity	Nom.			190	220	240	290	320	360	420	450	540	570	610	660	770	850	910	C10	C11																						
Power input	Cooling	Nom.	kW	180	211	240	277	313	360	417	472	528	562	599	639	677	764	850	912	1,001	1,045																					
EER				3.46	3.34	3.30	3.13	3.29	3.16	3.24	3.22	3.09	3.11	3.15	3.07	3.373	3.186	3.311	3.302	3.26																						
ESEER				5.11	5.06	4.99	5.09	5.13	5.12	5.09	4.99	5.04	5.05	5.13	5.07	5.09	5.13	5.15	5.22																							
Dimensions	Unit	Height	mm	2,483																																						
			mm	2,258																																						
			mm	3,183	4,083			4,983			5,883			6,783			7,683			8,820			9,591			10,461																
Weight	Unit	Operation weight	kg	2,462	2,509	2,521	2,870	4,492	4,802	5,000	5,272	5,625	6,946	6,862	7,217	7,495	7,820																									
			kg	2,488	2,547	2,559	2,920	4,650	4,960	5,255	5,527	5,880	7,247	7,347	7,702	7,980	8,273																									
Water heat exchanger	Type	Plate heat exchanger																																								
		Single pass shell & tube																																								
		Water flow rate	Cooling	Nom.	l/s	8.6	10.1	11.5	13.2	15.0	17.2	20.0	22.6	25.3	26.9	28.6	30.5	32.4	36.6	40.7	43.6	47.9	50.0																			
		Water pressure drop	Cooling	Nom.	kPa	16.4	13.2	16.2	17.1	21.0	34.2	31.2	39.7	36.6	41.0	27.1	30.4	33.2	40.3	33.3	37.3	42.3	34.2																			
Water volume			l	26	37			50			158			255			301			485			453																			
Air heat exchanger	Type	Microchannel																																								
Compressor	Type	Inverter driven single screw compressor																																								
	Quantity		1								2																															
Fan	Type	Direct propeller																																								
	Quantity		6				8				10				12				14				16				18				20				22							
	Air flow rate	Nom.	l/s	22,664				30,219				36,920				37,774				44,475				51,745				59,299				66,570				74,124				81,394		
Speed			rpm	700																																						
Sound power level	Cooling	Nom.	dB(A)	88			89			90			91			92			94			94			95																	
Sound pressure level	Cooling	Nom.	dB(A)	68			69			70			71			73																										
Operation range	Air side	Cooling	Min.-Max.	°CDB																																						
	Water side	Cooling	Min.-Max.	°CDB																																						
Refrigerant	Type / GWP	R-134a/1,430																																								
	Circuits	Quantity		1								2																														
Refrigerant charge	Per circuit	kg	36	39	40	51	32	37	40.0	44.5	48	52.00	58.5	65	71.5																											
		TCO ₂ eq	51	56	57	73	46	53	57	64	69	74.36	83.65	92.95	102.245																											
Piping connections	Evaporator water inlet/outlet (OD)		88.9mm				114.3mm				139.7mm				168.3mm				6inch"				8mm"																			
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																																							

Cooling only				EWAD-TZPRB																																			
Cooling capacity	Nom.			190	220	240	290	300	350	420	495	550	620	720	820	950																							
Power input	Cooling	Nom.	kW	187	218	247	279	317	382	437	505	543	620	717	833	950																							
EER				50.5	60.7	68.7	83.4	95.9	105	125	139	151.3	178.5	182.2	220.2	252.4																							
ESEER				3.71	3.59			3.35	3.31	3.64	3.49	3.62	3.59	3.473	3.935	3.783	3.764																						
ESEER				5.55	5.52	5.27	5.16	5.20	5.32	5.21	5.38	5.5	5.42	5.59	5.54	5.55																							
Dimensions	Unit	Height	mm	2,483																																			
			mm	2,258																																			
			mm	4,083				4,983			5,883			6,783			8,820			9,591			10,461			11,233													
Weight	Unit	Operation weight	kg	2,858	2,869			2,870	3,120	4,935	5,269	5,277	6,620	6,648	7,735	8,028	8,357																						
			kg	2,908	2,919			2,920	3,170	5,190	5,524	5,532	6,927	6,955	8,220	8,513	8,810																						
Water heat exchanger	Type	Plate heat exchanger																																					
		Single pass shell & tube																																					
		Water flow rate	Cooling	Nom.	l/s	9.0	10.4	11.8	13.3	15.2	18.3	20.9	24.2	26	29.6	34.3	39.8	45.4																					
		Water pressure drop	Cooling	Nom.	kPa	10.6	11.0	13.4	17.1	21.5	20.4	26.4	33.2	19.8	24.9	24.2	31.7	28.9																					
Water volume			l	50				255				307				485				453																			
Air heat exchanger	Type	Microchannel																																					
Compressor	Type	Inverter driven single screw compressor																																					
	Quantity		1								2																												
Fan	Type	Direct propeller																																					
	Quantity		8				10				12				14				16				18				20				22				24				
	Air flow rate	Cooling	Nom.	l/s	29,610				37,013				43,369				50,423				57,826				64,879				72,282				79,336				86,738		
Speed			rpm	700																																			
Sound power level	Cooling	Nom.	dB(A)	87	88			87			88			89			90			94			95																
Sound pressure level	Cooling	Nom.	dB(A)	67	68			67			68			69			73																						
Operation range	Air side	Cooling	Min.-Max.	°CDB																																			
	Water side	Cooling	Min.-Max.	°CDB																																			
Refrigerant	Type	R-134a																																					
	Circuits	Quantity		1								2																											
Refrigerant charge	Per circuit	kg	49	50	51	58	38.5	43	47	52.5	57	65	71.5	78																									
		TCO ₂ eq	70	72	73	83	55	61	67	75.075	81.51	92.95	102.245	111.54																									
Power supply	Phase/Frequency/Voltage	Hz/V	3~/50/400																																				

Why choose Service & Maintenance

Daikin Applied Service offers maintenance, repairs and support on ALL brands of HVAC systems and applied system solutions; covering air handling units, chillers, split air conditioning, VRV and heat pumps.

Service capabilities

- › Flexible maintenance contracts tailored to your business needs
- › Maintenance of ALL brands of HVAC equipment
- › 24/7 emergency call out service
- › Up to four hour response time
- › Qualified site service engineers (F-Gas Registered)
- › Remote monitoring with Daikin On Site (DOS)
- › On site training for front-line personnel
- › Tailored Service Level Agreement (SLA)
- › Full chiller running logs taken on every service visit
- › Comprehensive spare parts availability & support on all brands
- › Retrofitting & refurbishment

Benefits of a maintained system

- › Lower operation costs and energy usage
- › Extended life-cycle of assets
- › Fast and reliable remote diagnostics with Daikin On Site
- › Reduced equipment downtime and costly repairs
- › Improved indoor air quality



Service Package	Business Saver	Business Standard	Business Plus
Conforms to SFG20 maintenance standard	✓	✓	✓
F-Gas leak test	✓	✓	✓
Unit controller set points, safeties and running conditions logged	✓	✓	✓
Equipment condition report	✓	✓	✓
Four visits per annum (1 major / 3 minor)	✓	✓	✓
Calibration of all sensors, probes and safety switches	✓	✓	✓
System Diagnostics	✓	✓	✓
Oil Analysis	●	●	✓
Thermography	✓	●	●
Multi-site visits & bespoke offering	●	●	●
Daikin on Site remote monitoring	●	●	●
1 point vibration analysis	●	●	●
System water analysis	●	●	●
Condenser coil cleaning	●	●	●

● Optional extras that can be tailored to your needs.


Daikin on Site

Standard on all new installations

What is Daikin on Site?

Daikin on Site (DOS) is a web-based 24/7 remote monitoring system that collects complex operational data from the AHU or chiller control system.

Daikin's Smart Centre turns the operational data into useful information that allows the user to remotely monitor performance. It also allows Daikin professionals to remotely optimise and maintain the equipment.

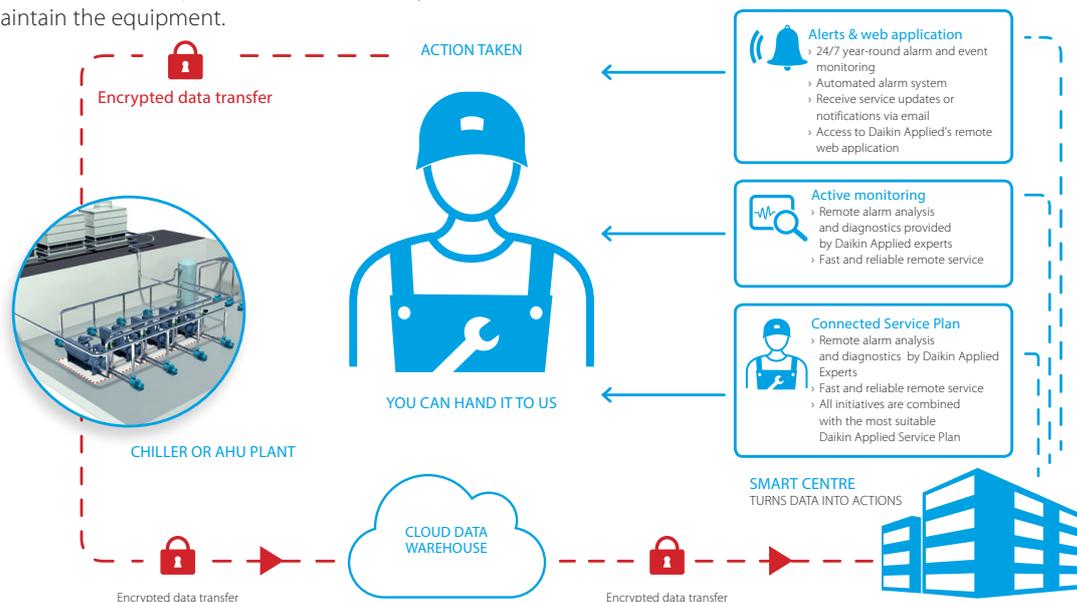

Main benefits to DOS

- › Remote diagnostic support from Daikin experts
- › Enhanced reliability and reduced system downtime
- › Optimised energy efficiency and reduced operational costs over the systems lifetime
- › Insight into operational data to optimise the use of equipment via Trend Analysis



Cloud technology to hand

Remote maintenance allows your system to be accessed using any web-compatible devices any time and anywhere using cloud technology. Process data is collected automatically in real time and stored centrally.



Simple, effective connection

Most Daikin Applied Chiller and AHU controllers have a built-in IP interface. This allows connection for remote monitoring either through LAN or with wireless modem communication.



Insight into operational data for enhanced control and reliability

Through enhanced operational data, Daikin engineers are able to remotely monitor system performance, run diagnostics and software upgrades. If an on-site visit is required, the service engineer will arrive already informed of the issue, reducing system downtime.



High security

- Secure in all aspects such as data privacy, data storage security and data transport.
- › All connections are encrypted (HTTPS) to prevent wiretapping and man-in-the-middle (MITM) attacks
 - › CSA security attestation
 - › Data privacy conforming to EU data privacy regulations
 - › Geo-redundant data storage in Northern Europe

For more information email info@daikinapplied.uk or visit www.daikinapplied.uk

For all Daikin Applied UK,
Daikin Applied Service &
Spares enquiries call us on:
0345 565 2700



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Liquid Chilling Packages and Hydronic Heat Pumps, Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. Daikin Europe N.V. has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.

