


Dual Outlet Shower Tower

Installation instructions

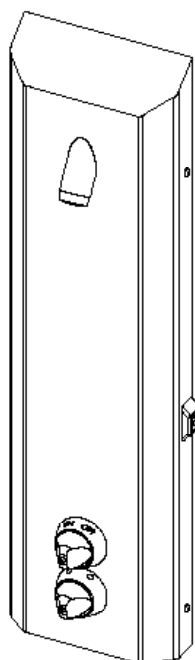

Step 1 : Safety First

Safety First

Due to the weight and the potential for sharp edges appropriate PPE including gloves and steel toed shoes should be used at all times when handling this product.



Warranty

The shower tower is guaranteed for 2 years from purchase against defective material and assembly.

Disposal of electrical and electronic equipment

The use of this crossed out wheeled bin logo indicates that this product needs to be disposed of separately to any other household waste.




Within each of the European Union member countries, provisions have been made for the collection and recycling of unwanted electrical and electronic equipment. Outside of the EU it will be necessary to dispose of this product at your local community waste collection or recycling centre.

In order to help preserve our environment we ask that you dispose of this product correctly, Please contact your local council for collection centre details.

Step 2 : Parts


Recommended additional parts:



DVS 4 in 1
Thermostatic Mixing Valve
AC17-047

Step 3 : Installation

- 1 4 in 1 Thermostatic Mixing Valve (Recommended)
- 2 Shower Head Manifold
- 3 Screw in Shower Hose Shroud
- 4 Manifold Outlet
- 5 Flow / Temp Valve

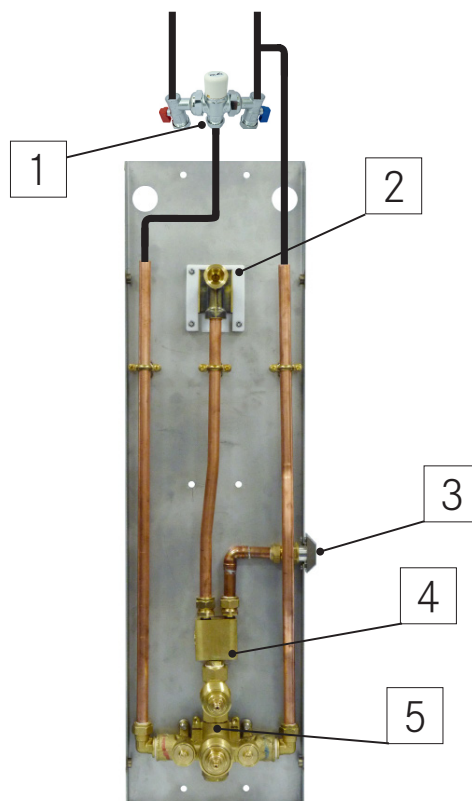

Installation

Unscrew 4 retaining screws (see fig.1) with a hex pin security driver bit.

The front of the shower is released by unscrewing fixing screws and removing shower control knobs (see fig.2).

The front panel can be separated from the back by pulling the panel straight out (see fig.3).

Mark fixing positions by holding the back panel on the wall in the position to be fixed ensuring the top of the panel locates flush to the ceiling.

Drill and prepare holes of fixing positions for fastenings suitable for the wall the shower is being attached to.

Fix back panel to wall with appropriate fixings.

Before making final connections flush pipework to remove any debris.

Make final connections of services to inlet pipework, we recommend installation of separate TMV3 Mixing Valve with this product.



Fig.1




Fig.2




Fig.3



Fig.4

Turn water services on and check for leaks tightening fittings if necessary.

Place front panel onto back panel and replace operation knobs (see fig.4).

Close front panel and secure retaining screws.

Re-fix knobs using retaining screws.

Also, please ensure that the surface to be mounted to is even, otherwise the shower body may be distorted- preventing proper alignment between the body and front cover.