

Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

# Printed Glass Fronted Radiators

Lot 20  
compliant



A 4mm toughened safety glass printed on the inside face and then glued to the radiator with a strong double-sided adhesive material creating a superb glass splashback.



© ecolec

The picture is digitally printed on the inner surface of the toughened safety glass and fixed to the radiator face using a specially developed adhesive with strong memory.

This elegant solution requires a high-resolution photograph which could be:

- Your favourite photograph
- A shutterstock image
- A company logo
- Your startup logo
- Your business message
- Your choice of Farrow and Ball Colours
- Your choice of RAL colours
- The choices are endless - call us on 01902 457575



**NO PLUMBING, NO GUARDS, NO PIPEWORK, EASY PLUG AND PLAY INSTALLATION.**


SEND  
IMAGE



WE PRINT  
YOUR  
IMAGE

METAL  
CASING


ADHESIVE

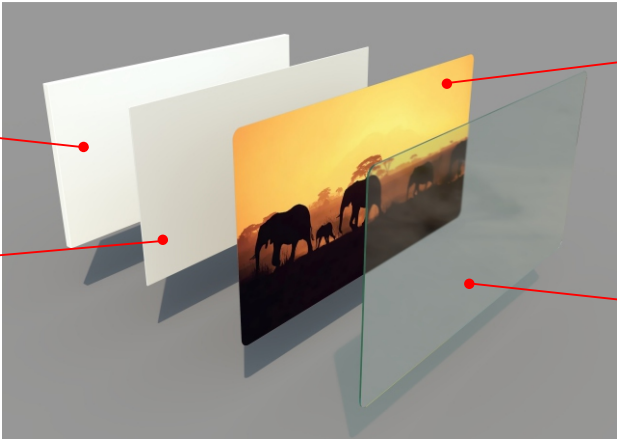

PRINTED  
IMAGE

TOUGHENED  
SAFETY GLASS


TOP  
VIEW

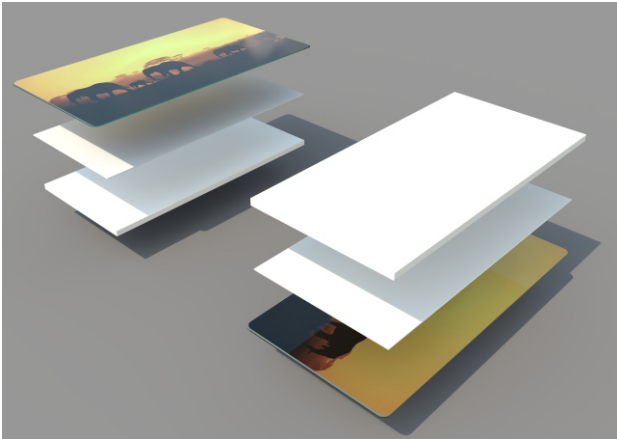

BOTTOM  
VIEW

METAL  
CASING

ADHESIVE

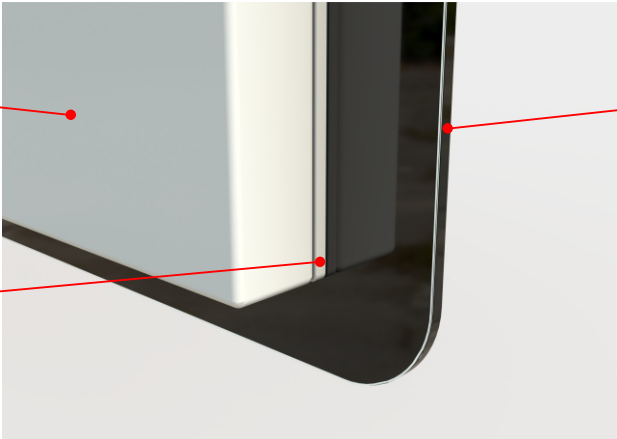

TOUGHENED  
SAFETY GLASS



Uniclass L7522	EPIC L22
CI/SfB (56.84)	X




BY



## COLOURED GLASS AND MIRROR RADIATORS





© ecolec



**NO PLUMBING, NO GUARDS, NO PIPEWORK, EASY PLUG AND PLAY INSTALLATION.**





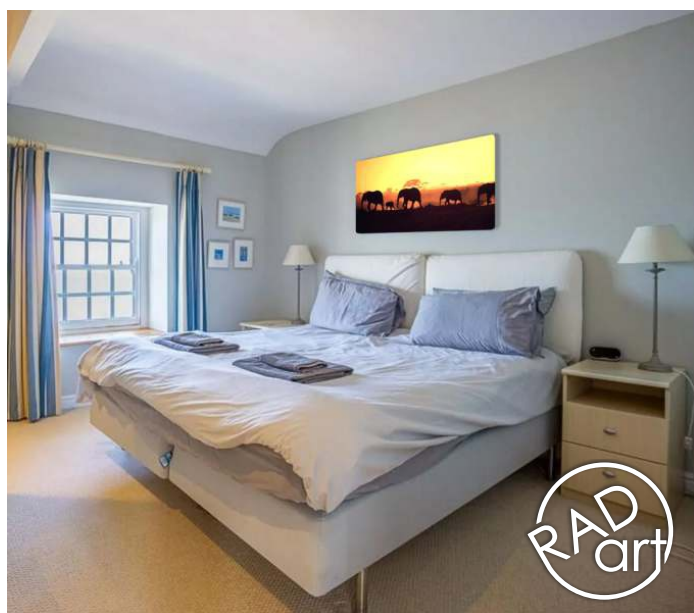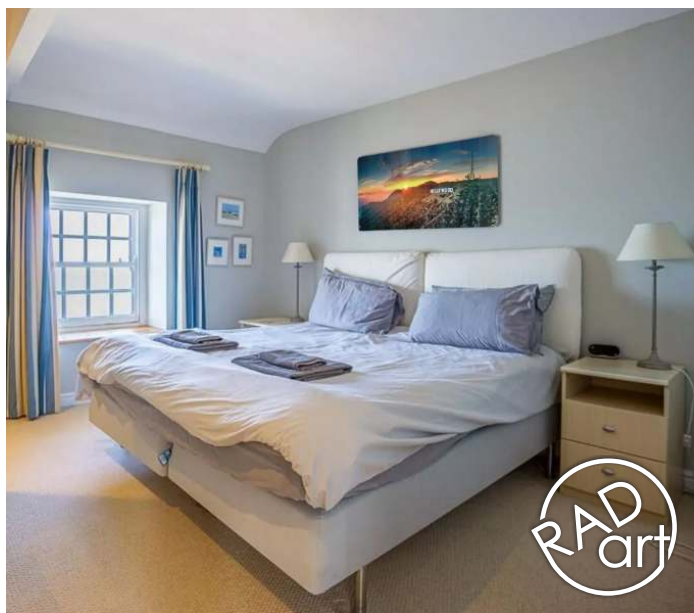



Uniclass L7522	EPIC L22
CI/SfB (56.84)	X

# Printed Glass Art Fronted Splashbacks




SEND  
IMAGE



WE PRINT  
YOUR  
IMAGE

METAL  
PLATE

ADHESIVE

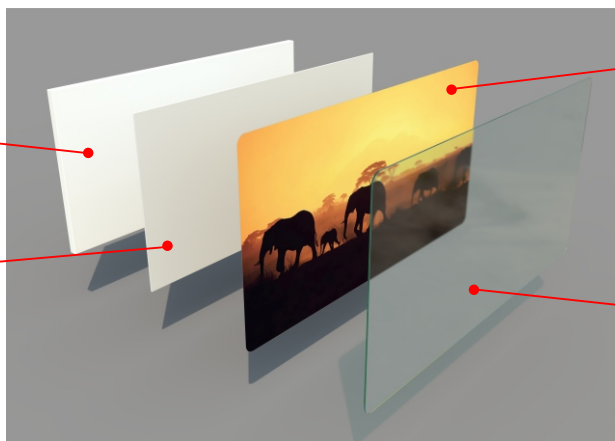


PRINTED  
IMAGE

TOUGHENED  
SAFETY GLASS

METAL  
PLATE

ADHESIVE

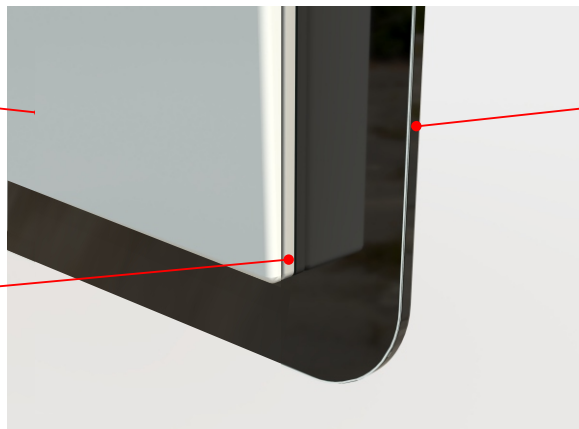

TOUGHENED  
SAFETY GLASS


The good way to manage your electric running costs is to add a timer like the WCT500/TX which has a unique feature that can modulate the surface temperature of the radiator to suit you !

## NEW FEATURES!

### SURFACE TEMPERATURE SETTING:



WCT 500/TX/70

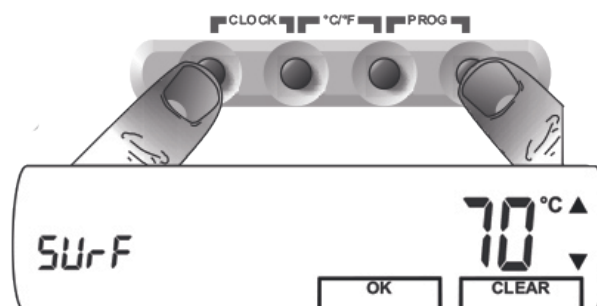


Press the two buttons as shown until current surface temperature is display. Then adjust to required temperature using the arrow buttons.


### WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries


The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.

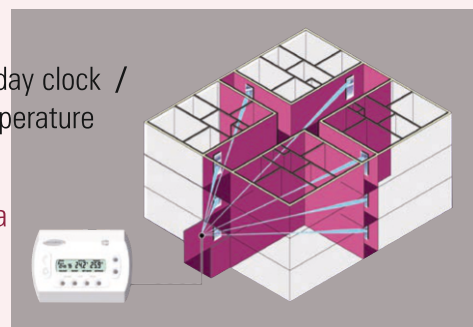

### TEMPERATURE RANGE: STANDARD 70°C

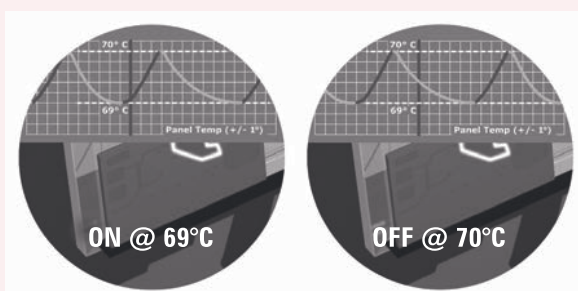

### MK1 230V Mains Kit

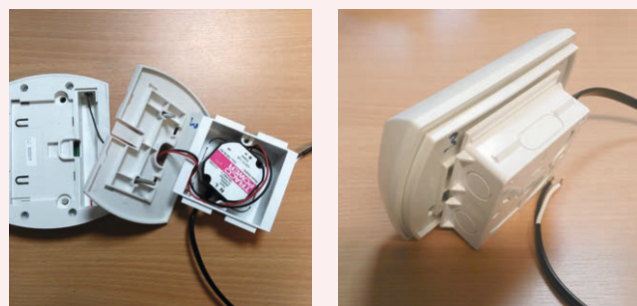

**SPECIFICATION:**

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)
2.1	ECO 750D/IP44/PIX/RX	750 x 500 mm x 44	750
	Glass with curved corners measuring 790 x 540 mm		
2.2	ECO 1000D/IP44/PIX/RX	1000 x 500 mm x 44	1000
	Glass with curved corners measuring 1040 x 540 mm		
2.3	ECO 1500D/IP44/PIX/RX	1500 x 500 mm x 44	1500
	Glass with curved corners measuring 1540 x 540 mm		

**SPECIFICATION:**

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)
3.1	ECO 750D/IP44/MIR/RX	750 x 500 mm x 44	750
	Glass with curved corners measuring 790 x 540 mm		
3.2	ECO 1000D/IP44/MIR/RX	1000 x 500 mm x 44	1000
	Glass with curved corners measuring 1040 x 540 mm		
3.3	ECO 1500D/IP44/MIR/RX	1500 x 500 mm x 44	1500
	Glass with curved corners measuring 1540 x 540 mm		

**SPECIFICATION:**

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)
4.1	ECO 750D/IP44/COL/RX	750 x 500 mm x 44	750
	Glass with curved corners measuring 790 x 540 mm		
4.2	ECO 1000D/IP44/COL/RX	1000 x 500 mm x 44	1000
	Glass with curved corners measuring 1040 x 540 mm		
4.3	ECO 1500D/IP44/COL/RX	1500 x 500 mm x 44	1500
	Glass with curved corners measuring 1540 x 540 mm		



These can be mounted vertically or horizontally

**RAL COLOUR OPTIONS**

	RAL 9010 PURE WHITE		RAL 6019 PASTEL GREEN		RAL 7047 TELE GREY 4
	RAL 9001 CREAM		RAL 6034 PASTEL TURQUOISE		RAL 9006 WHITE ALUMINIUM
	RAL 1015 LIGHT IVORY		RAL 5015 SKY BLUE		RAL 7024 GRAPHITE GREY
	RAL 1014 IVORY		RAL 5002 ULTRAMARINE BLUE		RAL 7016 ANTHRACITE GREY
	RAL 7032 PEBBLE GREY		RAL 5008 GREY BLUE		RAL 9005 BLACK

**NO PLUMBING, NO GUARDS, NO PIPEWORK, EASY PLUG AND PLAY INSTALLATION.**

Sharrocks Street, Wolverhampton WV1 3RP

Tel. 01902 457575 E-mail: [info@ecolec.co.uk](mailto:info@ecolec.co.uk) Website: [www.ecolec.co.uk](http://www.ecolec.co.uk)



**PROUDLY MANUFACTURED IN THE UK**



Hereby, Ecolec Limited, declares that the radio equipment type thermostat and gateway are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: [www.ecolec.co.uk/support](http://www.ecolec.co.uk/support)

© Ecolec © Ecolec 1995-2024.  
All rights reserved Ecolec is a registered trademark of Ecolec Limited All specifications subject to change without notice.



**Proudly  
Manufactured  
in the UK.**

**E & O.E.**