

Available from electric wholesalers and NICEIC engineers



SPACE SAVING VERTICAL IP44 BATHROOM PANEL WITH OPTIONAL TOWEL RAIL

with Wireless Time and Temperature Control









Better control saves energy, saves money

Department of Energy & Climate change suggest (2013) that a domestic energy bill is made up of 17% to hot water and 66% to domestic heating Managing and controlling your heating **"Where you want it, when you want it"** is the key to saving money.

RADIATOR KEY FEATURES:

Simply wire the heater to a fused spur / Cable Length 2m / Cable exit on the rear - hidden wiring / Fitting Kit Supplied / No need to to manually switch heaters "On" or "Off" when using controller.

WIRELESS CONTROLLER (TRANSMITTER) KEY FEATURES:

Keylock mode / Simple to Programme / Up to 6 temperature settings per day / 7 day clock / Advance mode / Economy mode / Holiday mode / Boost Mode / Inbuilt room temperature sensor / Frost protection / Powered by 2 x 1.5v Alkaline batteries

The TX control unit sends a 433MHz radio signal to each "registered" heater within a radius of 30 metres. Each RX panel heater has an inbuilt receiver designed to respond to a signal from the WCT 100/RX.



SURE!

COLOUR OPTIONS



To help preserve the environment, and as part of its sustainability policy, Ecolec offer a **Do Not Scrap** return-to-base full refit and refurbishment service.

A simple 3 point plan!

- Measure Room Sizes
- Calculate Heat Loss
- Select Radiator

All local space heaters manufactured for sale in the EU after 1st January 2018 which use electricity, gaseous or liquid fuels, must comply with a minimum efficiency standard. This includes electric radiators, electric underfloor heating and electric and gas fires.



SPECIFICATION:

LINE REF	CODE	DIMENSIONS (H X W X D) MM	ELEMENT (WATTS)		
	Powder Coated White				
7.2	ECO 1500D/IP44/PC/RX	1500 x 500 x 40	1500		
7.3	ECO 1000D/IP44/PC/RX	1000 x 500 x 40	1000		
7.4	ECO 500D/IP44/PC/RX	500 x 500 x 40	500		
7.6	ECO 546/IP44/PC/RX	600 x 400 x 40	500		
7.10	ECO 750D/IP44/PC/RX	750 x 500 x 40	750		
3.9	Selected Powder Coated RAL COLOURS available for additional charge to Line Ref. 1.1 to 1.8				
	Accessories				
8.1	Aluminium PC Silver Towel Rail - RAL 9006	500 x2		NEW	
8.2	Aluminium PC Silver Towel Rail - RAL 9006	500 x1		NEW	





Battery Kit wcT100, wcT500

CONTROLLERS


MK1 230V Mains Kit

NEW FEATURES!

SURFACE TEMPERATURE SETTING:



WCT 500/TX/70



Press the two buttons as shown until current surface temperature is display. Then adjust to required temperature using the arrow buttons.





Sharrocks Street, Wolverhampton WV1 3RP

Tel: 01902 457575 Email: sales@ecolec.co.uk Website: www.ecolec.co.uk





Uniclass L7522			EPIC L22
CI/SfB (<u>t</u>	56.84)	Χ	

Available from electric wholesalers and NICEIC engineers



Wireless Heating Systems

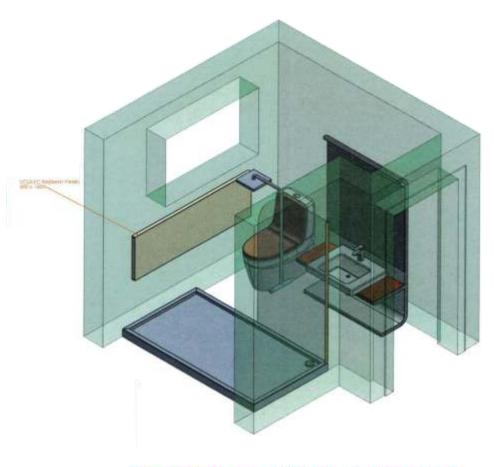



ECOLEC RADIANT PANEL HEATER DEPICTED ON SATHROOM WALL SATHROOM NOM. BATHROOM SIZE 2000 x 1700 ECOLEC PANEL SIZE 500 x 1500

