




RECYFIX®MONOTEC 100



RECYFIX®MONOTEC 100, up to class D 400, Type 230, 1.0 m

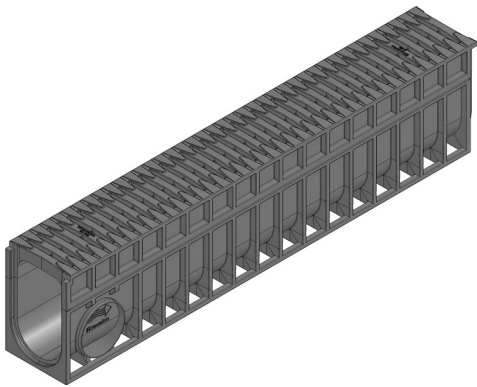

D 400

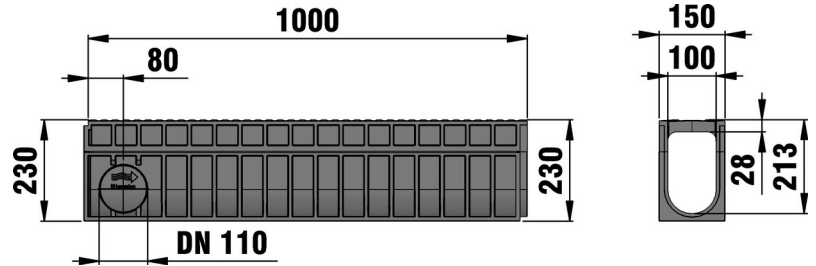

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Item-no.
1000	150	230	8.21	372.0	190.0	36000

■ Product description:

RECYFIX MONOTEC 100 type 230 - Monolithic channel consists of channel body and permanently integrated grating in FIBRETEC design SW 110/9 mm, made of recycled polypropylene, black, with lateral connection possibility DN/OD 110, load class A 15 - D 400 according to EN 1433, LxWxH 1000x150x230 mm, item no. 36000

■ Material:

- **Material:** reinforced Polypropylene

■ Application areas:

- Architecture and Design
- Public places
- Communal facilities
- Parking lots
- Parks and gardens
- Car washes

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!

