




RECYFIX®MONOTEC 200



RECYFIX®MONOTEC 200, up to class D 400, Type 450, 1.0 m

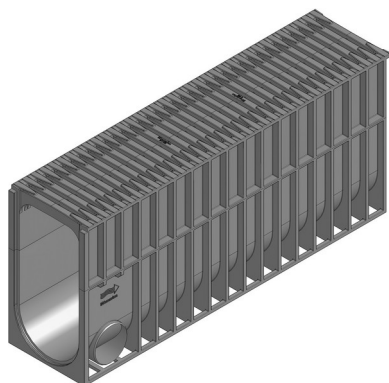

D 400

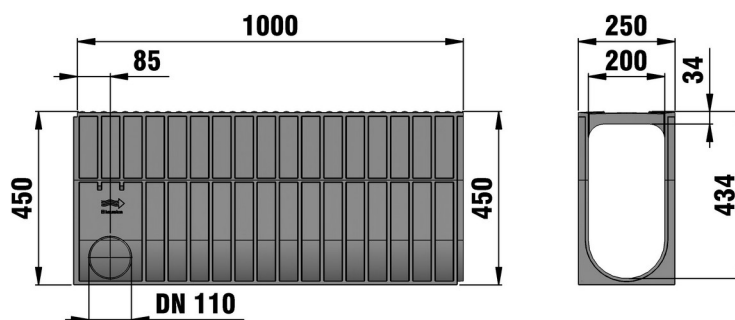

■ Technical data:

Length mm	Width mm	Height mm	Weight kg	Inlet cross-section cm ² /m	Internal channel cross-sect. cm ²	Item-no.
1000	250	450	16.31	656.0	746.0	36215

■ Product description:

RECYFIX MONOTEC 200 type 450 - Monolithic channel consists of channel body and permanently integrated grating in FIBRETEC design SW 200/10 mm, made of fibre-reinforced recycled polypropylene, black, with lateral connection possibility DN/OD 110, load class A 15 -D 400 according to EN 1433, LxWxH 1000x250x450 mm, item no. 36215

■ Material:

- **Material:** reinforced Polypropylene

■ Application areas:

- Architecture and Design
- Public places
- Communal facilities
- Parking lots
- Parks and gardens
- Car washes

The optimal use of the product in the aforementioned applications depends on various factors (positioning, traffic load and frequency,...). Our experts will be happy to advise you!

