




www.bohle-group.com

Bohle FrameTec
Frame Systems

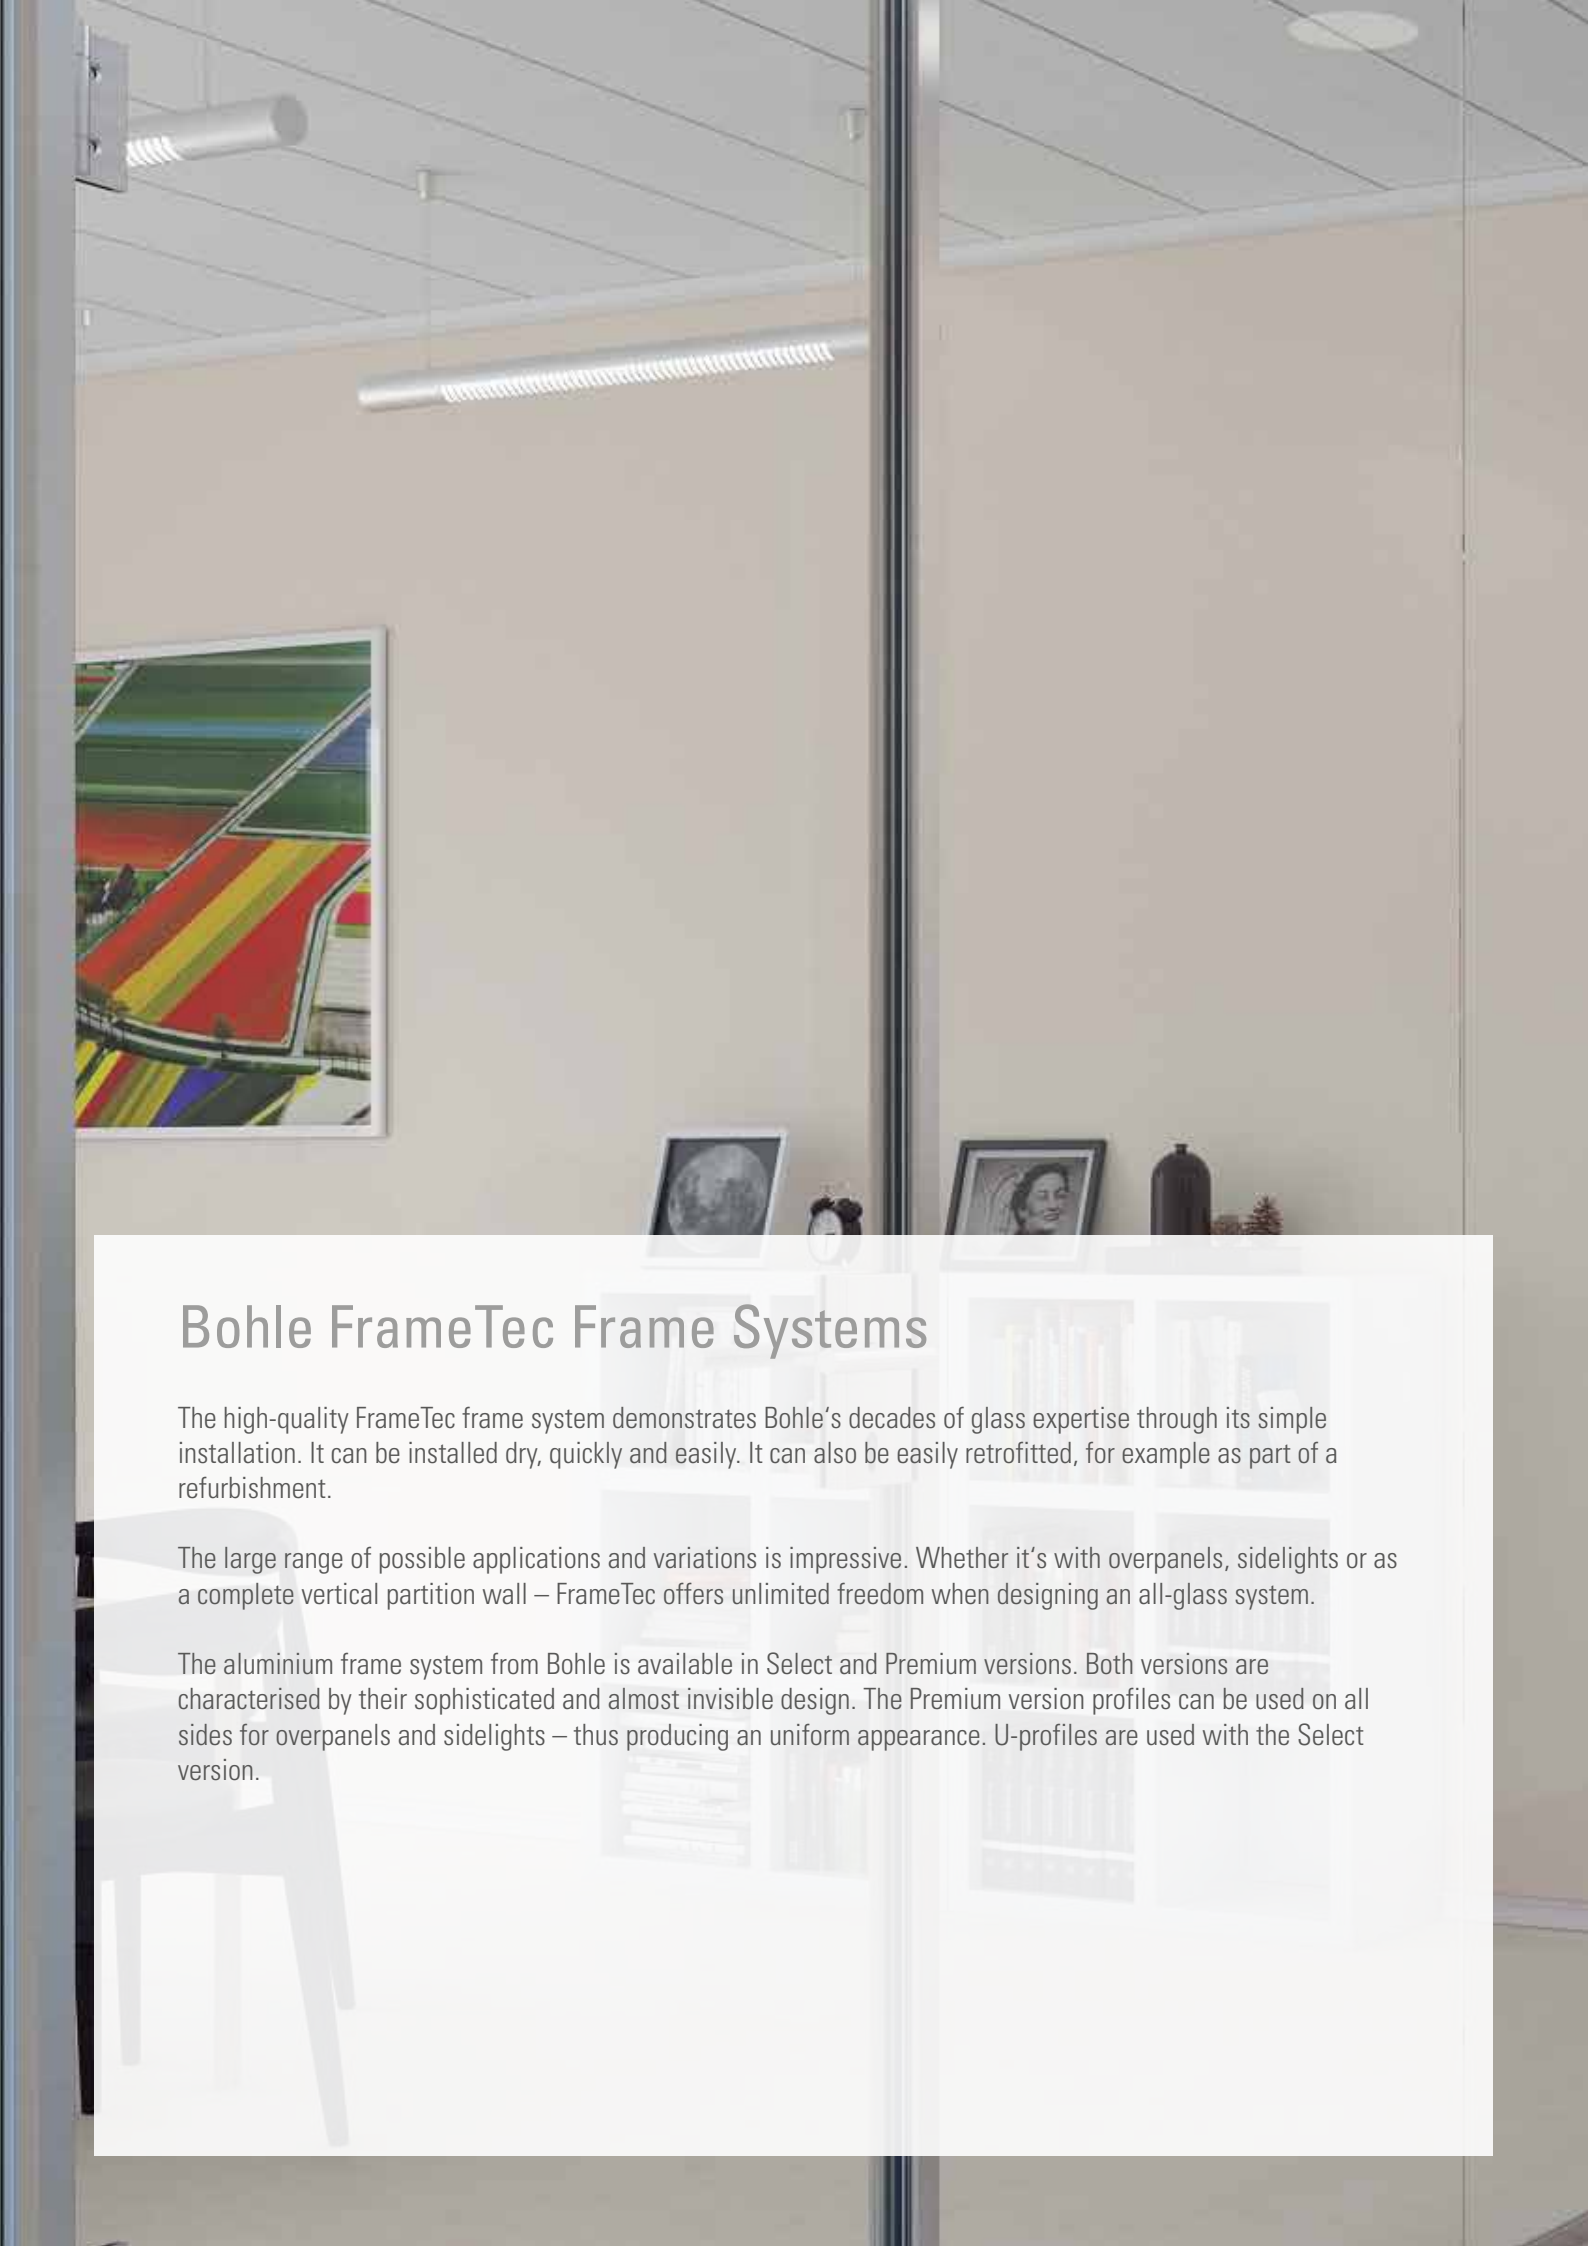

Bohle FrameTec Frame Systems

The high-quality FrameTec frame system demonstrates Bohle's decades of glass expertise through its simple installation. It can be installed dry, quickly and easily. It can also be easily retrofitted, for example as part of a refurbishment.

The large range of possible applications and variations is impressive. Whether it's with overpanels, sidelights or as a complete vertical partition wall – FrameTec offers unlimited freedom when designing an all-glass system.

The aluminium frame system from Bohle is available in Select and Premium versions. Both versions are characterised by their sophisticated and almost invisible design. The Premium version profiles can be used on all sides for overpanels and sidelights – thus producing an uniform appearance. U-profiles are used with the Select version.



System Comparison

Bohle FrameTec frame systems	Select	Premium
Glass type on door	Tempered/laminated safety glass* 8 - 10.76mm	
Glass type on sidelight/overpanel	Tempered/laminated 8 - 12.76 mm	Tempered/laminated 4 - 10.76 mm
Finish	Anodised aluminium E6 / EV1	
Special colours on request	RAL colours, E4 / C31 stainless steel look	
Temperature resistance	70°	200°
Profile requires no milling	✓	
Easy installation	✓	
Plug-in gaskets	✓	
Pre-assembled sets	✓	
Lateral clip-on profile	✓	
Lengths of 6000 mm available on request	✓	
Sound insulation testing		✓
Fixed glazing	with U-profiles	with frame profile

*Laminated safety glass from 2 x tempered glass



FrameTec Select

Product benefits:

- ✓ Easy installation
- ✓ Profile requires no milling
- ✓ Quick and easy insertion of the hinges into the multifunction channel
- ✓ Fixed cover for the narrow multifunction channel with clip-on profile
- ✓ Dry glazing with plug-in gaskets
- ✓ Pre-assembled sets – can be cut individually to size
- ✓ Lengths of 6000 mm available on request
- ✓ Pre-cut mitres
- ✓ Suitable for DIN-L and DIN-R

Technical specifications:

Application	Indoors
Material	Aluminium
Finish	Anodised E6/EV1 (stainless steel look and RAL colours available on request)
Glass type on door	Tempered glass: 8 - 10 mm Laminated safety glass: 8.76 - 10.76 mm
Glass type on sidelight/overpanel	Tempered glass: 8 - 12 mm Laminated safety glass: 8.76 - 12.76 mm
Door weight	Based on the load capacity of the hinges
Versions	Glass-wall, glass-glass
Lengths from stock	6,000 mm on request
Profile dimensions	45 x 45 mm
Fixed glazing	With matching U-profiles





Select complete frame




The aluminium frame for mounting all conventional all-glass doors with or without fixed sidelights and overpanel glazing. The hinges and strike plate can be inserted quickly and easily into the multifunction channel. The narrow channel is tightly covered with the clip-on profile. · Can be cut individually to size · Set pre-assembled for door glass thicknesses of 8-10.76 mm, sidelight/overpanel thicknesses of 10-12.76 mm (for different glass thicknesses please order gaskets separately)

Note: Please order matching door hinges separately, e.g. BO 5206664 · for fixed glass enclosures use U-profiles

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated safety glass door (from 2x tempered glass) 8 - 10.76 mm · Glass thickness of tempered/laminated safety glass sidelight/overpanel 10 - 12.76 mm · 1-door version · Gaskets black

Included in delivery:

Frame Profile
Cover profile
Rebate gasket
Base gasket
Glazing gasket for 8 + 10 mm
2x Corner Clamp bottom
4x Corner Clamp top
1x Strike Plate short
1x Strike Plate long
6x Hammerhead nuts and bolts for hinge mounting and strike plate
2x Mounting plate for door hinge



Art. No.	Type · Outer frame dimensions
BO 5220719	FTS1 · 1040 x 2400 mm
BO 5220702	FTS2 · 1040 x 3000 mm






U-Profile



U-profile for fixed glazing · Supplied without gasket

i Material Aluminium · Finish anodised E6/EV1 · Length 6000 mm · Dimensions 35 x 25 mm

Art. No.
BO 5220713





Two-piece Clamp-on Profile




Clamp-on profile for fixed glazing · Supplied without gasket



i Material Aluminium · Finish anodised E6/EV1 · Length 6000 mm · Dimensions 25 x 25 mm

Art. No.

BO 5220714



U-Profile




U-profile for fixed glazing · Supplied without gasket



i Material Aluminium · Finish anodised E6/EV1 · Length 6000 mm · Dimensions 25 x 25 mm

Art. No.

BO 5220712



End cap set for U-profiles FrameTec Select

We recommend fixing the end caps with standard silicone or double-sided adhesive tape.



i Colour black · Material plastic · Sales unit 10 items

Art. No.

BO 5220720



Sealing Set



Plug-in gasket · Suitable for profiles BO 5220714, 5220712, 5220713

i Length 6 m

Included in delivery:

6 m Glazing gasket

6 m Base gasket


Art. No. For glass thickness

BO 5220716 8-8.76 mm

BO 5220717 10-10.76 mm


BO 5220718 12-12.76 mm

Deduction Dimensions with Sidelight/Overpanel

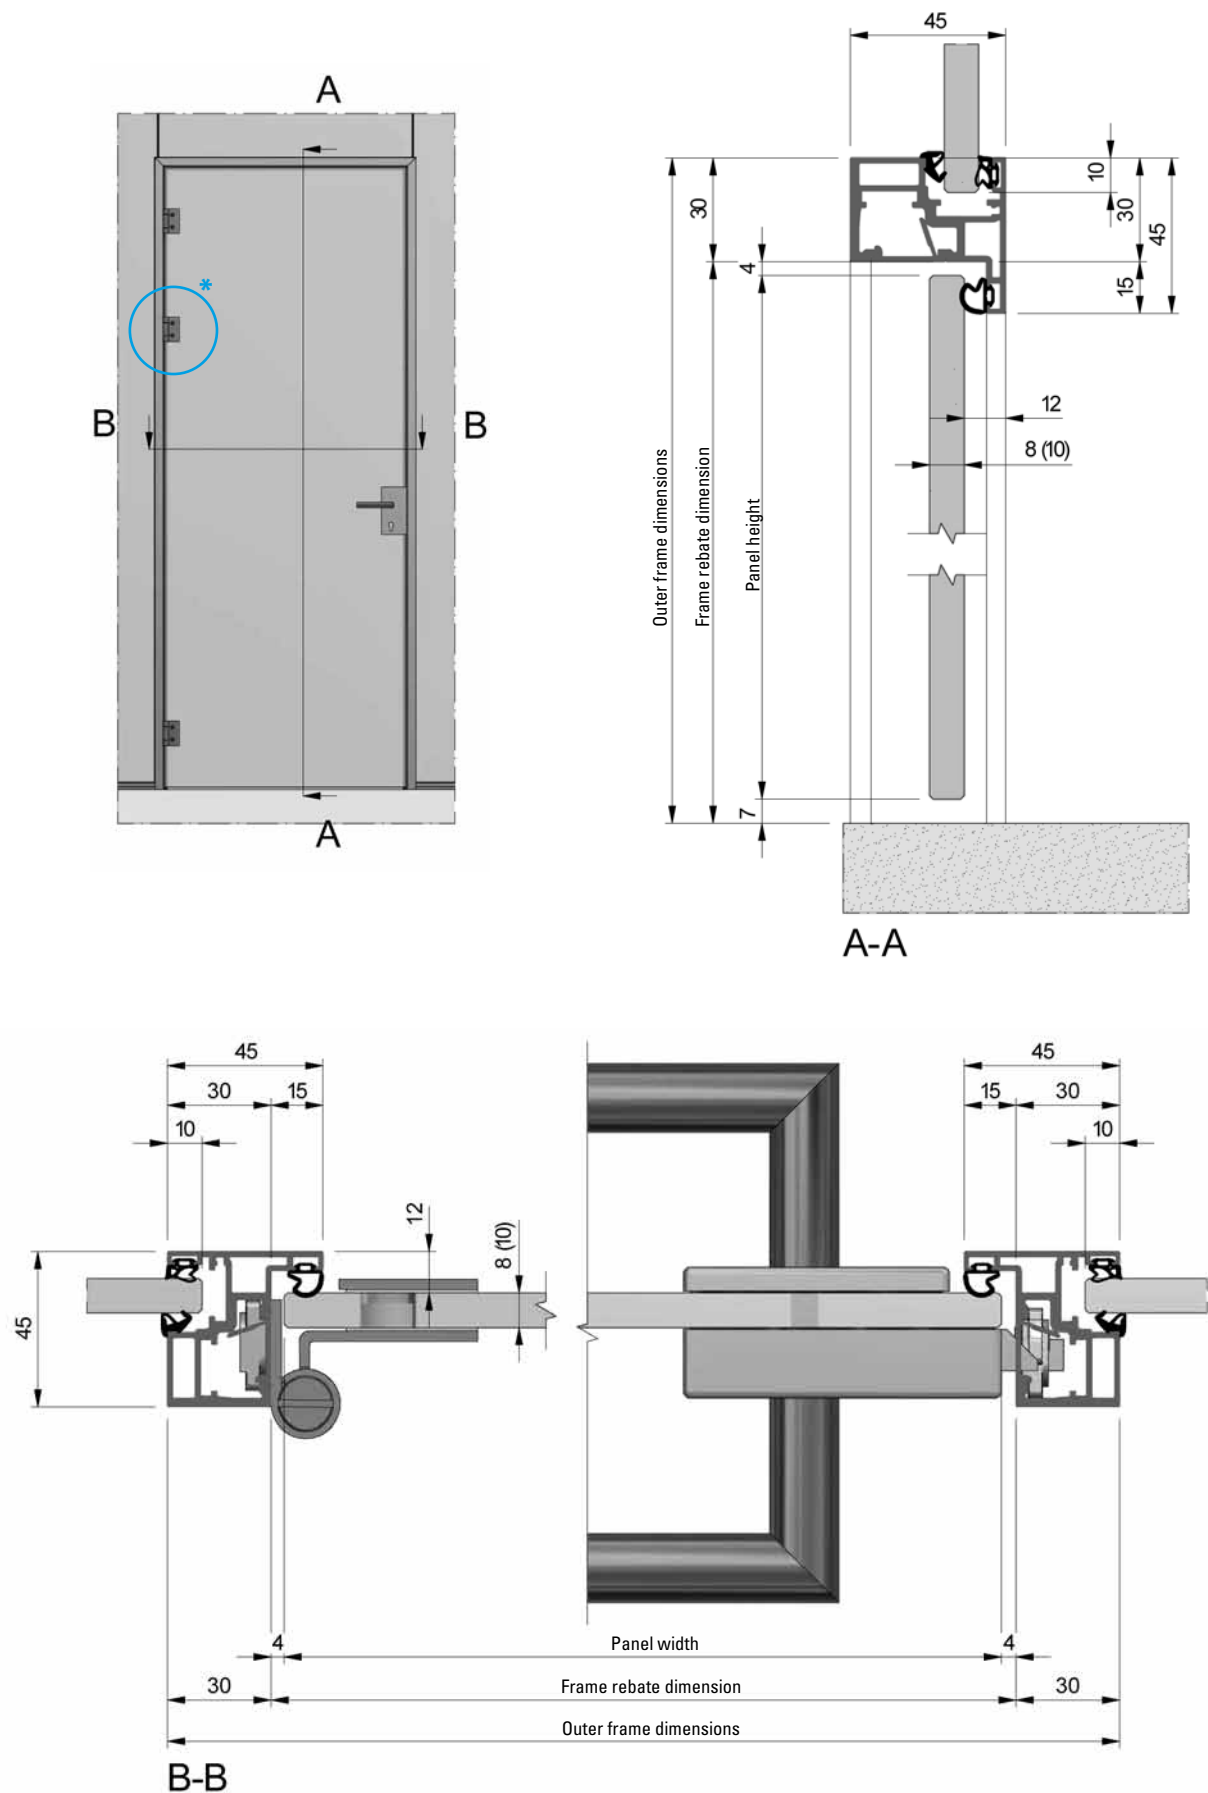

* Recommendation for a glass door height > 2200 mm 3 hinges

Deduction Dimensions with Sidelight


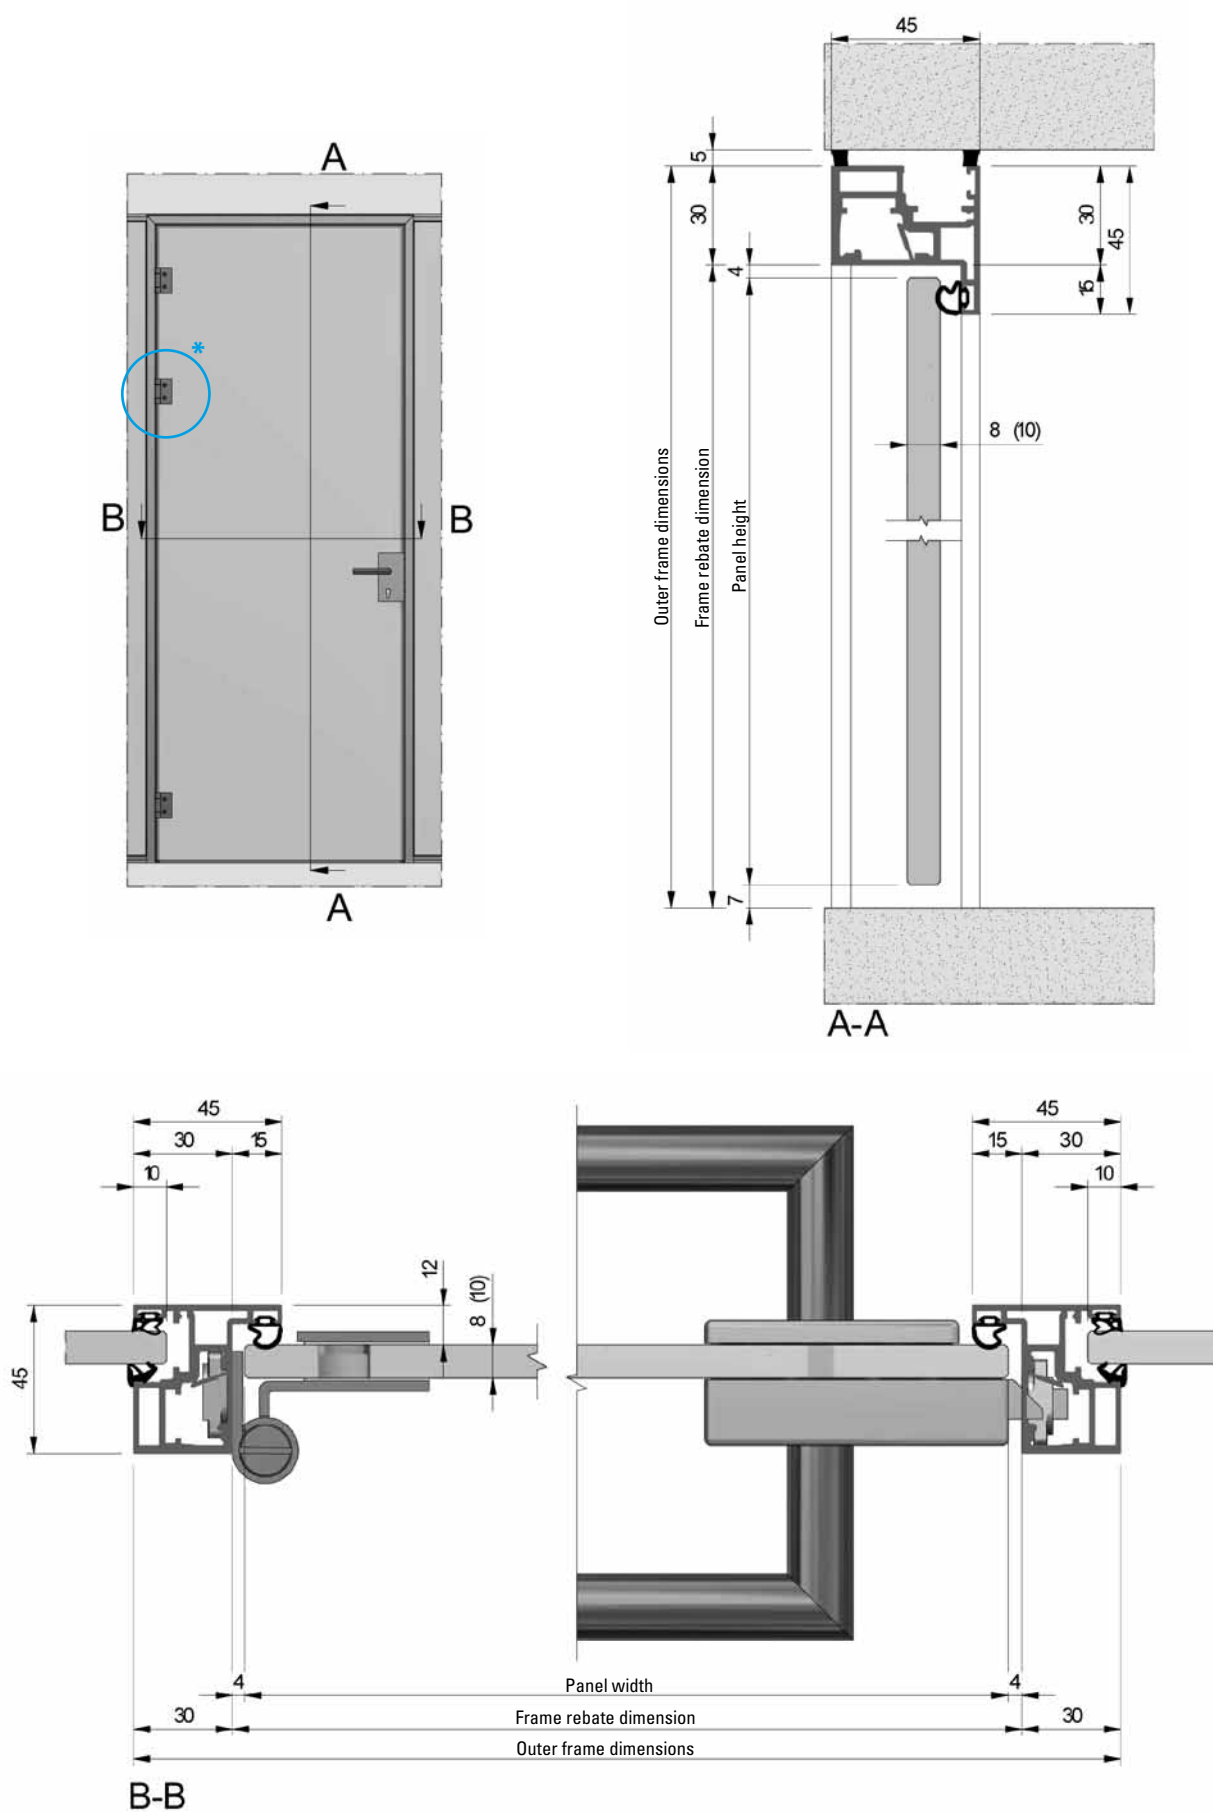


* Recommendation for a glass door height > 2200 mm 3 hinges

Glass processing



Standard glass door with frame

The image shows a glass door using standard frames in compliance with DIN 18101

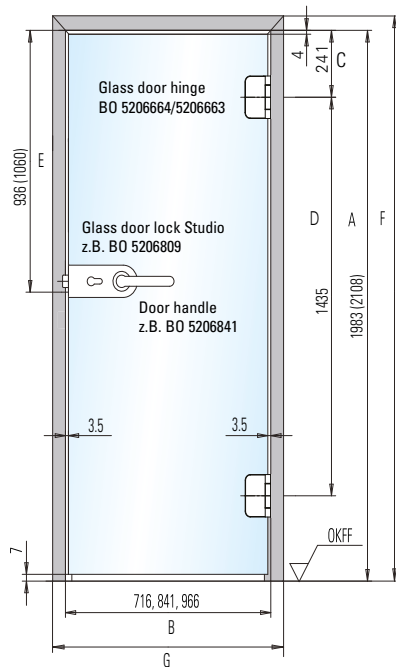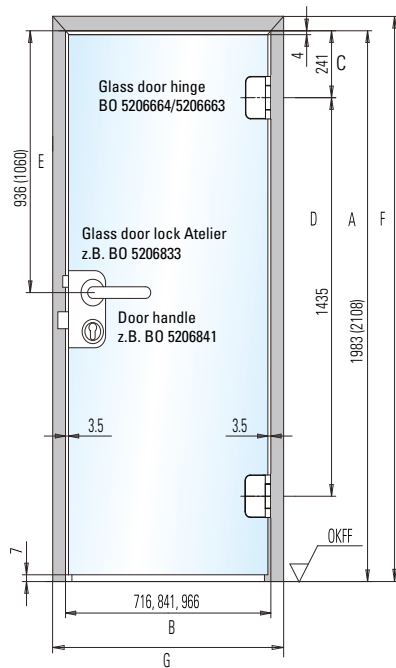

Standard glass door with frame

The image shows the glass processing for a standard door

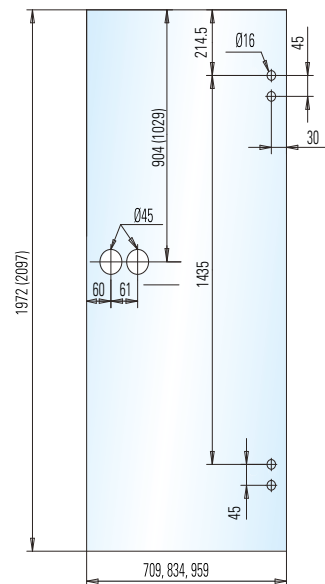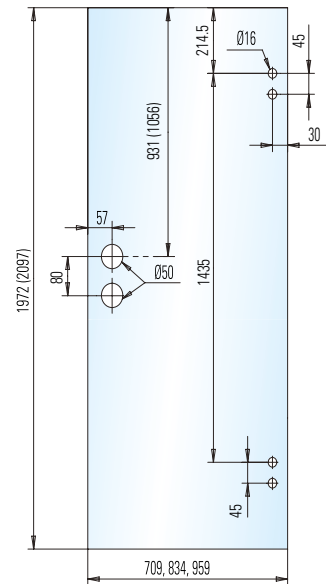

Explanations:

- A Frame rebate dimension / height
- B Frame rebate dimension / width
- C Hinge reference dimensions per DIN 18268
- D Hinge distance dimensions per DIN 18111
- E Centre door latch to frame rebate
- F Frame height
- G Frame width

FrameTec Premium

Product benefits:




- ✓ Easy installation
- ✓ Profile requires no milling
- ✓ Quick and easy insertion of the hinges into the multifunction channel
- ✓ Fixed cover for the narrow multifunction channel with clip-on profile
- ✓ Dry glazing with plug-in gaskets
- ✓ Pre-assembled sets – can be cut individually to size
- ✓ Lengths of 6000 mm available on request
- ✓ Sound insulation tested in accordance with DIN 10140
- ✓ Sidelights can be produced with a static profile up to 4 metres
- ✓ Uniform appearance – profiles can be used on all sides
- ✓ Pre-cut mitres
- ✓ Standard glass door
- ✓ Suitable for DIN-L and DIN-R

INSTALLATION
VIDEO



Technical specifications:

Application	Indoors
Material	Aluminium
Finish	Anodised E6/EV1 (stainless steel look and RAL colours available on request)
Glass type on door	Tempered glass: 8 - 10 mm Laminated safety glass: 8.76 - 10.76 mm
Glass type on sidelight/overpanel	Tempered glass: 4 - 10 mm Laminated safety glass: 4.76 - 10.76 mm
Door weight	Based on the load capacity of the hinges
Versions	Glass-wall, glass-glass
Lengths from stock	6,000 mm on request
Sound insulation	Class 1 (up to 33 dB)
T-profile dimensions	36.5 x 67 mm
L-profile dimensions	36.5 x 52 mm
Fixed glazing	With matching profiles included in the set





Premium complete frame, type FTP1 1040 x 2200 mm



Can be cut to the desired length · Set pre-assembled for door glass thicknesses of 8-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated safety glass door (from 2x tempered glass) 8 - 10.76 mm · Outer frame dimensions width x height 1040 x 2200 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:


L-profile
Cover profile
Rebate gasket
2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screw M5 x 14 mm

Art. No.

BO 5220706



Premium complete frame, type FTP2 1300 x 2600 mm



Can be cut to the desired length · Set pre-assembled for door glass thicknesses of 8-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated safety glass door (from 2x tempered glass) 8 - 10.76 mm · Outer frame dimensions width x height 1300 x 2600 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:


L-profile
Cover profile
Rebate gasket
2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screw M5 x 14 mm

Art. No.

BO 5220707



Premium complete frame, type FTP3 1040 x 3000 mm



Can be cut to the desired length · Set pre-assembled for door glass thicknesses of 8-10.76 mm, overpanel thicknesses of 4-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated glass door (from 2x tempered glass) 8 - 10.76 mm · Glass thickness of tempered/laminated glass overpanel (from 2x tempered glass) 4 - 10.76 mm · Outer frame dimensions width x height 1040 x 3000 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:

L-profile
T-profile
Glazing beads
Cover profile
Rebate gasket
internal glazing gasket 3 - 4 mm, 5 - 6 mm, 7 mm
outer glazing gasket 4 mm

2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screw M5 x 14 mm
4x Flat Head Screw M5 x 55 mm

Art. No.

BO 5220708



Premium complete frame, type FTP4 2000 x 2200 mm



Can be cut to the desired length · Set pre-assembled for door thicknesses of 8-10.76 mm, sidelight thicknesses of 4-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated glass door (from 2x tempered glass) 8 - 10.76 mm · Glass thickness of tempered/laminated glass sidelight (from 2x tempered glass) 4 - 10.76 mm · Outer frame dimensions width x height 2000 x 2200 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:


L-profile
T-profile
Glazing beads
Cover profile
Rebate gasket
internal glazing gasket 3 - 4 mm, 5 - 6 mm, 7 mm
outer glazing gasket 4 mm
2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screw M5 x 14 mm
4x Flat Head Screw M5 x 55 mm

Art. No.

BO 5220709



Premium complete frame, type FTP5 2000 x 3000 mm



Can be cut to the desired length · Set pre-assembled for door thicknesses of 8-10.76 mm, sidelight thicknesses of 4-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated safety glass door (from 2x tempered glass) 8 - 10.76 mm · Glass thickness of tempered/laminated safety glass sidelight/overpanel (from 2x tempered glass) 4 - 10.76 mm · Outer frame dimensions width x height 2000 x 3000 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:

L-profile
T-profile
Glazing beads
Clip-on cover profile
Rebate gasket
internal glazing gasket 3 - 4 mm, 5 - 6 mm, 7 mm
outer glazing gasket 4 mm
2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screw M5 x 14 mm
10x Flat Head Screw M5 x 55 mm

Art. No.

BO 5220710



Premium complete frame, type FTP6 2000 x 3000mm



Can be cut to the desired length · Set pre-assembled for door glass thicknesses of 8-10.76 mm, sidelight/overpanel thicknesses of 4-10.76 mm

Note: Please order matching door hinges separately, e.g. BO 5206664

i Material Aluminium · Finish anodised E6/EV1 · Glass thickness of tempered/laminated safety glass door (from 2x tempered glass) 8 - 10.76 mm · Glass thickness of tempered/laminated safety glass sidelight/overpanel (from 2x tempered glass) 4 - 10.76 mm · Outer frame dimensions width x height 2000 x 3000 mm · 1-door version · DIN-left / right · Gaskets grey

Included in delivery:

L-profile
T-profile
Glazing beads
Cover profile
Rebate gasket
internal glazing gasket 3 - 4 mm, 5 - 6 mm, 7 mm
outer glazing gasket 4 mm
2x Corner Clamp top
2x Mounting plate for door hinge
12x Flat Head Screws M5 x 14 mm
12x Flat Head Screws M5 x 55 mm
4x Cross connectors
4x Flat Head Screws 3,5 x 19 mm
4x Socket head screws M6 x 45 mm




Art. No.

BO 5220711




Note:

Special sizes available on request. We will gladly assist you with the planning.


Deduction Dimensions for Types FTP1 / FTP2

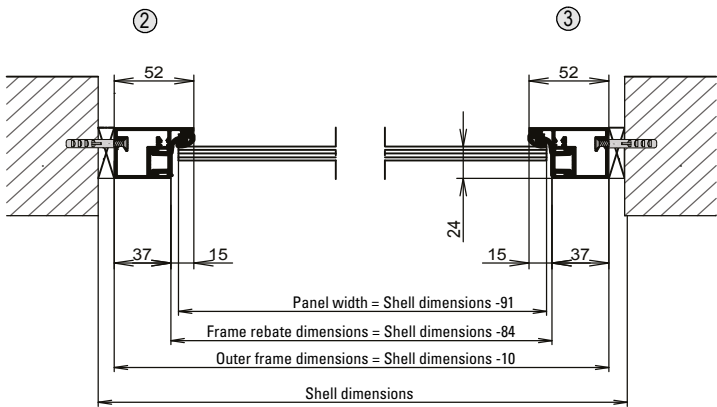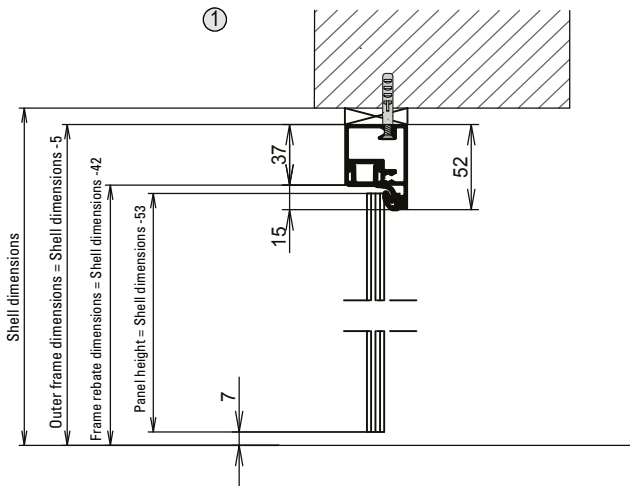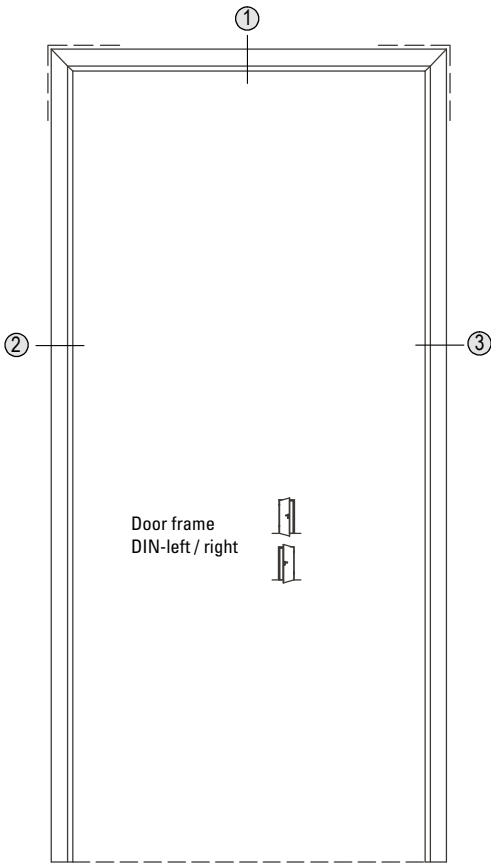


Deduction Dimensions for Type FTP3

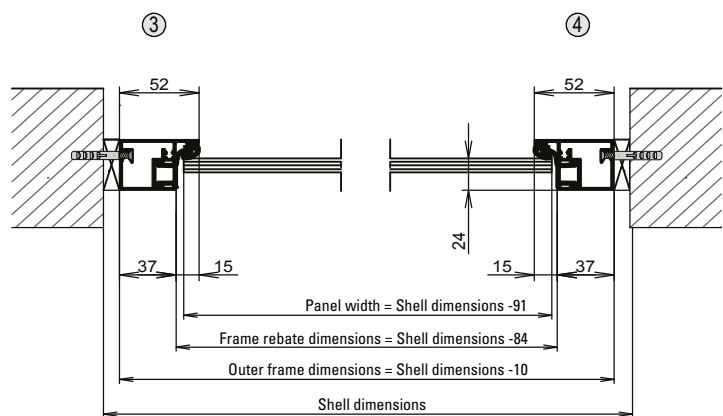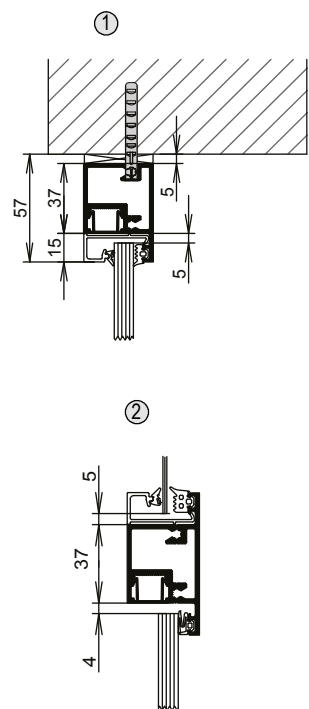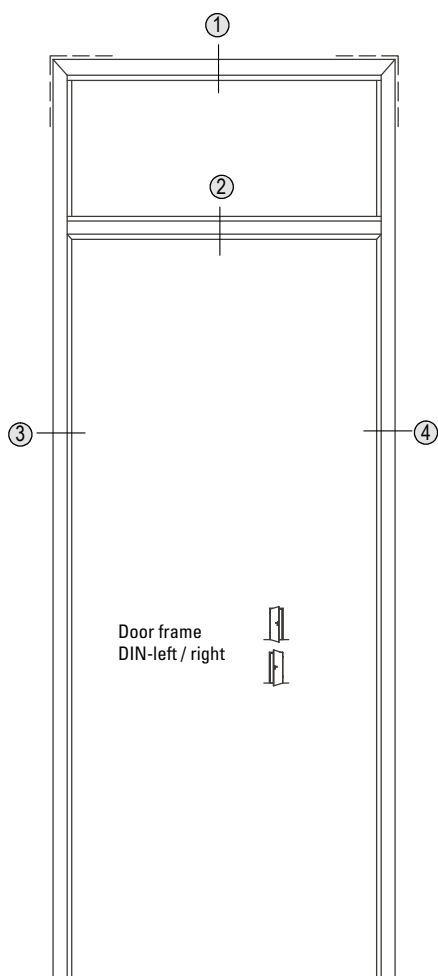


Deduction Dimensions for Type FTP4

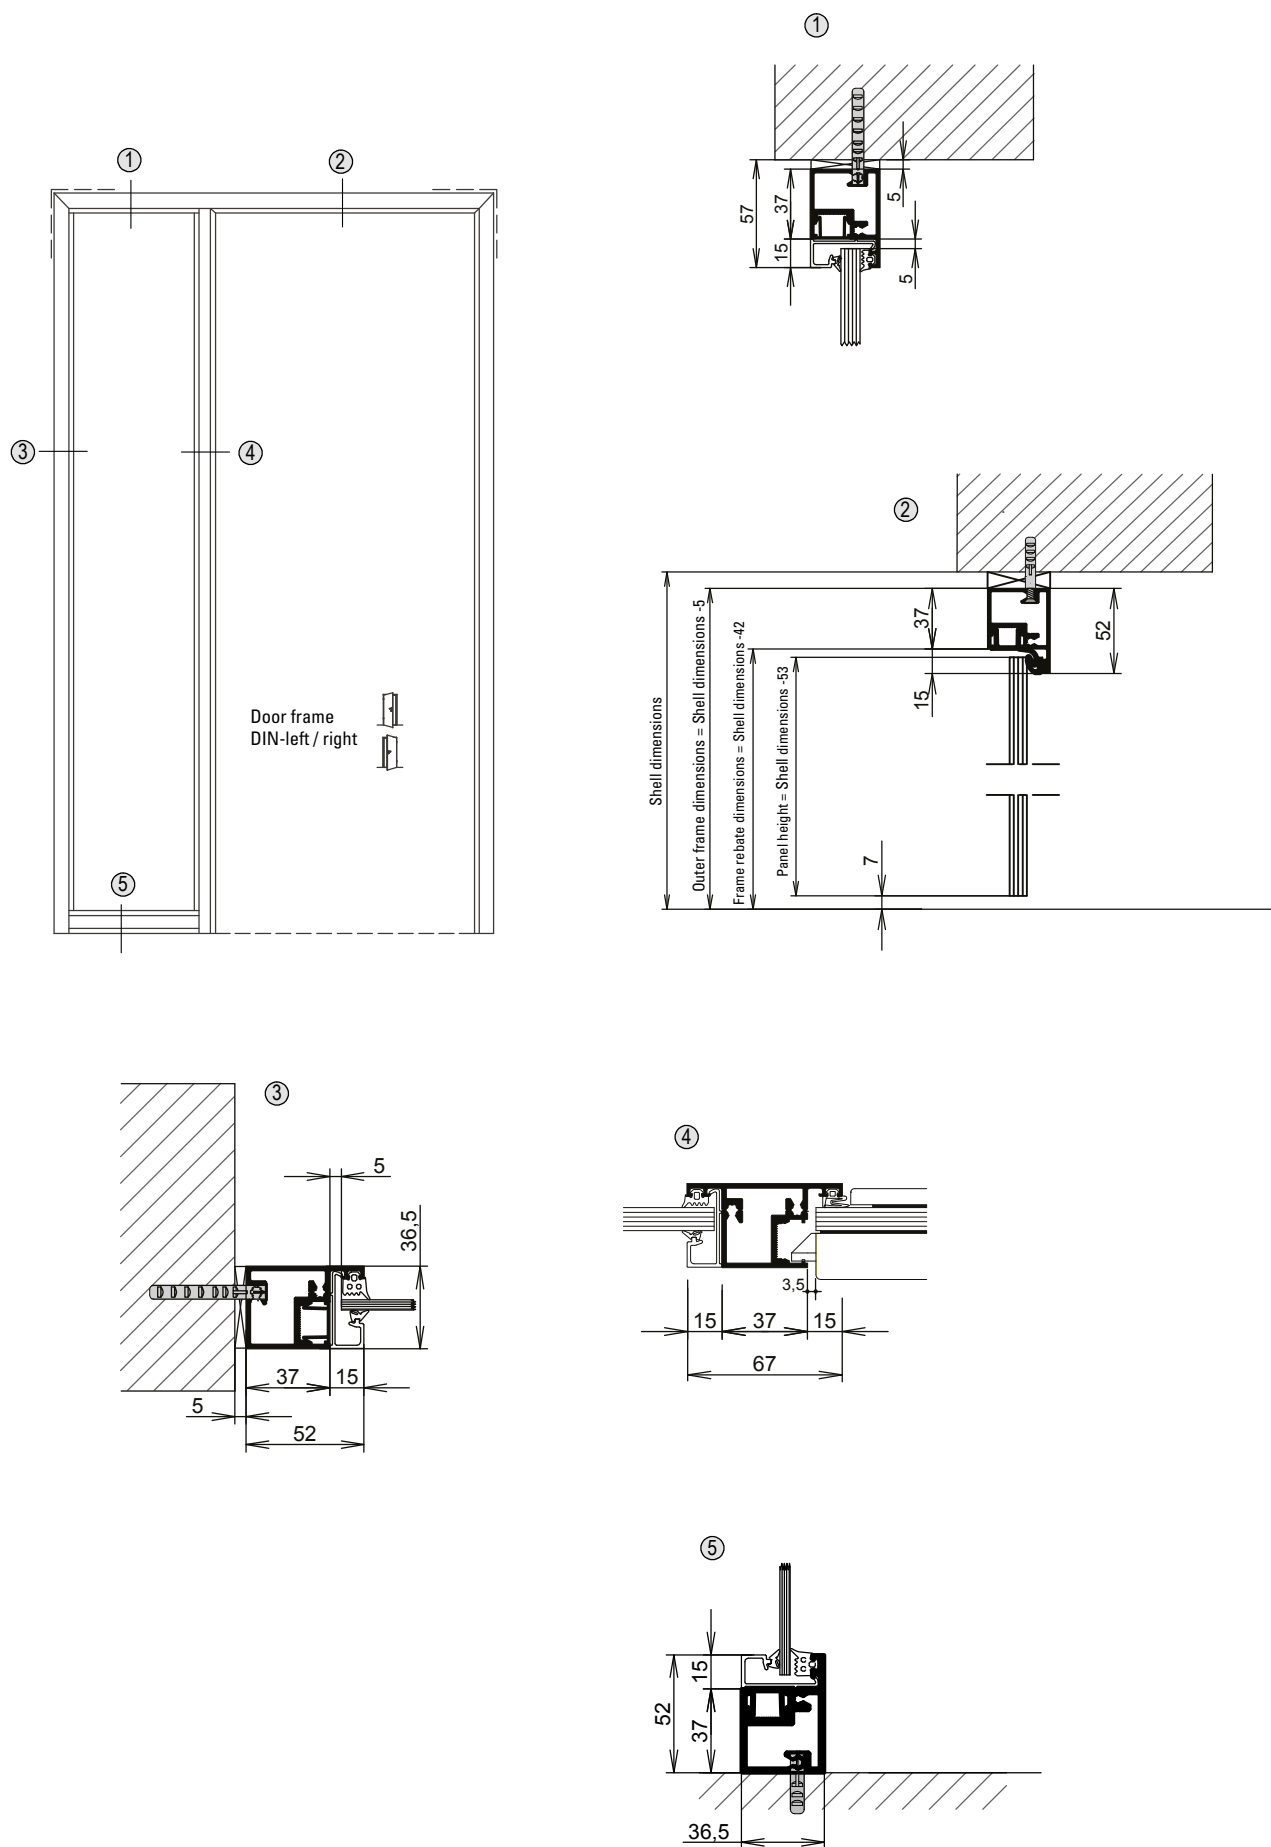

Deduction Dimensions for Type FTP5

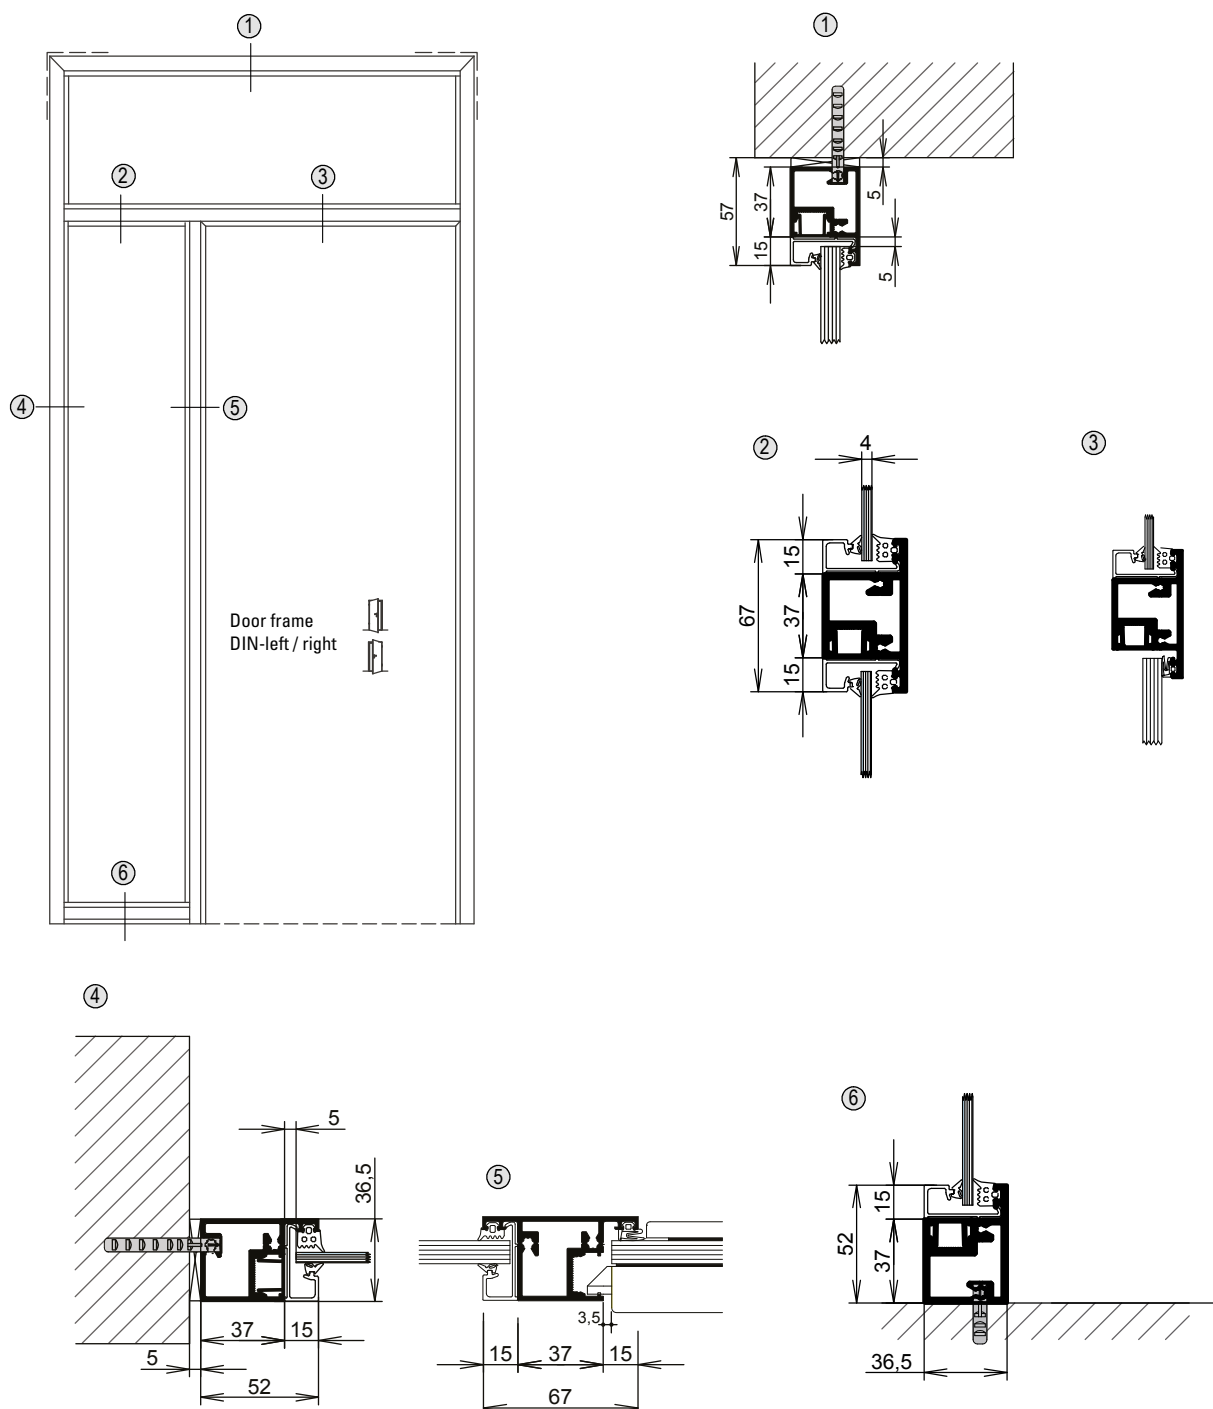



Deduction Dimensions for Type FTP6

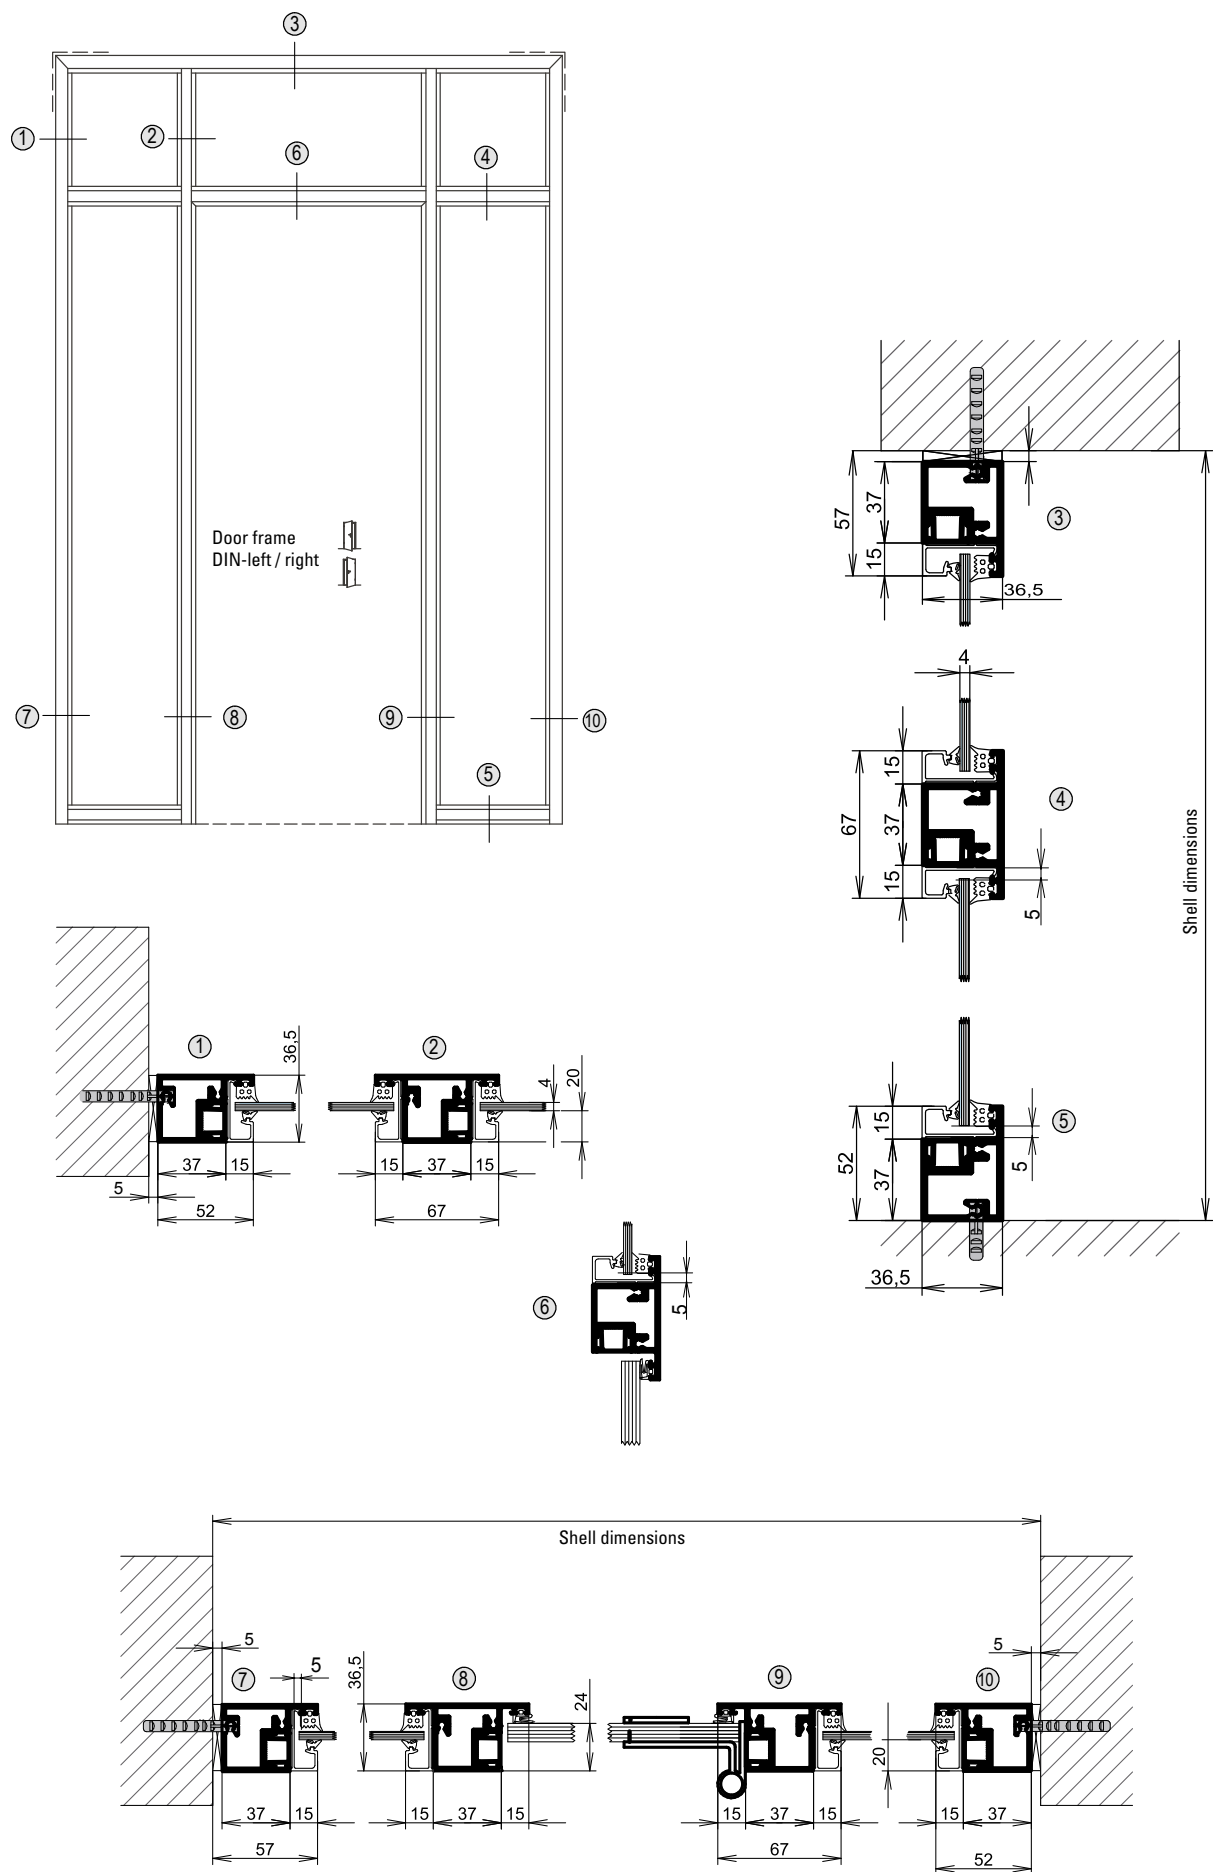

Glass processing



Standard glass door with frame

The image shows a glass door using standard frames in compliance with DIN 18101

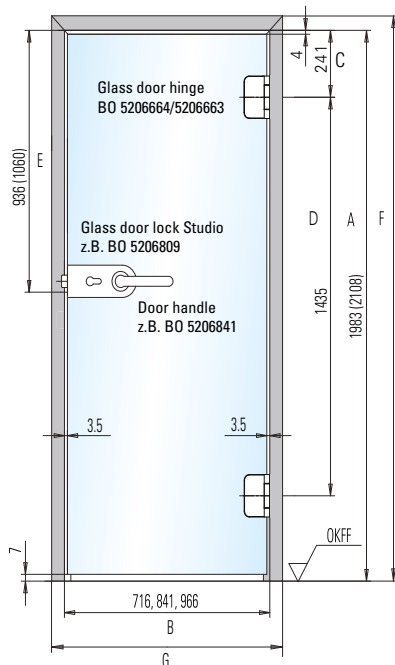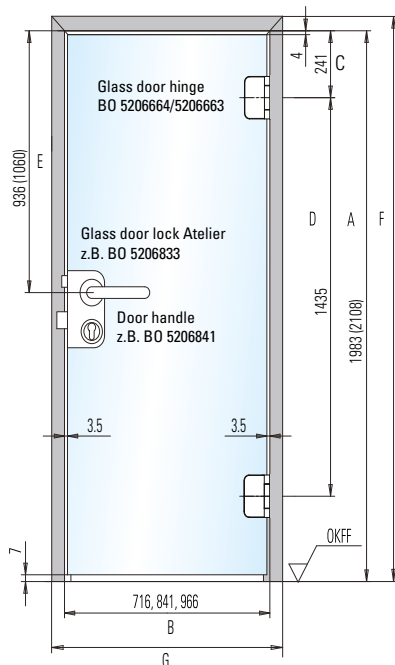

Standard glass door with frame

The image shows the glass processing for a standard door

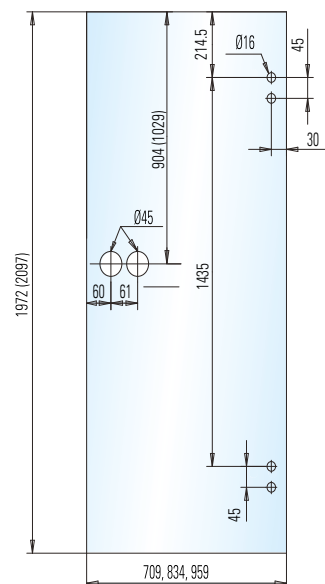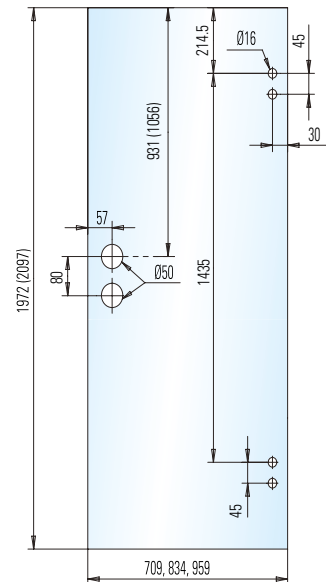

Explanations:

- A Frame rebate dimension / height
- B Frame rebate dimension / width
- C Hinge reference dimensions per DIN 18268
- D Hinge distance dimensions per DIN 18111
- E Centre door latch to frame rebate
- F Frame height
- G Frame width

Measurement Reports for the Sound Insulation Testing



G.-Nr. SEII/0012/16
A.-Nr. 81 13 47 90 24
Datum 07.06.2016
Zeichen Hrd

TÜV NORD Systems
GmbH & Co. KG
Bereich Energietechnik
Gruppe Immissionsschutz
Am Technologiepark 1
45307 Essen

Tel.: 0201/825-33 68

Fax: 0201/825-33 77

www.tuev-nord.de

Amtsgericht Hamburg
HRA 102137

Geschäftsführung
Rudolf Wieland (Sprecher)
Dr. Ralf Jung
Ulf Theike

TÜV®

Messbericht

Messung der Luftschalldämmung einer Glas-Innentür der Bohle AG im Prüfstand


Auftraggeber: Bohle AG
Dieselstraße 10
D-42781 Haan

Umfang: 15 Seiten, davon 8 Anlagen

Grundlagen: EN ISO 10140-1:2010
+A1: 2012 + A2:2014
EN ISO 10140-2:2010
EN ISO 717-1:2013

Produkt: Glasinnentür
Bezeichnung: Frametec Premium
Typ: Glastür aus 8mm ESG
Zarge: Aluminium-Blockzarge
Flächenbezogene Masse: 20 kg/m²
Baurichtmaß (B × H) der Zarge: 1050 mm × 2150 mm
Dichtungen: 1 Zargenfalzdichtung
1 absenkbare Bodendichtung

Messkurve :



Prüfaufbau:



Bewertetes Schalldämm-Maß R_w
Spektrum-Anpassungswerte C und C_{tr} : **$R_w(C;C_{tr}) = 31 (-2;-2)$ dB**

erstellt:

Dipl.-Ing. Dirk Hausrad

geprüft:

Dipl.-Phys. Ing. Frank Overdick



Durch die DAKKS nach DIN EN ISO/IEC 17025
akkreditiertes Prüflaboratorium.
Die Akkreditierung gilt für die in der Urkunde
aufgeführten Prüfverfahren.

Das Labor ist darüberhinaus
bekanntgegebene Messstelle
nach § 29b BImSchG

Dieses Dokument wurde im Rahmen des erteilten Auftrages für das oben genannte Projekt erstellt und unterliegt dem Urheberrecht. Jede anderweitige Verwendung, Mitteilung oder Weitergabe an Dritte sowie die Bereitstellung im Internet – sei es vollständig oder auszugsweise – bedarf der vorherigen schriftlichen Zustimmung des Urhebers.

G.-Nr. SEII/0012/16
A.-Nr. 81 13 47 90 24
Datum 13.06.2016
Zeichen Hrd

**TÜV NORD Systems
GmbH & Co. KG**
Bereich Energietechnik
Gruppe Immissionsschutz
Am Technologiepark 1
45307 Essen

Tel.: 0201/825-33 68
Fax: 0201/825-33 77
www.tuev-nord.de

Amtsgericht Hamburg
HRA 102137

Geschäftsführung
Rudolf Wieland (Sprecher)
Dr. Ralf Jung
Ulf Theike

TÜV®

Messbericht

Messung der Luftschalldämmung einer Glas-Innentür mit Seitenteil und Oberlicht der Bohle AG im Prüfstand

Auftraggeber: Bohle AG
Dieselstraße 10
D-42781 Haan

Umfang: 15 Seiten, davon 8 Anlagen

Grundlagen: EN ISO 10140-1:2010
+A1: 2012 + A2:2014
EN ISO 10140-2:2010
EN ISO 717-1:2013

Produkt: Glasinnentür mit Seitenteil und
Oberlicht (Seitenteil gestoßen)

Bezeichnung: Frametec Premium

Typ: Glaselemente aus 10 mm ESG


Zarge: Aluminium-Blockzarge

Flächenbezogene Masse: 25 kg/m²

Baurichtmaß der Zarge: 1762 mm × 2625 mm

Dichtungen: 1 Zargenfalzdichtung
1 absenkbare Bodendichtung
Dichtprofil Profilnr.: 1107 / PVC /
Estorfer

Messkurve :

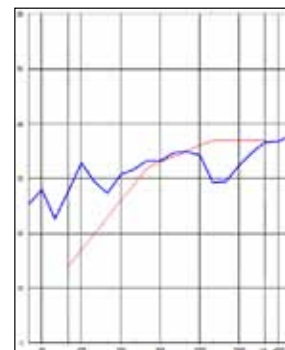

Prüf Aufbau:



Bewertetes Schalldämm-Maß R_w
Spektrum-Anpassungswerte C und C_{tr} : **$R_w(C; C_{tr}) = 33 (-1; -1)$ dB**

erstellt:

Dirk Hausrad
Dipl.-Ing. Dirk Hausrad

geprüft:

Frank Overdick
Dipl.-Phys. Ing. Frank Overdick



Durch die DAkkS nach DIN EN ISO/IEC 17025
akkreditiertes Prüflaboratorium.
Die Akkreditierung gilt für die in der Urkunde
aufgeführten Prüfverfahren.

Das Labor ist darüberhinaus
bekanntgegebene Messstelle
nach § 29b BImSchG

Dieses Dokument wurde im Rahmen des erteilten Auftrages für das oben genannte Projekt erstellt und unterliegt dem Urheberrecht. Jede anderweitige
Verwendung, Mitteilung oder Weitergabe an Dritte sowie die Bereitstellung im Internet – sei es vollständig oder auszugsweise – bedarf der vorherigen
schriftlichen Zustimmung des Urhebers.





Accessories for FrameTec Frame System

 Glass Door Hinge with Screw-On Plate Aluminium



i Glass thickness 8 - 10 mm · Door weight per pair max. 38 kg · Projection max. 1000 mm · Material Aluminium

Art. No.	Finish
BO 5206664	anodised aluminium EV1
BO 5206663	stainless steel look






▶ Glass Door Hinge with Square Screw-on Plate



● Door weight per pair max. 80 kg · Projection max. 1000 mm · Glass thickness 8 - 10 mm · Finish matt brushed · Material stainless steel

Art. No.	
BO 5206639	






 Glass Door Lock Studio Private Line, curved, Euro profile cylinder




Lock prepared for profile cylinder · noise-reducing internal plastic parts · nickel plated brass latch bolt · single throw / 19 mm bolt projection · left and right hand installation · tested according to DIN 18251, class 3 (cycles: latch tests 200,000, bolt tests 50,000) · 61 mm profile cylinder, flush on counterplate side · suitable for standard lever handles without roses which are supplied with 8 mm square pin and 18 mm shoulder guide · M5 stainless steel screws (torque setting 3 Nm)

i Glass thickness 8 (10) mm · rebate depth 24 (26) mm · Material Aluminium




Art. No.	Finish
BO 5206809	anodised aluminium EV1
BO 5206810	stainless steel look







i Glass thickness 8 (10) mm · rebate depth 24 (26) mm · Material Aluminium

Technical drawing of a mechanical part, likely a bracket or support, showing dimensions: 16, 21, and 9.



i Glass thickness 8 (10) mm · rebate depth 24 (26) mm · Stopper DIN left · Material Aluminium









Glass Door Lock Atelier F/R Business Line, DIN right, Euro profile cylinder



Lock prepared for profile cylinder · noise-reducing internal plastic parts · nickel plated metal latch · double throw / 20 mm bolt projection · tested according to DIN 18251 - class 4 (closing cycles: bolt closing test 100,000, latch permanent test 500,000) · 61 mm profile cylinder, flush on counterplate side · suitable for standard lever handles without roses which are supplied with 8 mm square pin and 18 mm shoulder guide · M5 stainless steel screws (torque setting 5 Nm) · available with stainless steel covers

i Glass thickness 8 (10) mm · rebate depth 24 (26) mm · Stopper DIN right · Material Aluminium

Art. No.	Finish
BO 5206835	anodised aluminium EV1
BO 5206836	stainless steel look




Door Handle Studio U-shaped



i Glass thickness 8, 10 mm · Shape round · Material Aluminium


Art. No.	Finish
BO 5206841	anodised aluminium EV1
BO 5206842	stainless steel look



Door Handle Studio flat oval



i Glass thickness 8, 10 mm · Shape flat oval · Material Aluminium





Art. No.	Finish
BO 5206843	anodised aluminium EV1
BO 5206844	stainless steel look

▶ Door Handle Studio L-Shaped



i Glass thickness 8, 10 mm · Shape L · Material Aluminium

Art. No.	Finish
BO 5206845	anodised aluminium EV1
BO 5206846	stainless steel look



▶ Double Profile Cylinder



With emergency function


i With 3 keys · Version individual key · Length 27.5 / 27.5 mm · Finish matt nickel-plated · Material brass

Art. No.
BO 5206656

▶ U-Channels 20 x 20 x 20 x 2 mm



For framing glass panels, for edge protection or for all-glass constructions and diverse applications · aluminium, minimum surface roughness, exquisite-looking finish



i Length 5000 mm

Art. No.	Finish
BO 5201591	anodised E6/EV1
BO 5201593	stainless steel look
BO 5201592	shiny chrome-plated

▶ U-Channels 30 x 20 x 30 x 2 mm



For framing glass panels, for edge protection or for all-glass constructions and diverse applications · aluminium, minimum surface roughness, exquisite-looking finish



i Length 5000 mm

Art. No.	Finish
BO 5201621	anodised E6/EV1
BO 5201623	stainless steel look
BO 5201622	shiny chrome-plated



U-Channels 40 x 20 x 40 x 2 mm



For framing glass panels, for edge protection or for all-glass constructions and diverse applications · aluminium, minimum surface roughness, exquisite-looking finish

i Length 5000 mm

Art. No.	Finish
BO 5201601	anodised E6/EV1
BO 5201603	stainless steel look
BO 5201602	shiny chrome-plated





Silicone Profile



i For Fixed Sidelight · suitable for different profiles, you can find the corresponding table in our Online Shop · Colour black · Material Silicone · Packaging unit 25 m

Art. No.	Description · Length
BO 5201735	Silicone profiles for clamping glass in U-channels. · 25 m



Drop Down Seals Bohle GS-A



Ideal for sealing already installed smooth glass, metal, aluminium, wooden and plastic doors · Sealing strips can be trimmed, please consider the minimum length · Incl. cover strip silver-coloured · Sound insulation 41 dB

i Finish anodised aluminium EV1 · Material Aluminium

Art. No.	Length
BO 5220721	610 - 735 mm
BO 5220722	736 - 860 mm
BO 5220723	861 - 985 mm
BO 5220724	986 - 1110 mm



Adhesive Bonding Tapes Bohle Duplocoll®



- For different applications, such as all-glass partition walls, furniture, shower cubicles and much more
- For different materials, such as wood, aluminium, plastic, ceramic or glass
- High transparency due to a light refractive index almost identical to glass
- Antimicrobial effect - inhibits growth of microorganisms
- By sealing the edges of the adhesive tape, Duplocoll® becomes dry after adhesion and resistant to external influences
- Elongation of up to 500% and highly split-resistant
- Resistant to chemicals and softeners
- Very good initial tack, lasting ultimate bonding strength
- Also suitable for rough surfaces: The viscoelastic adhesive film distributes evenly across rough surfaces.
- Resistant to ageing and UV radiation, economic, high quality and does not affect the external appearance of the construction

i Thickness 3 mm · Colour transparent · Roll length 12 m · Max. allowable continuous temperature: -40°C - +100 °C

Please note: Please use the corresponding applicator to ensure simple and precise application on the glass edge.

Art. No.	Description · Width · Glass thickness
BO 5207936	Adhesive Bonding Tapes · 5 mm · 8 mm
BO 5207938	Adhesive Bonding Tapes · 7 mm · 10 mm
BO 5207935	Adhesive Bonding Tapes · 9 mm · 12-12.7 mm
BO 5209630	Adhesive Bonding Tapes · 14 mm · 17.52 mm
BO 5207939	Applicator · for glass 8, 10 mm
BO 5207948	Inlay for BO 5207939 · for glass 10, 12 mm
BO 5207946	Applicator · for glass 10.76; 12.7; 12.76 mm
BO 5207947	Inlay for BO 5207946 · for glass 8.76; 10.76 mm
BO 5207949	Inlay for BO 5207946 · for glass 17.52 mm

We recommend seaming tools BO 650.30 or BO 650.32 as auxiliary tools for joining the glass panes.



United Kingdom and Ireland

Bohle Ltd.
Fifth Avenue
Tameside Park · Dukinfield
Cheshire · SK16 4PP

T +44 161 342 1100
F +44 161 344 0111

info@bohle.ltd.uk