



Formpave

Small element paving

Small element paving has been designed to work both in isolation and in conjunction with the Royal Forest range of paving, kerb and edge blocks.

Conventional square, stepped and diamond patterns can be easily created in either single or mixed colours. When used in conjunction with the Royal Forest range of paving, permutations are infinite.

Use: Footpaths on commercial, industrial and domestic sites. All slabs conform to BS7263 Part 1 - 1990.

Thickness: Square and rectangular: 60mm. 100mm are available to special order.


Spacing nibs: 1.5mm nibs are incorporated within the block dimensions, to standardize joint widths.

Chamfer: Each block has a chamfer on all top surfaces. A fine line chamfer block, for areas where trolleys are in use, is available to special order.

Aggregate/skid resistant: The blocks are available in normal aggregate or high skid resistant gritstone to special order.

Finishes and colours: All colours and finishes are available to special order only.

Rectangular

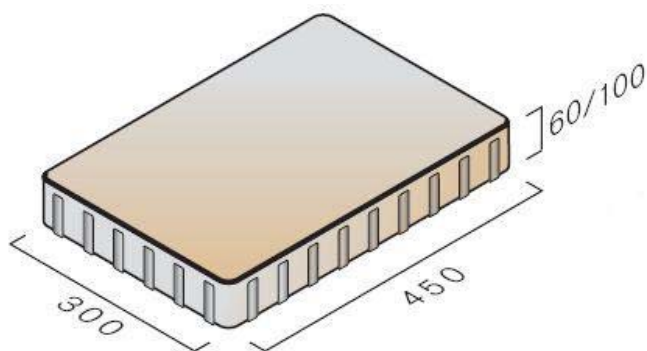

Square

