



SkyAir



Infrastructure
cooling solution



For server rooms, telecom shelters, laboratories, IT applications

Infrastructure cooling

Why is it needed?

An infrastructure cooling system removes the heat that is constantly generated by IT equipment, servers and business supporting equipment.


- › For rooms and enclosures that require round-the-clock cooling



- › Where continuous uptime is the absolute requirement for
 - › server data protection
 - › equipment protection

To serve the increasing digital and mobile data requirements of businesses and online consumers, IT equipment, telecom and server infrastructure function round the clock. Unexpected or unplanned downtime is not only costly to businesses but also impacts end-consumers who depend on continuous access to data connections.

24/7 operation of the infrastructure in turn increase the heat loads generated within IT/server rooms and telecom shelters. Therefore your business infrastructure requires **reliable, efficient** and **flexible** cooling to ensure maximum uptime while offering the best return on investment.

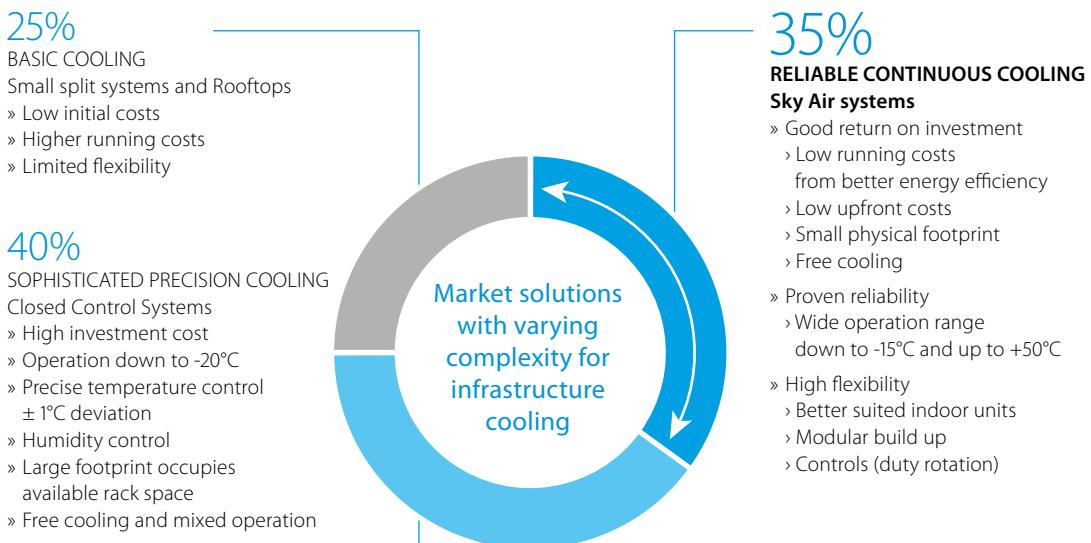

Infrastructure cooling environments



Telecom shelters



Server rooms




Laboratories

Infrastructure cooling

Understanding the mission-critical cooling application environment

Comfort cooling


- Humidity is present
- Balanced sensible and latent capacity

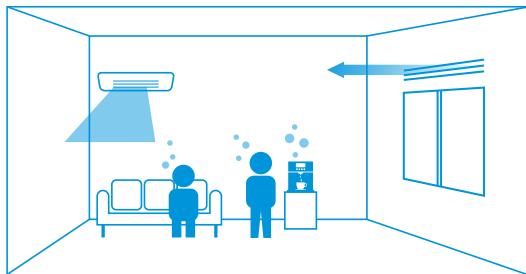

- 60-70% temperature control
- 30-40% humidity control

Infrastructure cooling

- No or limited humidity
- Pure sensible capacity

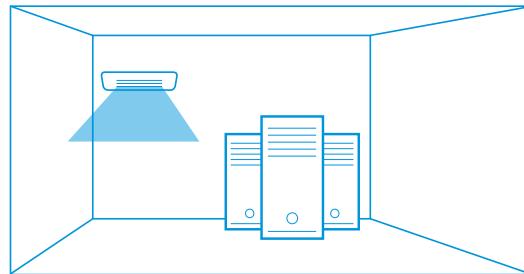

- 80-90% temperature control
- 10-20% humidity control

Low humidity levels

Unlike a normal living environment, a typical server room or technology infrastructure environment does not generate or generates minimal humidity and moisture. Continuous cooling of such rooms also removes the humidity. The average relative humidity (RH) levels in server rooms or infrastructure rooms are lower than 30%.

These low humidity levels reduce the ability to transfer heat loads (to cool down the server rooms). Therefore there is a need **to boost** the cooling capacity of the indoor system.

Need for a reliable backup system

- › When a failure occurs (due to error or shutdown by the temperature protection function), a dependable backup system should take over instantly
- › Flexible control is needed to improve the reliability of the backup system

Constant cooling set at 20-22°C

- › Protection of server equipment and back up power supply
- › Emergency power supply lifetime is temperature dependant
- › There is an adequate buffer to compensate for a potential rise in temperature
- › In general, servers and other equipment infrastructure fluctuate in activity, so have increased flexibility to maintain constant temperature levels

Correct system selection is critical

- › Failure of the cooling system to provide the required capacity at any time can lead to infrastructure downtime and result in business costs
- › It is critical to install a split cooling system which can guarantee reliable operation 24/7, year-round

Why choose Daikin?

Daikin is the world leader when it comes to heating and cooling. With over 90 years of innovation and engineering expertise in specialised cooling, Daikin offers a Sky Air solution that is **reliable**, **efficient** and **flexible** to meet the demanding needs of infrastructure cooling environments.

Reliable

Guaranteed system operation:

- › Oversized indoor units boost cooling capacity and prevent freeze-ups on the indoor side
- › Wide operating range envelope: operation range in cooling down to -15°C and up to +50°C

Efficient

Optimum return on investment:

- › Lowers running costs by using highly efficient direct expansion cooling systems
- › Lower running costs compared to other DX systems and water based chillers.
- › Minimises environmental impact with A++ energy labels
- › Reduces mechanical cooling and energy consumption with the free cooling option for single phase systems

Flexible

- › Scalable in capacity
- › Improved infrastructure control and management
- › Lower physical footprint since no floor space is occupied
- › Wide range of indoor units to suit application preferences (ceiling suspended cassettes, wall mounted indoors, concealed ceiling ducted type indoors)

PAGE 5 UNIQUE

Dedicated system combinations

Benefits

1. Boost the heat transfer capacity of the indoor system
2. Ability to work with higher evaporation temperatures (T_e) avoids downtime and enables continuous operation
3. Official energy labels for indoor and outdoor system combinations provide standardized and reliable performance data

PAGE 6 UNIQUE

2-step solution for system selection

Benefits

1. Daikin makes the system selection procedure easy and reliable by providing detailed capacity tables based on extensive testing.
2. Choose the best product combination that meets end-user requirements

PAGE 10 UNIQUE

Efficient cooling

Benefits

1. Free cooling: optimum energy efficiency using cold ambient air
2. Widest range of indoor systems with best in class energy efficiency
3. Wide indoor and outdoor operation range, reliable performance even in extreme conditions

PAGE 12 UNIQUE

Flexible control

Benefits

1. Optimal backup supported by duty rotation control, automatic backup activation and remote alarms
2. Guaranteed continuous operation from extended compressor limits
3. Controller settings to adapt to specific infrastructure cooling environment conditions
4. Fewer start/stop cycles

Boosted capacity indoor systems

High reliability at lower running costs for infrastructure cooling

Split air conditioning systems for normal comfort cooling applications usually combine indoor systems with matching capacities, or multiple indoor systems with capacities lower than the outdoor system's capacity. This works because the indoor system's cooling capacity is sufficient to handle the higher humidity conditions and varying indoor temperature requirements that are common in a normal living environment.

Applying this design logic to infrastructure cooling environments can lead to risky situations that might compromise overall system reliability and frequent downtimes of 15 minutes.


Indoor systems for infrastructure cooling environments need enhanced capabilities for continuous heat transfer because they work harder to extract energy by cooling dry air. Daikin UK recommends and offers asymmetric combinations (boosted capacity indoor combinations: e.g. 71 class outdoor + 100 class indoor).

With Daikin Sky Air, you benefit from boosted capacity system combinations for infrastructure cooling. You can now confidently combine indoor systems with higher capacities than the outdoor system. This will boost heat transfer inside the technology or server room environments.

Infrastructure cooling application system solutions


TRADITIONAL SOLUTION

Symmetric indoor-outdoor system combination

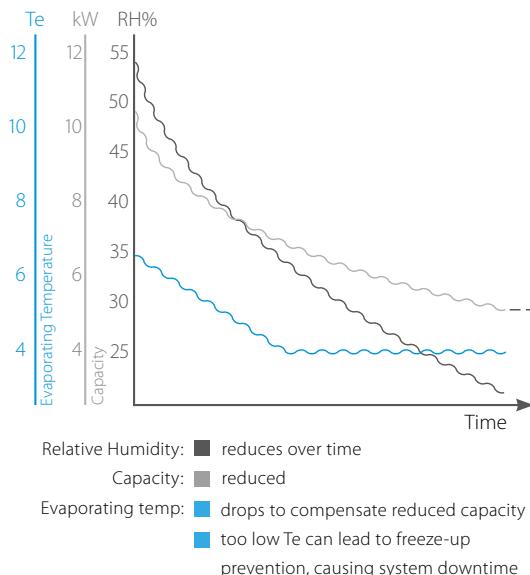

DEDICATED SOLUTION

Boosted capacity indoor system combination

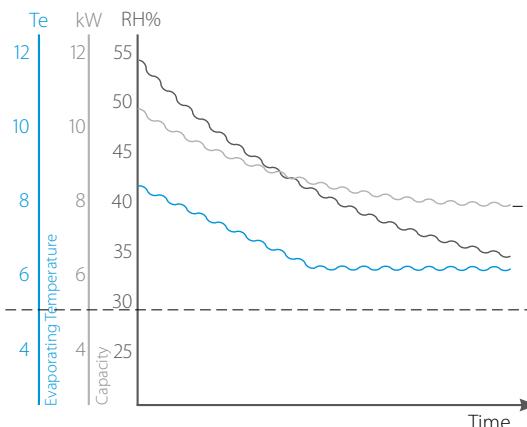

Between 20-40% sensible capacity increase

improved solution

- thumb-up Boosted capacity indoors increase the heat transfer capacity at low relative humidity
- thumb-up Allows the system to operate with higher Te, guaranteeing continuous operation and reducing unwanted dehumidification

Low humidity + Low ambient environment

Outside temperature Ta	-5 °C
Set-point	22 °C
Humidity	35 %
Indoor wet-bulb temperature	13 °C

EER

TRADITIONAL SOLUTION 100%
IMPROVED SOLUTION 82%

18% savings on running cost

traditional solution

RZQG71L9V1 + FAQ71C9

Total Capacity (TC)	5.63 kW
Sensible Heat Capacity (SHC)	4.28 kW
Power Input (PI)	2 kW
Co-efficient of Power Input (CPI)	0.39
Corrected PI	0.78 kW
EER*	5,5

dedicated system combination solution

RZQG71L9V1 + FAQ100C9

Total Capacity (TC)	6,02 kW
Sensible Heat Capacity (SHC)	6,02 kW
Power Input (PI)	2 kW
Co-efficient of Power Input (CPI)	0,45
Corrected PI	0,90 kW
EER*	6,7

Sensible Heat Capacity increases 20-40% with dedicated system combination.

*EER = (SHC/Corrected PI)

Two-Step Solution for System Selection

High reliability for infrastructure cooling

UNIQUE

Select your infrastructure cooling system in two steps

No humidity generation in room
(eg: server room)

IT room requires 22°C inside. It will have 7kW of sensible cooling demand, and no latent cooling demand (no humidity generation) throughout the year.

A ceiling suspended indoor unit is the customer's preference for the server room.

Indoor temperature = 22°CDB
Sensible cooling demand (SHC) = 7 kW
Latent cooling demand (LC) = 0 kW*
Total cooling demand (TC) = SHC + LC = 7 kW
Outdoor temperature operating range = -15°C ~ +40°C
Most stringent outdoor unit capacity condition = -15°C

SOLUTION

Boosted capacity indoor combination
with 10kW outdoor system.

RZOG100L8Y1/ FHO140CB

Total capacity = 7.48 kW

Sensible capacity = 748 kW

$$\text{Power input} = 0.42 \times 2.49 = 1.04 \text{ kW}$$

* If there is no latent cooling demand, look for conditions where $TC = SHC$, since no more dehumidification will occur and thus the indoor environment will stabilize. When $TC > SHC$ and there is no humidity generation, the indoor humidity will gradually decrease.



Some humidity source in room
(eg: laboratory)

A laboratory requires 22°C inside. It will have 9 kW of sensible cooling demand, and some humidity generation in the room (est. indoor humidity level: 42%).

A wall mounted indoor unit is the customer's preference for the laboratory.

Indoor temperature = 22°CDB
Indoor Relative Humidity (RH%) = 42%**
Sensible cooling demand (SHC) = 9 kW
Latent cooling demand (LC) = 0.9 kW
Total cooling demand (TC) = SHC + LC = 9.9 kW
Outdoor temperature operating range = -10°C ~ +40°C
Most stringent outdoor unit capacity condition = -10°C

SOLUTION

Boosted capacity indoor combination
with 12.5kW outdoor system.

RZOG125L9V1/ FAO71C9 x 2

Total capacity = 10.45 kW

Sensible capacity = 934 kW

Power input = $0.48 \times 3.69 = 1.78$ kW

** System capacity at 42%RH (14.2°CWB) can be found by interpolation between 13°CWB (35%) and 15°CWB (48%).

Combination table for boosted capacity indoor systems

Sky Air	Wall mounted	Ceiling suspended unit	Concealed ceiling unit with medium ESP	Concealed ceiling unit	4-way blow ceiling mounted cassette	Floor standing unit	Fully flat cassette	High COP, round flow cassette	Round flow cassette
Model	FAQ71C9 FAQ100C9 FHQ35CB FHQ30CB FHQ60CB FHQ71CB FHQ100CB FHQ125CB FHQ140CB	P 3 2 P P P P P P P P	FBQ35D FBQ50D FBQ60D FBQ71D FBQ100D FBQ125D FBQ140D FDXS35F FDXS50F9 FDXS60F	FBQ35D FBQ50D FBQ60D FBQ71D FBQ100D FBQ125D FBQ140D FUQ21C FUQ100C FUQ125C FUQ140C FUQ21C FUQ100C FUQ125C FUQ140C FFQ35C FFQ50C FFQ60C FCQHGT1F FCQHGT10F FCQHGT25F FCQHGT40F FCQG35F FCQG50F FCQG60F FCQG71F FCQG100F FCQG140F FCQG150F FCQG160F FCQG171F FCQG100F FCQG125F	FHQ140CB FHQ125CB FHQ100CB FHQ80CB FHQ60CB FHQ40CB FHQ25CB FHQ15CB FHQ10CB FHQ7CB FHQ5CB FHQ3CB FHQ2CB FHQ1CB FHQ100V1B FHQ125L9V1B FHQ140L9V1B FHQ140L7Y1B				
RZQG71L9V1B	P 3 2	P	FHQ35CB	FHQ35D	FBQ35D	FHQ140CB	FHQ140CB	FHQ140CB	FHQ140CB
RZQG71L8Y1B									
RZQG100L9V1B	2	4 3	2	P	P	P	P	P	P
RZQG100L8Y1B	2	4 3	2	P	P	P	P	P	P
RZQG125L9V1B	2	4 3	2	P	P	P	P	P	P
RZQG125L8Y1B	2	4 3	2	P	P	P	P	P	P
RZQG140L9V1B	2	4 3	2	P	P	P	P	P	P
RZQG140L7Y1B	2	4 3	2	P	P	P	P	P	P

Possible combinations: P = Pair 2 = Twin 3 = Triple 4 = Double Twin

Notes: The capacities in the table are combined capacities (multiple units operating simultaneously) and not individual indoor unit capacities. When combining multiple indoor units, designate the master unit as the unit which has the remote controller equipped with the most functions. Refer to the option list when selecting the correct refnet kit required to install a multi-combination.




UNIQUE

Seasonal energy labels for boosted capacity indoor system combinations

Sky Air boosted capacity indoor system combinations for infrastructure cooling are now available with **seasonal energy labels**.

Providing seasonal energy labels for any combination below 12kW is a legal requirement (Eco-Design Directive).

With the official seasonal energy labelling, Daikin sets the standard for efficient Sky Air systems for infrastructure cooling applications.

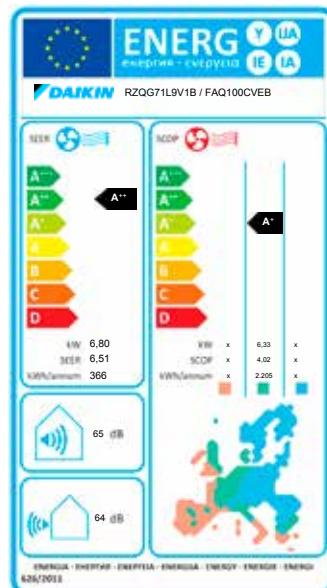

Performance characteristics

- 1 Standard capacity tables extend down to -15°C Outdoor Temperature (Ta)
- 2 Dedicated Dry Bulb (°CDB) and Wet Bulb (°CWB) temperature combinations, from 27°C down to 16°C DB set indoor temperature, and from 55% - 21% relative humidity (RH%)
- 3 Easy interpolation between different conditions (to calculate intermediate RH%, indoor and ambient conditions)

Indoor		
RH [%]	°CWB	°CDB
55	11	16
42	11	18
...
22	14	27

Outdoor temperature [°C DB]					
-15			1	...	20
TC	SHC	CPI	TC	SHC	CPI
kW	kW	-	kW	kW	-
4.81	3.98	0.34	4.81	3.98	0.48
4.81	4.67	0.34	4.81	4.67	0.48
6.62	6.62	0.38	6.62	6.62	0.72

Performance characteristics

for boosted capacity indoor combinations

Boosted capacity indoors with 7kW outdoor system

RZQG71L9V1 / RZQG71L8Y1

Indoor	Outdoor temperature [°C DB]																							
	-15				-10				-5				0				5				10			
	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI
RH [%]	°CWB	°CDB		kW	kW	-																		
54.5	11	16		4.81	3.98	0.34	4.81	3.98	0.36	4.81	3.98	0.37	4.81	3.98	0.39	4.81	3.98	0.43	4.81	3.98	0.46	4.81	3.98	0.48
41.8	11	18		4.81	4.67	0.34	4.81	4.67	0.36	4.81	4.67	0.37	4.81	4.67	0.39	4.81	4.67	0.41	4.81	4.67	0.43	4.81	4.67	0.48
57	13			6.02	5.05	0.37	6.02	5.05	0.41	6.02	5.05	0.45	6.02	5.05	0.50	6.02	5.05	0.52	6.02	5.05	0.55	6.02	5.05	0.64
31.4	11			4.81	4.81	0.34	4.81	4.81	0.36	4.81	4.81	0.37	4.81	4.81	0.39	4.81	4.81	0.41	4.81	4.81	0.43	4.81	4.81	0.48
44.9	13	20		6.02	6.02	0.37	6.02	6.02	0.41	6.02	6.02	0.45	6.02	6.02	0.50	6.02	6.02	0.52	6.02	6.02	0.55	6.02	6.02	0.57
52	14			6.62	5.76	0.38	6.62	5.76	0.44	6.62	5.76	0.50	6.62	5.76	0.55	6.62	5.76	0.58	6.62	5.76	0.62	6.62	5.76	0.72
22.9	11			4.81	4.81	0.34	4.81	4.81	0.36	4.81	4.81	0.37	4.81	4.81	0.39	4.81	4.81	0.41	4.81	4.81	0.43	4.81	4.81	0.46
34.8	13	22		6.02	6.02	0.37	6.02	6.02	0.41	6.02	6.02	0.45	6.02	6.02	0.50	6.02	6.02	0.52	6.02	6.02	0.55	6.02	6.02	0.57
47.6	15			7.22	6.06	0.39	7.22	6.06	0.46	7.22	6.06	0.54	7.22	6.06	0.61	7.22	6.06	0.63	7.22	6.06	0.66	7.22	6.06	0.79
54.3	16			7.82	5.71	0.41	7.82	5.71	0.49	7.82	5.71	0.58	7.82	5.71	0.66	7.82	5.71	0.69	7.82	5.71	0.72	7.82	5.71	0.75
21.2	12			5.41	5.41	0.36	5.41	5.41	0.38	5.41	5.41	0.41	5.41	5.41	0.44	5.41	5.41	0.46	5.41	5.41	0.49	5.41	5.41	0.52
32.1	14	24		6.62	6.62	0.38	6.62	6.62	0.44	6.62	6.62	0.50	6.62	6.62	0.55	6.62	6.62	0.58	6.62	6.62	0.60	6.62	6.62	0.63
43.8	16			7.82	6.57	0.41	7.82	6.57	0.49	7.82	6.57	0.58	7.82	6.57	0.66	7.82	6.57	0.69	7.82	6.57	0.72	7.82	6.57	0.75
50	17			8.10	6.08	0.43	8.10	6.08	0.51	8.10	6.08	0.60	8.10	6.08	0.68	8.10	6.08	0.70	8.10	6.08	0.73	8.10	6.08	0.79
21.5	14			6.62	6.62	0.38	6.62	6.62	0.44	6.62	6.62	0.50	6.62	6.62	0.55	6.62	6.62	0.58	6.62	6.62	0.60	6.62	6.62	0.72
26.3	15	27		7.22	7.22	0.39	7.22	7.22	0.46	7.22	7.22	0.54	7.22	7.22	0.61	7.22	7.22	0.63	7.22	7.22	0.66	7.22	7.22	0.79
31.3	16			7.82	7.82	0.41	7.82	7.82	0.49	7.82	7.82	0.58	7.82	7.82	0.66	7.82	7.82	0.69	7.82	7.82	0.72	7.82	7.82	0.75

3D098206A

PAIR	FAQ100C9	FHQ100CB	FBQ100D	FUQ100C	FVQ100C	FCQHG100F	FCQG100F
Cooling	2.00	1.78	1.89	1.67	2.02	1.66	2.01

TWIN	FHQ50CB x 2	FBQ50D x 2	FDXS50F9 x 2	FFQ50C x 2	FCQG50F x 2
Cooling	2.34	2.02	2.23	2.02	2.04

TRIPLE	FHQ35CB x 3	FBQ35D x 3	FDXS35F x 3	FFQ35C x 3	FCQG35F x 3
Cooling	2.39	2.11	2.26	2.07	2.06

Boosted capacity indoors with 10kW outdoor system

RZQG100L9V1 / RZQG100L8Y1

Indoor	Outdoor temperature [°C DB]																							
	-15				-10				-5				0				5				10			
	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI
RH [%]	°CWB	°CDB		kW	kW	-	kW	kW	-	kW	kW	-	kW	kW	-	kW	kW	-	kW	kW	-	kW	kW	-
54.5	11	16		6.00	5.63	0.33	6.00	5.63	0.34	6.00	5.63	0.35	6.00	5.63	0.37	6.00	5.63	0.38	6.00	5.63	0.38	6.00	5.63	0.39
41.8	11	18		6.00	6.00	0.33	6.00	6.00	0.34	6.00	6.00	0.35	6.00	6.00	0.37	6.00	6.00	0.38	6.00	6.00	0.39	6.00	6.00	0.39
57	13			7.48	6.37	0.42	7.48	6.37	0.44	7.48	6.37	0.45	7.48	6.37	0.46	7.48	6.37	0.47	7.48	6.37	0.49	7.48	6.37	0.51
31.4	11			6.00	6.00	0.33	6.00	6.00	0.34	6.00	6.00	0.35	6.00	6.00	0.37	6.00	6.00	0.38	6.00	6.00	0.39	6.00	6.00	0.39
44.9	13	20		7.48	7.25	0.42	7.48	7.25	0.44	7.48	7.25	0.45	7.48	7.25	0.46	7.48	7.25	0.46	7.48	7.25	0.47	7.48	7.25	0.48
52	14			8.22	7.18	0.47	8.22	7.18	0.48	8.22	7.18	0.49	8.22	7.18	0.51	8.22	7.18	0.52	8.22	7.18	0.53	8.22	7.18	0.54
22.9	11			6.00	6.00	0.33	6.00	6.00	0.34	6.00	6.00	0.35	6.00	6.00	0.37	6.00	6.00	0.38	6.00	6.00	0.39	6.00	6.00	0.39
34.8	13	22		7.48	7.48	0.42	7.48	7.48	0.44	7.48	7.48	0.45	7.48	7.48	0.46	7.48	7.48	0.47	7.48	7.48	0.48	7.48	7.48	0.49
47.6	15			8.96	7.82	0.52	8.96	7.82	0.53	8.96	7.82	0.54	8.96	7.82	0.55	8.96	7.82	0.56	8.96	7.82	0.57	8.96	7.82	0.58
54.3	16			9.70	7.54	0.56	9.70	7.54	0.58	9.70	7.54	0.59	9.70	7.54	0.60	9.70	7.54	0.61	9.70	7.54	0.62	9.70	7.54	0.63
21.2	12			6.74	6.74	0.38	6.74	6.74	0.39	6.74	6.74	0.40	6.74	6.74	0.41	6.74	6.74	0.42	6.74	6.74	0.43	6.74	6.74	0.44
32.1	14	24		8.22	8.22	0.47	8.22	8.22	0.48	8.22	8.22	0.49	8.22	8.22	0.51	8.22	8.22	0.52	8.22	8.22	0.53	8.22	8.22	0.54
43.8	16			9.70	8.68	0.56	9.70	8.68	0.58	9.70	8.68	0.59	9.70	8.68	0.60	9.70	8.68	0.61	9.70	8.68	0.62	9.70	8.68	0.63
50	17			9.98	7.86	0.58	9.98	7.86	0.59	9.98	7.86	0.60	9.98	7.86	0.61	9.98	7.86	0.62	9.98	7.86	0.63	9.98	7.86	0.64
21.5	14			8.22	8.22	0.47	8.22	8.22	0.48	8.22	8.22	0.49	8.22	8.22	0.51	8.22	8.22	0.52	8.22	8.22	0.53	8.22	8.22	0.54
26.3	15	27		8.96	8.96	0.52	8.96	8.96	0.53	8.96	8.96	0.54	8.96	8.96	0.55	8.96	8.96	0.56	8.96	8.96	0.57	8.96	8.96	0.58
31.3	16			9.70	9.70	0.56	9.70	9.70	0.58	9.70	9.70</													

Boosted capacity system combination tables

**Boosted capacity indoors with 12.5kW outdoor system
RZOG125L9V1 / RZOG125L8Y1**

Indoor	Outdoor temperature [°C DB]																																			
	-15			-10			-5			0			5			10			15			20			25			30			35					
	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI	TC	SHC	CPI						
RH[%]	°CWB	°CDB		kW	kW	-																														
54.5	11	16		4.79	6.72	0.33	7.49	6.72	0.34	7.49	6.72	0.35	7.49	6.72	0.36	7.49	6.72	0.37	7.49	6.72	0.38	7.49	6.72	0.38	10.25	8.55	0.98	9.71	8.21	1.08	9.17	7.86	1.18	8.69	7.55	1.27
41.8	11	18		7.49	7.49	0.33	7.49	7.49	0.34	7.49	7.49	0.35	7.49	7.49	0.36	7.49	7.49	0.37	7.49	7.49	0.38	7.49	7.49	0.38	10.25	9.60	0.98	9.71	9.28	1.08	9.17	8.94	1.18	8.69	8.60	1.27
57	13			9.34	7.60	0.42	9.34	7.60	0.43	9.34	7.60	0.44	9.34	7.60	0.45	9.34	7.60	0.45	9.34	7.60	0.45	9.34	7.60	0.45	11.91	9.22	0.99	11.41	8.92	1.09	10.91	8.61	1.19	10.37	8.28	1.28
31.4	11			7.49	7.49	0.33	7.49	7.49	0.34	7.49	7.49	0.35	7.49	7.49	0.36	7.49	7.49	0.37	7.49	7.49	0.38	7.49	7.49	0.38	10.25	10.25	0.98	9.71	9.71	1.08	9.17	9.17	1.18	8.69	8.69	1.27
44.9	13	20		9.34	8.65	0.42	9.34	8.65	0.43	9.34	8.65	0.44	9.34	8.65	0.45	9.34	8.65	0.45	9.34	8.65	0.45	9.34	8.65	0.45	11.91	10.27	0.99	11.41	9.96	1.09	10.91	9.64	1.19	10.37	9.31	1.28
52	14			10.27	8.56	0.46	10.27	8.56	0.47	10.27	8.56	0.49	10.27	8.56	0.50	10.27	8.56	0.50	10.27	8.56	0.50	10.27	8.56	0.50	12.88	10.16	0.99	12.54	10.00	1.09	12.21	9.83	1.19	11.87	9.55	1.29
22.9	11			7.49	7.49	0.33	7.49	7.49	0.34	7.49	7.49	0.35	7.49	7.49	0.36	7.49	7.49	0.37	7.49	7.49	0.38	10.25	10.25	0.98	9.71	9.71	1.08	9.17	9.17	1.18	8.69	8.69	1.27			
34.8	13			9.34	9.34	0.42	9.34	9.34	0.43	9.34	9.34	0.44	9.34	9.34	0.45	9.34	9.34	0.45	9.34	9.34	0.45	9.34	9.34	0.45	11.91	11.91	0.99	11.41	11.41	1.09	10.91	10.91	1.19	10.37	10.37	1.28
47.6	15			11.20	9.34	0.51	11.20	9.34	0.52	11.20	9.34	0.53	11.20	9.34	0.55	11.20	9.34	0.54	11.20	9.34	0.54	11.20	9.34	0.54	13.83	11.06	0.99	13.36	10.78	1.09	12.88	10.49	1.20	12.41	10.20	1.29
54.3	16			12.12	9.00	0.55	12.12	9.00	0.57	12.12	9.00	0.58	12.12	9.00	0.59	12.12	9.00	0.59	12.12	9.00	0.59	12.12	9.00	0.59	14.51	10.10	1.00	13.98	9.98	1.10	13.52	9.67	1.20	12.98	9.35	1.30
21.2	12			8.42	8.42	0.37	8.42	8.42	0.38	8.42	8.42	0.39	8.42	8.42	0.41	8.42	8.42	0.41	8.42	8.42	0.41	8.42	8.42	0.41	11.08	11.08	0.98	10.56	10.56	1.08	10.04	10.04	1.19	9.53	9.53	1.27
32.1	14			10.27	10.27	0.46	10.27	10.27	0.47	10.27	10.27	0.49	10.27	10.27	0.50	10.27	10.27	0.49	10.27	10.27	0.49	10.27	10.27	0.49	12.88	12.88	0.99	12.54	12.54	1.09	12.21	12.21	1.19	11.87	11.87	1.27
43.8	16			12.12	10.35	0.55	12.12	10.35	0.57	12.12	10.35	0.58	12.12	10.35	0.59	12.12	10.35	0.59	12.12	10.35	0.59	12.12	10.35	0.59	14.51	11.71	1.00	13.98	11.44	1.10	13.52	11.21	1.20	12.98	10.90	1.30
50	17			12.47	9.38	0.57	12.47	9.38	0.58	12.47	9.38	0.59	12.47	9.38	0.60	12.47	9.38	0.59	12.47	9.38	0.59	12.47	9.38	0.59	15.20	11.36	1.00	14.54	11.02	1.10	13.89	10.66	1.20	13.24	10.25	1.31
21.5	14			10.27	10.27	0.46	10.27	10.27	0.47	10.27	10.27	0.49	10.27	10.27	0.50	10.27	10.27	0.49	10.27	10.27	0.49	10.27	10.27	0.49	12.88	12.88	0.99	12.54	12.54	1.09	12.21	12.21	1.19	11.87	11.87	1.29
26.3	15	27		11.20	11.20	0.51	11.20	11.20	0.52	11.20	11.20	0.53	11.20	11.20	0.55	11.20	11.20	0.54	11.20	11.20	0.54	11.20	11.20	0.54	13.83	13.83	0.99	13.36	13.36	1.09	12.88	12.88	1.20	12.41	12.41	1.41
31.3	16			12.12	12.12	0.55	12.12	12.12	0.57	12.12	12.12	0.58	12.12	12.12	0.59	12.12	12.12	0.58	12.12	12.12	0.56	12.12	12.12	0.54	14.51	14.51	1.00	13.98	13.98	1.10	13.52	13.52	1.20	12.98	12.98	1.30

3D098208A

PAIR	FHQ140CB	FBQ140D	FVQ140C	FCQHG140F	FCQG140F
Cooling	3.58	3.63	3.74	3.00	3.22
TWIN	FAQ71C9 x 2	FHQ71CB x 2	FBQ71D x 2	FUQ71C x 2	FCQHG71F x 2
Cooling	3.69	3.67	4.10	3.44	2.97
					3.17

TRIPLE	FHQ50CB x 3	FBQ50D x 3	FDX550F9 x 3	FFQ50C x 3	FCQG50F x 3
Cooling	3.66	3.97	3.45	3.23	3.17
DOUBLE TWIN	FHQ35CB x 4	FBQ35D x 4	FDX35F x 4	FFQ35C x 4	FCQG35F x 4
Cooling	3.64	3.74	3.94	3.01	3.23

Combinations with 14kW outdoor system **PZOG140L9V1 / PZOG140L7X1**

3D098209A

PAIR	FHQ140CB	FBQ140D	FVQ140C	FCQHG140F	FCQQG140F	
Cooling	4.05	4.00	4.17	4.00	4.17	
TWIN	FAQ71C9 x 2	FHQ71CB x 2	FBQ71D x 2	FUQ71C x 2	FCQHG71F x 2	FCQQG71F x 2
Cooling	3.81	3.59	3.75	3.35	3.94	4.11

TRIPLE	FHQ50CB x 3	FBQ50D x 3	FDXS50F9 x 3	FFQ50C x 3	FCQG50F x 3
Cooling	4.25	3.75	4.26	4.15	4.12
DOUBLE TWIN	FHQ35CB x 4	FBQ35D x 4	FDXS35F x 4	FFQ35C x 4	FCQG35F x 4
Cooling	4.23	3.75	5.38	3.83	4.18

Notes

- The ratings shown are net capacities and include a deduction for indoor fan motor heat.
 - The capacities are based on the following conditions:
 - > Outdoor air: 85% RH
 - > Corresponding refrigerant piping length: 5.0 m
 - > Level difference: 0m
 - CPI is a percentage value compared to the rated value of 1.00
 - For infrastructure cooling applications, it is recommended to use remote controller setting 16(26)-2-03
 - The error rate for this value is less than 5% and depends on the indoor unit type
 - The rated power inputs (PI) for each model are listed in the table above


Efficient cooling

Wide operating range

Leader
in air
conditioning

Because infrastructure cooling systems must perform continuous cooling operations and may be required to run in demanding outdoor conditions, a flexible operating temperature map is critical. Daikin Sky Air infrastructure cooling systems offer reliable performance during extreme conditions.

- Outdoor cooling operation down to -15°C Ta
- Continuous cooling operation in outdoor temperatures as high as 50°C
- Extended indoor operation range from 12°C to 11°C Wet Bulb allows the indoor unit to operate at lower humidity

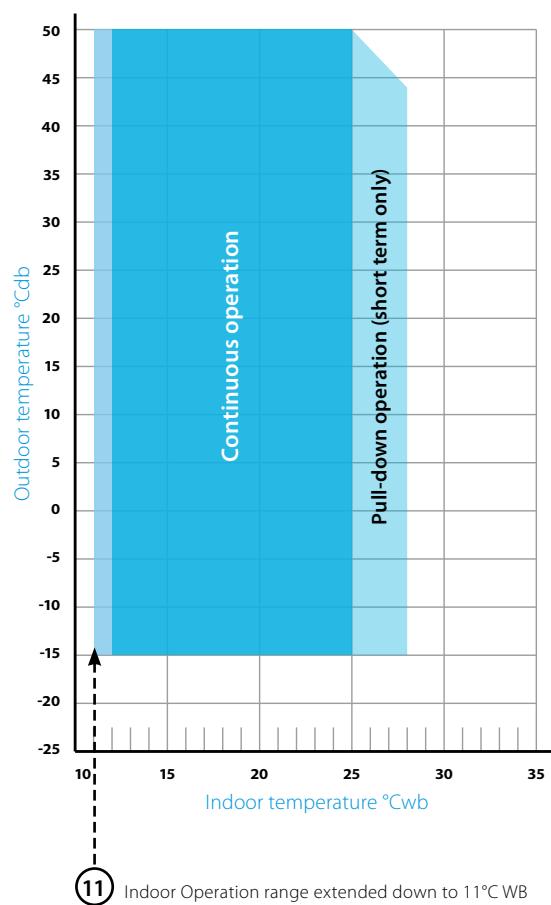

Cooling operation

Infrastructure cooling applications have minimal relative humidity, which results in a low indoor Wet Bulb temperature. The units may operate close to, or just outside, their official operating range. Sky Air Seasonal Smart can be set to widen the indoor cooling operation range down to 11°C Wet Bulb temperature.


Typical IT or infrastructure room

Set point: 20°C
Humidity: 30% RH
Indoor Wet Bulb temperature: 11°CWB

By setting the controller from factory default 16 (26) - 2 - 01 to infrastructure cooling 16 (26) - 2 - 03, the indoor operation range increases from 12°C to 11°C Wet Bulb.

Free cooling

Lower energy consumption

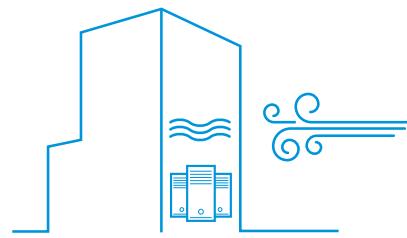

Ensuring continual uptime for infrastructure cooling applications comes at the cost of higher energy consumption than in comfort cooling applications. Daikin Sky Air infrastructure cooling systems offer you a leading solution for year-round efficiency, while decreasing your running costs.


The energy savings potential of operating in free cooling mode in certain climates is an attractive proposition for continuous cooling environments.

Operating in free cooling mode saves energy by using outdoor air during colder months, which allows refrigerant-based cooling components such as compressors to be shut off or to operate at a reduced capacity.

Daikin Sky Air Seasonal Smart single phase outdoor series provides a control signal that is intelligently based on:

- › The indoor set temperature
- › The actual indoor temperature
- › The outdoor temperature

Typical Server room installation with a free cooling unit

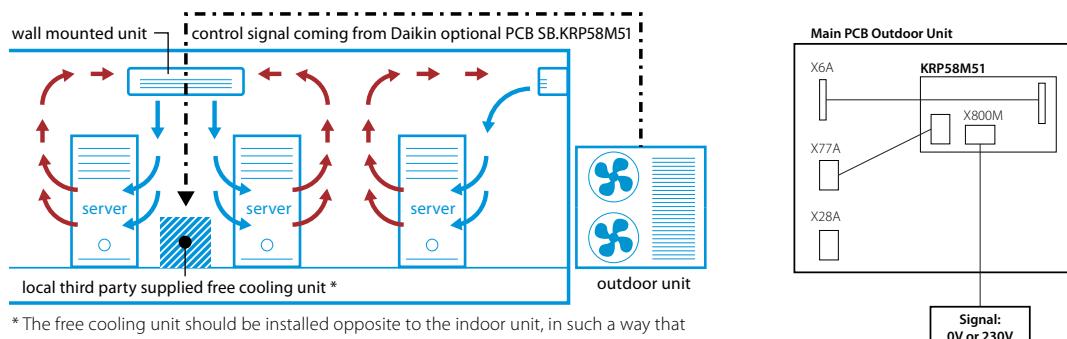

* The free cooling unit should be installed opposite to the indoor unit, in such a way that there is no recirculation of cold air blowing from the free cooling unit.

With the free cooling 230 V signal supplied through optional control board SB.KRP58M51 **available only for RZQG single phase outdoor systems**, you can control a field supplied free cooling unit.

Daikin UK recommends outdoor unit setting 2-53-02. It is important to make setting 26-7-02 in case of the use of free cooling. This to guarantee that the free cooling will start up before the outdoor unit.

Energy efficiency benefits from free cooling

Estimated Annual Savings Potential for a typical small IT room operating 24/7/365

Boosted capacity indoor unit: FHQ100C, outdoor unit: RZQG-L7V1

- | | |
|------------------------|--|
| › Cooling load: 6.8 kW | › RH indoor: 30% |
| › Set point: 20°C | › Free cooling if $\Delta T_a > 5^\circ\text{C}$ |
- ΔT_a = difference between indoor and outdoor temperature

AIR FLOW (M³/H)	ESTIMATED ANNUAL SAVINGS (EURO)				
	United Kingdom London	Germany Berlin	Poland Warsaw	Austria Vienna	Czech Republic Prague
500	212	275	158	142	185
1000	376	458	267	256	318
1500	436	516	307	313	370
2000	464	550	325	342	392

The savings depend greatly on climate, (ΔT_a), air flow volume and local electricity prices

Flexible control

Flexible and reliable operation of the IT, server or data support infrastructure requires a scalable and redundant cooling infrastructure. Operators of infrastructure cooling environments also need easy means of controlling and pre-programming the cooling systems. Daikin UK's Sky Air solution for infrastructure cooling offers control choices to address the most demanding operational needs.


Standard integrated duty rotation and standby control

Standard control solution for most installations

1. Add **redundancy** for critical IT applications
2. Increase **lifetime** of the system by altering operating units
3. **Back-up** operation: If one unit fails, the other unit will automatically start.

- › Duty rotation: After a certain period* of time, the operating unit will go in standby and the standby unit will take over.
* **Rotation interval can be set from 6h, 12h, 24h, 72h, 96h, weekly**
- › Possibility to lock on/off and lock the mode button on the Remote Controller
- › Possibility to limit the setpoint range

Integrated Duty/Standby control

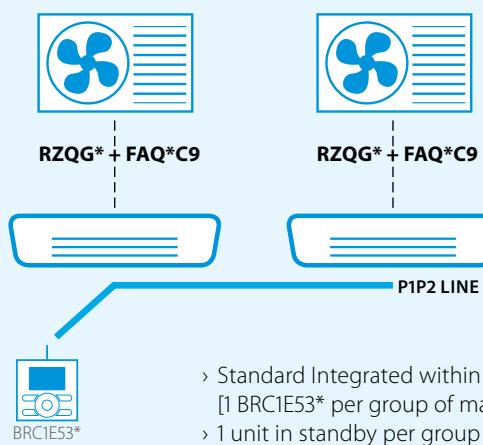

- › Standard Integrated within BRC1E53*
 - [1 BRC1E53* per group of max 16 systems]
 - > 1 unit in standby per group of max 16




BRC1E53

Duty rotation compatibility	Modelname
Wired remote control	BRC1E53*
Concealed ceiling system	FBQ-D*
Wall mounted system	FAQ-C9*
Ceiling suspended system	FHQ-CB*




Application Example

SYSTEM 1 FBQ140D IN OPERATION
SYSTEM 2 FBQ140D STANDBY

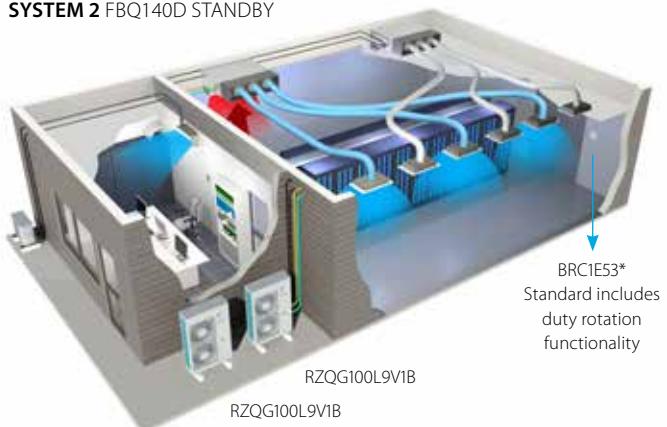

SYSTEM 1 FBQ140D STANDBY
SYSTEM 2 FBQ140D IN OPERATION

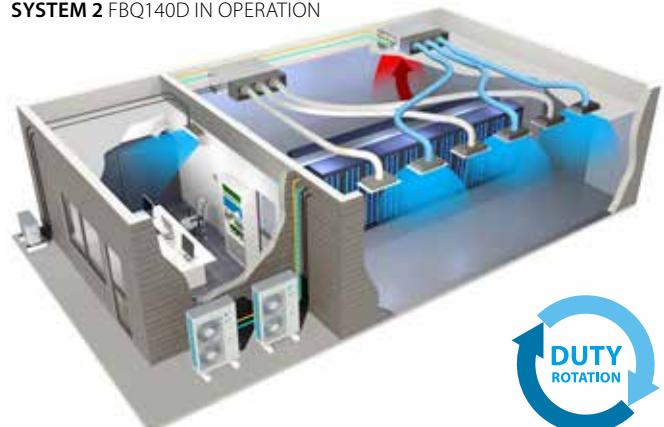


Maximum reliability and flexibility
for continuous operation

Advanced and scalable control


Modbus gateway RTD-10 option

- › **Automatic control** of indoor temperature
- › **Guaranteed cooling operation mode**
- › **Backup operation:**
 - › If one unit fails, the other unit will automatically take over
 - › When the temperature overshoots the standby unit will start operating
- › **Duty rotation:** after a certain period of time, the operating unit will go into standby mode and the standby unit will take over
- › **Rotation interval** can be set for 1 day, 1 week, 2 weeks or 4 weeks
- › **Remote alarm signal**



Wiring scheme


RZQG71L9V1 + FAQ100C9 RZQG71L9V1 + FAQ100C9

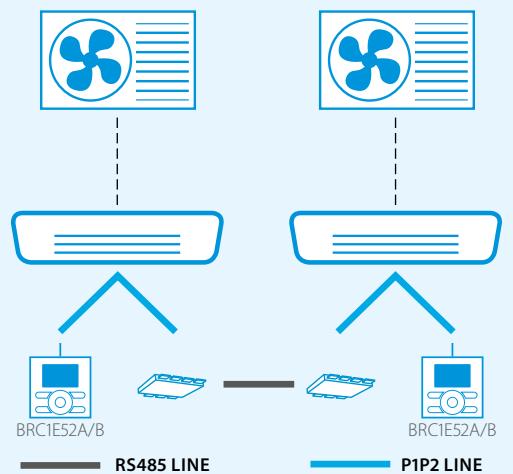

Example: 2 operating units, 2 standby units


Dedicated duty / standby control

- › RTD-10
 - [1 gateway for 1 indoor unit (group)]
- › Up to 8 RTD-10 units can be combined in RS485 network
- › 1 or 2 standby units per group

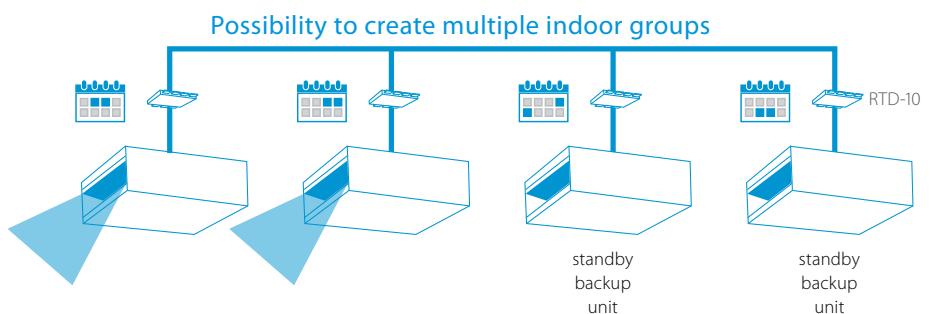

Backup operation

The failure of a unit initiates a safety procedure where the standby backup unit takes over automatically and a repair alarm is sent.

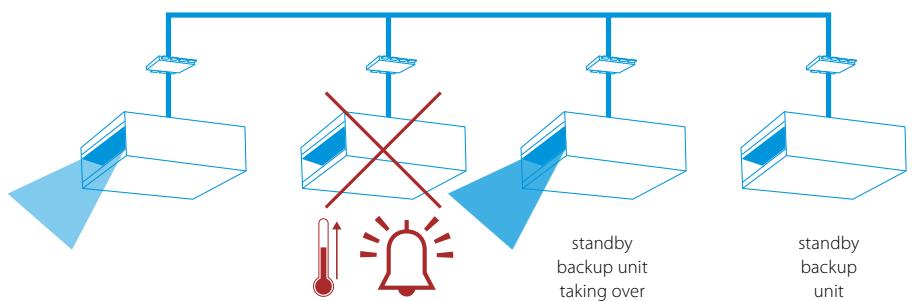



Dedicated field settings

adapted to the specific needs of infrastructure cooling

Overview of all settings

Function	Description	Setting	Where	Note
Field settings	Infrastructure Cooling Setting (EDP)	Low Humidity application	16(26)-2-03	Indoor Unit - Remote Controller Continuous cooling operation for low humidity applications
	EDP Setting + Avoid unit OFF time	Slow Start + Increased Hysteresis	16(26)-7-02	Indoor Unit - Remote Controller Only on Single Phase outdoor units
	Maximize airflow	Set airflow high + ceiling soiling prevention	13(23)-0-03	Indoor Unit - Remote Controller All indoor units except FAQ
	Free cooling	To set optimal unit start in free cooling mode	2-53-02	Outdoor unit – PCB setting Only on Single Phase outdoor units

Function	Option	Note
Backup operation, Duty Rotation, Additional unit comes in to deliver capacity, Visual Alarm Signal, I/O BMS connection - Forced On/Off operation + Alarm Monitoring	RTD-10	High end solution up to 8 indoors (1 per indoor unit)
Backup operation, Duty Rotation, I/O BMS connection - Forced On/Off operation, Sequential start control, Minimum Guaranteed units for Operation	DTA113B51	Basic solution up to 4 indoors (1 per group of 4 indoors)
Free cooling	SB.KRP58M51	Only for single phase units (including the mounting plate to install KRP* on single phase outdoor models)
Above-mentioned+ mini-BMS connection and energy management	DCM601A51	iTM solution

Continuous cooling operation

Avoid downtimes with specific system settings:

In low humidity environments, indoor unit freeze-up is less likely. The setting 16(26)-2-03 allows you to boost the indoor capacity and enables quick restart conditions in case of freeze-up prevention.

**Daikin UK recommends enabling
16(26)-2-03 for infrastructure
cooling applications**

Built-in settings for improved operational reliability

When using standard AC systems for infrastructure cooling, frequent start / stop cycles of the compressor can occur due to:

1. incorrect selection / sizing of equipment

- The typical solution:
- › Oversizing the air conditioning equipment to allow flexibility in server room occupancy
- › Oversizing by building in some spare, 'safety' capacity
- › Using rules of thumb as calculation method

2. installation/application related difficulties

- › Restricted air circulation
- › Blockage of air distribution from top blow server racks

Compressor and thermostat control are therefore optimized for infrastructure cooling

The new setting available on the Seasonal Smart* L9 single-phase series allows the outdoor system to gradually start. This prevents the outdoor system from going into thermo-off while still in start-up mode. This setting limits frequent on/off operation. By lowering the frequency of the compressor (and subsequently the capacity), the system modulates and avoids early thermo-off 16(26)-7-02 (setting).

ON/OFF differential prevents the output from making fast, continuous switches. Using the 16-7-02 setting activates a larger thermo on/off hysteresis to **enhance continuous operation**.

- 16 (26)-7-01: DEFAULT (Comfort cooling)
 - 16 (26)-7-02: enhanced slow start + increased hysteresis
- This setting must always be combined with the EDP setting 16(26)-2-03.


Best practices for planning and design

How to set-up cooling systems in server rooms


Flat floor or double floor not used for air distribution

Hot-aisle / Cold-aisle principles must be closely adhered to and the server orientation monitored.


With wall mounted units

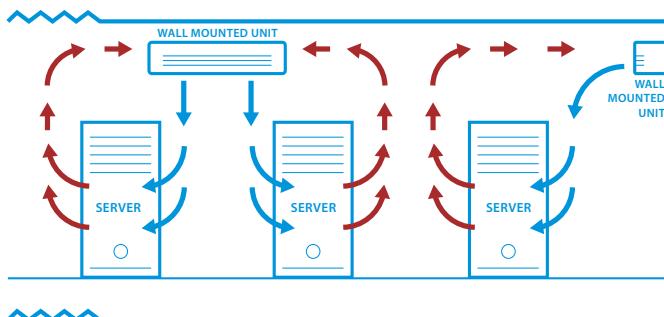

With ceiling suspended units

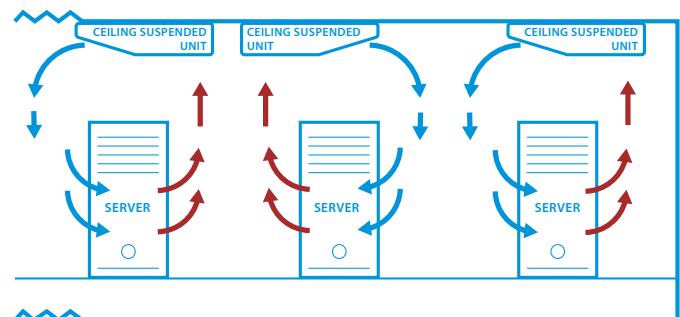


With concealed ceiling units

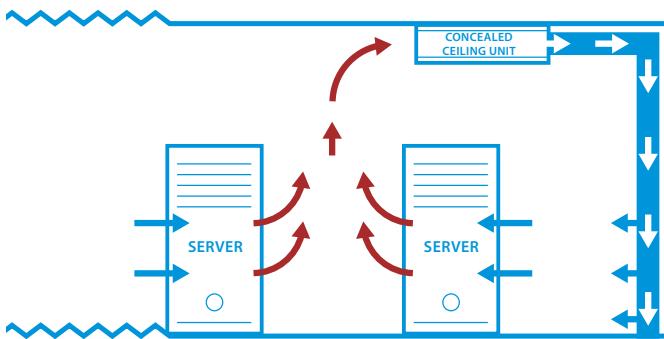


Install the ceiling suspended units in the opposite direction of the rack orientation

Flat floor or double floor used for air distribution

Hot-isle / Cold-isle set-up

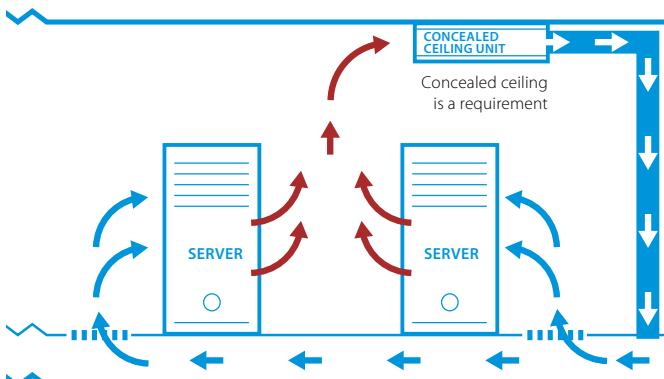

Throughflow racks

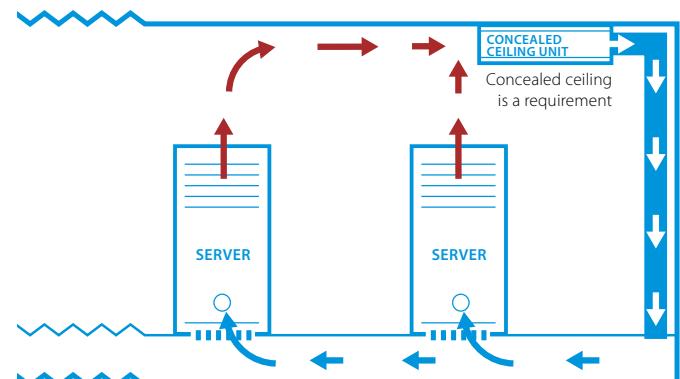

Best match for double floor server rooms with concealed ceiling units

Wall mounted unit

For rooms lacking false ceilings or free floor space

Combined with Seasonal Smart ensures best in class quality, efficiency and performance.

- › Suitable for air circulation for infrastructure cooling rooms (air suction is located at the top, where the hot air tends to be)
- › Long throw of air for optimal coverage
- › No floor occupancy
- › Air is equally distributed upwards and downwards due to five different discharge angles that are programmable via remote control
- › Maintenance operations are easily controlled from the front of the unit.



Efficiency data			FAQ + RZQG	100C9 + 71L9V1	71C9 + 71C9 + 100L9V1	71C9 + 71C9 + 125L9V1	100C9 + 71L8Y1	71C9 + 71C9 + 100L8Y1	71C9 + 71C9 + 125L8Y1	
 Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++	B		A++	B		
		Pdesign	kW	6.80	9.50	12.00	6.80	9.50	12.00	
		SEER		6.51	5.10		6.51	5.10		
	Heating (Average climate)	Annual energy consumption	kWh	366	652	824	366	652	824	
		Energy label		A+	A		A+	A		
		Pdesign	kW	6.33	11.30	12.71	6.33	11.30	12.71	
 Sound power level	Cooling	SCOP		4.02	3.80		4.02	3.80		
		Annual energy consumption	kWh	2,205	4,164	4,683	2,205	4,164	4,683	
		dBA		61			65			
	Heating	dBA		61			65			
		High/Nom./Low	m³/min	18/16/14			26/23/19			
		High/Nom./Low	m³/min	18/16/14			26/23/19			
 Sound pressure level	Cooling	dBA		61			65			
		High/Nom./Low	dBA	45/42/40			49/45/41			
		High/Nom./Low	dBA	45/42/40			49/45/41			
	Heating	dBA		45/42/40			49/45/41			
		High/Nom./Low	dBA	45/42/40			49/45/41			
		High/Nom./Low	dBA	45/42/40			49/45/41			
 Control systems	Infrared remote control						BRC7EB518			
	Wired remote control						BRC1D52 / BRC1E52A/B			
	Power supply	Phase / Frequency / Voltage	Hz / V				1~ / 50/60 / 220-240/220			
	Indoor unit			FAQ	71C9		100C9			
	Casing	Colour				Fresh White				
	Dimensions	Unit	HeightxWidthxDepth	mm	290x1,050x238		340x1,200x240			
 Weight	Unit				13		17			
	Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	18/16/14		26/23/19			
	Heating	High/Nom./Low	m³/min	18/16/14			26/23/19			
	Sound power level	Cooling	dBA		61		65			
	Heating	dBA		61			65			
	Sound pressure level	Cooling	High/Nom./Low	dBA	45/42/40		49/45/41			
 Sound pressure level	Heating	High/Nom./Low	dBA	45/42/40			49/45/41			
	Control systems	Infrared remote control					BRC7EB518			
	Wired remote control						BRC1D52 / BRC1E52A/B			
	Power supply	Phase / Frequency / Voltage	Hz / V				1~ / 50/60 / 220-240/220			
	Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	71L8Y1	100L8Y1	125L8Y1
	Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320	990x940x320	1,430x940x320		
 Weight	Unit				69	95	80		101	
	Sound power level	Cooling	dBA		64	66	67	64	66	67
	Sound pressure level	Cooling	Nom.	dBA	48	50	51	48	50	51
	Heating	Nom.	dBA		50	52	53	50	52	53
	Night quiet mode	Level 1	dBA		43	45		43		45
	Operation range	Cooling	Ambient	Min.-Max.	°CDB		-15~50			
 Refrigerant	Heating	Ambient	Min.-Max.	°CWB			-20~15.5			
	Type/Charge/GWP			kg/TCO ₂ eq	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5		
	Piping connections	Liquid	OD	mm			9.52			
		Gas	OD	mm			15.9			
	Piping length	OU - IU	Max.	m	50	75		50		75
		System	Equivalent	m	70	90		70		90
 Additional refrigerant charge		Chargeless	m				30			
		Additional refrigerant charge	kg/m				See installation manual			
	Level difference	IU - OU	Max.	m			30.0			
		IU - IU	Max.	m			0.5			
	Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240			3N~ / 50 / 380-415		
	Current - 50Hz	Maximum fuse amps (MFA)	A		-			16	20	25


Contains fluorinated greenhouse gases

Ceiling suspended unit

For wide rooms lacking false ceilings nor free floor space

Combination with Seasonal Smart ensures best in class quality, highest efficiency and performance

- > Perfect air distribution for wide rooms due to the Coanda effect: up to 100° discharge angle
- > Rooms with ceilings up to 3.8m can be cooled easily and without capacity loss
- > No floor occupancy
- > Can be mounted in corners and narrow spaces, because it only requires 30mm of lateral service space
- > Stylish unit blends in with any interior.
- > No adapter needed for Dlll-connection; link your unit into the wider building management system.



Efficiency data			FHQ + RZQG	50CB + 50CB + 71L9V1	100CB + 71L9V1	35CB + 35CB + 35CB + 71L9V1	140CB + 100L9V1	71CB + 71CB + 100L9V1	71CB + 71CB + 125L9V1	50CB + 50CB + 50CB + 100L9V1	35CB + 35CB + 35CB + 100L9V1	140CB + 125L9V1	50CB + 50CB + 50CB + 125L9V1	35CB + 35CB + 35CB + 125L9V1															
 Seasonal efficiency (according to EN14825)	Cooling	Pdesign	kW	6.80			9.50			12.00			9.50		12.00														
		SEER		5.10	6.95	5.10	6.11			5.10			6.01	5.10															
		Annual energy consumption	kWh	467	343	467	545	652	824		652		699	824															
	Heating (Average climate)	Pdesign	kW	6.00	7.60	6.00	11.30			12.71		11.30	14.13	12.71															
		SCOP		3.80	4.32	3.80	4.61			3.80			4.23	3.80															
		Annual energy consumption	kWh	2,211	2,463	2,211	3,432	4,164	4,683		4,164		4,677	4,683															
Efficiency data			FHQ + RZQG	50CB + 50CB + 71L8Y1	100CB + 71L8Y1	35CB + 35CB + 35CB + 71L8Y1	140CB + 100L8Y1	71CB + 71CB + 100L8Y1	71CB + 71CB + 125L8Y1	50CB + 50CB + 50CB + 100L8Y1	35CB + 35CB + 35CB + 100L8Y1	140CB + 125L8Y1	50CB + 50CB + 50CB + 125L8Y1	35CB + 35CB + 35CB + 125L8Y1															
 Seasonal efficiency (according to EN14825)	Cooling	Pdesign	kW	6.80			9.50			12.00			9.50		12.00														
		SEER		5.10	6.95	5.10	6.11			5.10			6.01	5.10															
		Annual energy consumption	kWh	467	343	467	545	652	824		652		699	824															
	Heating (Average climate)	Pdesign	kW	6.00	7.60	6.00	11.30			12.71		11.30	14.13	12.71															
		SCOP		3.80	4.32	3.80	4.61			3.80			4.23	3.80															
		Annual energy consumption	kWh	2,211	2,463	2,211	3,432	4,164	4,683		4,164		4,677	4,683															
Indoor unit			FHQ	35CB		50CB		71CB		100CB		140CB																	
Dimensions	Unit	HeightxWidthxDepth	mm	235x960x690				235x1,270x690				235x1,590x690																	
Weight	Unit		kg	24		25		32		38																			
Air filter	Type			Resin net with mold resistance																									
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	14/11.5/10		15/12/10		20.5/17/14		28/24/20		34/29/24																	
	Heating	High/Nom./Low	m³/min	14/11.5/10		15/12/10		20.5/17/14		28/24/20		34/29/24																	
Sound power level	Cooling		dBA	53		54		55		60		64																	
	Heating		dBA	53		54		55		60		64																	
Sound pressure level	Cooling	High/Nom./Low	dBA	36/34/31		37/35/32		38/36/34		42/38/34		46/42/38																	
	Heating	High/Nom./Low	dBA	36/34/31		37/35/32		38/36/34		42/38/34		46/42/38																	
Control systems	Infrared remote control			BRC7G53																									
	Wired remote control			BRC1D52 / BRC1E52A/B																									
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50/60 / 220-240/220																									
Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	140L9V1	71L8Y1	100L8Y1	125L8Y1	140LY1																		
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320																			
Weight	Unit		kg	77		99		80		101																			
Sound power level	Cooling		dBA	64		66		67		69		64		66		67		69											
	Sound pressure level	Nom.	dBA	48		50		51		52		48		50		51		52											
Operation range	Cooling	Min.-Max.	°CDB	-15~50																									
	Heating	Min.-Max.	°CWB	-20~15.5																									
Refrigerant	Type/Charge/GWP	kg	R-410A / 29 / 2,087.5	R-410A / 4 / 2,087.5		R-410A / 29 / 2,087.5		R-410A / 4 / 2,087.5		R-410A / 4 / 2,087.5																			
	Charge	TCO Eq	6.1	8.4		6.1		8.4		6.1		8.4																	
Piping connections	Liquid	OD	mm	9.52																									
	Gas	OD	mm	15.9																									
Piping length	OU - IU	Max.	m	50		75		50		75																			
	System	Equivalent Chargeless	m	70		90		70		90																			
				30																									
				See installation manual																									
Level difference	IU - OU	Max.	m	30.0																									
	IU - IU	Max.	m	0.5																									
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240		1~ / 50 / 220-240		3N~ / 50 / 380-415		3N~ / 50 / 380-415																			
Current - 50Hz	Maximum fuse amps (MFA)	A		-		16		16		25																			

Contains fluorinated greenhouse gases

Concealed ceiling unit with medium ESP

Combination with Seasonal Smart ensures best in class quality, and high efficiency and performance

- › Top efficiency in market
- › Compact unit can easily be mounted in a ceiling of only 285mm, leaving only suction and discharge grilles visible
- › Sound levels lower than 29 dBA
- › Medium external static pressure up to 150Pa allows the use of flexible ducts with varying lengths
- › No adapter needed for Dlll-connection; link your unit into the wider building management system
- › Flexible installation, the air suction direction can be altered from rear to bottom suction
- › Standard built-in drain pump increases flexibility and installation speed
- › No floor occupancy



Efficiency data			FBQ + RZQG	100D + 71L9V1	50D + 50D + 71L9V1	35D + 35D + 35D + 71L9V1	140D + 100L9V1	71D + 71D + 100L9V1	35D + 35D + 35D + 100L9V1	50D + 50D + 50D + 100L9V1	50D + 50D + 50D + 125L9V1	35D + 35D + 35D + 125L9V1	140D + 125L9V1	71D + 71D + 125L9V1
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++	A		A+		A		A		A++	A
		Pdesign	kW		6.80				9.50				12.00	
		SEER		6.16	5.10		5.87			5.10			6.11	5.10
	Heating (Average climate)	Annual energy consumption	kWh	386	466		566		652		824		687	824
		Energy label		A+	A		A++			A			A+	A
		Pdesign	kW		6.00				11.30			12.71	12.70	12.71
Seasonal efficiency (according to EN14825)	Heating (Average climate)	SCOP		4.31	3.80		4.78			3.80			4.28	3.80
		Annual energy consumption	kWh	1,949	2,210		3,310		4,163		4,683		4,154	4,683

Efficiency data			FBQ + RZQG	100D + 71L8Y1	50D + 50D + 71L8Y1	35D + 35D + 35D + 71L8Y1	140D + 100L8Y1	71D + 71D + 100L8Y1	35D + 35D + 35D + 100L8Y1	50D + 50D + 50D + 100L8Y1	50D + 50D + 50D + 125L8Y1	35D + 35D + 35D + 125L8Y1	140D + 125L8Y1	71D + 71D + 125L8Y1
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++	A		A+		A		A		A++	A
		Pdesign	kW		6.80				9.50				12.00	
		SEER		6.16	5.10		5.87			5.10			6.11	5.10
	Heating (Average climate)	Annual energy consumption	kWh	386	466		566		652		824		687	824
		Energy label		A+	A		A++			A			A+	A
		Pdesign	kW		6.00				11.30			12.71	12.70	12.71
Seasonal efficiency (according to EN14825)	Heating (Average climate)	SCOP		4.31	3.80		4.78			3.80			4.28	3.80
		Annual energy consumption	kWh	1,949	2,210		3,310		4,163		4,683		4,154	4,683

Indoor unit			FBQ	35D	50D	71D	100D	140D
Dimensions	Unit	HeightxWidthxDepth	mm	245x700x800		245x1,000x800		245x1,400x800
Weight	Unit		kg	28	35	46		
Air filter	Type			Resin net with mold resistance				
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	15/12.5/10.5		18/15/12.5		29/26/23
	Heating	High/Nom./Low	m³/min	15/12.5/10.5		18/15/12.5		34/29/23.5
Fan - External static pressure	High/Nom./Maximum available/High		Pa	150/30/-		150/40/-		150/50/-
Sound power level	Cooling	High/Nom./Low	dBA	60	56	58	62	
Sound pressure level	Cooling	High/Nom./Low	dBA	35/32/29	30/28/25	34/32/30	37/35/32	
	Heating	High/Nom./Low	dBA	37/34/29	31/28/25	36/33/30	38/35/32	
Control systems	Infrared remote control			BRC4C65				
	Wired remote control			BRC1E52A/B / BRC1D528				
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240				

Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	140L9V1	71L8Y1	100L8Y1	125L8Y1	140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320	1,430x940x320	990x940x320		1,430x940x320			
Weight	Unit		kg	77	99	80	101				
Sound power level	Cooling		dBA	64	66	67	69	64	66	67	69
Sound pressure level	Cooling	Nom.	dBA	48	50	51	52	48	50	51	52
	Heating	Nom.	dBA	50	52	53	50	52	52	53	
	Night quiet mode	Level 1	dBA	43		45		43		45	
Operation range	Cooling	Ambient	Min.~Max.					-15~50			
	Heating	Ambient	Min.~Max.					-20~15.5			
Refrigerant	Type/Charge/GWP		kg	R-410A / 29 / 2,087.5	R-410A / 4 / 2,087.5	R-410A / 29 / 2,087.5		R-410A / 4 / 2,087.5			
Charge			TCO ₂ Eq	6.1	8.4		6.1		8.4		
Piping connections	Liquid	OD					9.52				
	Gas	OD					15.9				
	Piping length	OU - IU	Max.	m	50	75		50		75	
		System	Equivalent Chargeless	m	70	90		70		90	
							30				
	Additional refrigerant charge		kg/m					See installation manual			
Level difference	IU - OU	Max.	m					30.0			
	IU - IU	Max.	m					0.5			
Power supply	Phase / Frequency / Voltage		Hz / V	1~ / 50 / 220-240				3N~ / 50 / 380-415			
Current - 50Hz	Maximum fuse amps (MFA)		A		-			16		25	

Contains fluorinated greenhouse gases

4-way blow ceiling suspended unit

Unique Daikin unit for rooms with high ceilings that lack false ceilings or free floor space

Combination with Seasonal Smart ensures best in class quality, highest efficiency and performance.

- › Rooms with ceilings up to 3.5m can be cooled easily without capacity loss
- › Can be installed in both new and refurbishment projects
- › Flexibility to suit every room layout without changing the location of the unit. The wired remote controller allows you to control and close each flap individually.
- › Reduced energy consumption as a result of the specially developed small tube heat exchanger, DC fan motor and drain pump
- › Stylish unit blends in with any interior.
- › Five different discharge angles between 0° and 60°can be programmed via remote control



- › Standard drain pump with 500mm lift increases flexibility and installation speed
- › No adapter needed for Dlll-connection; link your unit into the wider building management system.

Efficiency data		FUQ + RZQG	100C + 71L9V1	71C + 71C + 100L9V1	71C + 71C + 125L9V1	100C + 71L8Y1	71C + 71C + 100L8Y1	71C + 71C + 125L8Y1
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++	B	6.80	9.50	12.00	6.80
		Pdesign kW	6.80	9.50	5.10	6.50	9.50	12.00
		SEER	6.50			6.50		5.10
		Annual energy consumption kWh	367	652	824	367	652	824
	Heating (Average climate)	Energy label	A+	A	7.60	11.30	12.71	7.60
		Pdesign kW	7.60	11.30	4.20	3.80	11.30	12.71
		SCOP				4.20		3.80
		Annual energy consumption kWh	2,534	4,164	4,683	2,534	4,164	4,683

Indoor unit		FUQ	71C	100C
Casing	Colour	Fresh White		
Dimensions	Unit	HeightxWidthxDepth mm	198x950x950	
Weight	Unit	kg	25	26
Air filter	Type	Resin net with mold resistance		
Fan - Air flow rate	Cooling	High/Nom./Low m³/min	23/19.5/16	31/25.5/20
	Heating	High/Nom./Low m³/min	23/19.5/16	31/25.5/20
Sound power level	Cooling	dBA	59	64
	Heating	dBA	59	64
Sound pressure level	Cooling	High/Nom./Low dBA	41/38/35	46/42/39
	Heating	High/Nom./Low dBA	41/38/35	46/42/39
Control systems	Infrared remote control		BRC7C58	
	Wired remote control		BRC1D52	
Power supply	Phase / Frequency / Voltage	Hz / V	1~/50/60 / 220-	

Outdoor unit		RZQG	71L9V1	100L9V1	125L9V1	71L8Y1	100L8Y1	125L8Y1
Dimensions	Unit	HeightxWidthxDepth mm	990x940x320	1,430x940x320	990x940x320	1,430x940x320		
Weight	Unit	kg	69	95	80		101	
Sound power level	Cooling	dBA	64	66	67	64	66	67
Sound pressure level	Cooling Nom.	dBA	48	50	51	48	50	51
	Heating Nom.	dBA	50	52	53	50	52	53
	Night quiet mode Level 1	dBA	43	45		43		45
Operation range	Cooling	Ambient Min.-Max. °CDB			-15~50			
	Heating	Ambient Min.-Max. °CWB			-20~15.5			
Refrigerant	Type/Charge/GWP	kg/TCO _{eq}	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5		
Piping connections	Liquid OD	mm			9.52			
	Gas OD	mm			15.9			
	Piping length OU - IU Max.	m	50	75	50	75		
	System Equivalent	m	70	90	70	90		
	Chargeless	m			30			
	Additional refrigerant charge kg/m				See installation manual			
	Level difference IU - OU Max.	m			30.0			
	IU - IU Max.	m			0.5			
Power supply	Phase / Frequency / Voltage	Hz / V	1~/50 / 220-240			3N~/50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)	A	-			16	20	25

Contains fluorinated greenhouse gases

Floor standing unit

For commercial spaces with high ceilings

Combination with Seasonal Smart ensures best in class quality, highest efficiency and performance.

- › Ideal solution for commercial spaces without or with narrow false ceilings
- › Easy installation in new and refurbishment projects
- › Very efficient for use in rooms with high ceilings
- › Decreases temperature variation with an automatic fan speed selection and freely selectable 3-step fan speed.
- › Selectable horizontal out blow better suits the layout of your room (via BRC1E52)
- › Reduced energy consumption due to specially developed DC fan motor
- › No adapter needed for DIII-connection; link your unit into the wider building management system.



Efficiency data			FVQ + RZQG	100C + 71L9V1	140C + 100L9V1	140C + 125L9V1	140C + 140L9V1	100C + 71L8Y1	140C + 100L8Y1	140C + 125L8Y1	140C + 140L8Y1
Seasonal efficiency (according to EN14825)	Cooling	Energy label	A++		A+		-	A++		A+	-
		Pdesign	kW	6.80	9.50	12.00	-	6.80	9.50	12.00	-
		SEER		6.31		5.61	-	6.31		5.61	-
	Annual energy consumption	kWh		378	593	749	-	378	593	749	-
Heating (Average climate)	Heating	Energy label	A+		A		-	A+		A	-
		Pdesign	kW	6.33		11.30	-	6.33		11.30	-
		SCOP		4.05	4.20	3.87	-	4.05	4.20	3.87	-
	Annual energy consumption	kWh		2,189	3,767	4,088	-	2,189	3,767	4,088	-
Indoor unit			FVQ	100C				140C			
Casing	Colour			Fresh White							
Dimensions	Unit	HeightxWidthxDepth	mm					1,850x600x350			
Weight	Unit		kg					47			
Air filter	Type			Resin net with mold resistance							
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	28/25/22				30/28/26			
	Heating	High/Nom./Low	m³/min	28/25/22				30/28/26			
Sound power level	Cooling		dBA	62				65			
	Heating		dBA	62				65			
Sound pressure level	Cooling	High/Nom./Low	dBA	50/47/44				53/51/48			
	Heating	High/Nom./Low	dBA	50/47/44				53/51/48			
Control systems	Wired remote control			BRC1D52 / BRC1E52A/B							
Power supply	Phase / Frequency / Voltage			Hz / V				1~/ 50/60 / 220-240/220			
Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	140L9V1	71L8Y1	100L8Y1	125L8Y1	140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320	
Weight	Unit		kg	77		99		80		101	
Sound power level	Cooling		dBA	64	66	67	69	64	66	67	69
Sound pressure level	Cooling	Nom.	dBA	48	50	51	52	48	50	51	52
	Heating	Nom.	dBA	50	52	53		50	52	53	
	Night quiet mode Level 1		dBA	43		45		43		45	
Operation range	Cooling	Ambient	Min.-Max.	°CDB	-15~50						
	Heating	Ambient	Min.-Max.	°CWB	-20~15.5						
Refrigerant	Type/Charge/GWP			kg	R-410A / 29 / 2,087.5		R-410A / 4 / 2,087.5		R-410A / 29 / 2,087.5		R-410A / 4 / 2,087.5
	Charge			TCO,Eq	6.1		8.4		6.1		8.4
Piping connections	Liquid	OD	mm		9.52						
	Gas	OD	mm		15.9						
	Piping length	OU - IU	Max.	m	50		75		50		75
		System	Equivalent	m	70		90		70		90
	Chargeless			m	30						
	Additional refrigerant charge			kg/m	See installation manual						
	Level difference	IU - OU	Max.	m	30.0						
		IU - IU	Max.	m	0.5						
Power supply	Phase / Frequency / Voltage			Hz / V	1~/ 50 / 220-240				3N~/ 50 / 380-415		
Current - 50Hz	Maximum fuse amps (MFA)			A	-				16	25	

Contains fluorinated greenhouse gases

Fully flat cassette

Unique design that integrates seamlessly into the ceiling

Combination with Seasonal Smart ensures best in class quality, highest efficiency and performance.

- › Fully flat integration in standard architectural ceiling tiles
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › Less energy consumption as a result of the specially developed small tube heat exchanger, DC fan motor and drain pump
- › Fresh air intake integrated in the same system reduces installation costs because additional ventilation is not required
- › Standard drain pump with 850mm lift increases flexibility and installation speed
- › No adapter needed for DIII-connection; link your unit into the wider building management system.



Efficiency data			FFQ + RZQG	35C + 35C + 35C +	50C + 50C + 50C +	35C + 35C + 35C +	50C + 50C + 50C +	35C + 35C + 35C +	50C + 50C + 50C +	35C + 35C + 35C +	50C + 50C + 50C +	35C + 35C + 35C +	50C + 50C + 50C +		
	Cooling	Energy label Pdesign SEER Annual energy consumption	kW	71L9V1	71L9V1	100L9V1	100L9V1	125L9V1	125L9V1	71L8Y1	71L8Y1	100L8Y1	100L8Y1	125L8Y1	125L8Y1
Seasonal efficiency (according to EN14825)												B			
		Pdesign	kW	6.80		9.50		12.00		6.80		9.50		12.00	
		SEER										5.10			
		Annual energy consumption	kWh	467		652		824		467		652		824	
	Heating (Average climate)	Energy label Pdesign SCOP Annual energy consumption	kWh	6.00		11.30		12.71		6.00		11.30		12.71	
												3.80			
		Pdesign	kWh	2,211		4,164		4,683		2,211		4,164		4,683	
		SCOP													
		Annual energy consumption	kWh												
Indoor unit			FFQ	35C				50C							
Dimensions	Unit	HeightxWidthxDepth	mm					260x575x575							
Weight	Unit		kg					16							
Decoration panel	Model							BYFQ60CW/ BYFQ60CS/ BYFQ60B3W1							
	Colour							White (N9.5)/ White (N9.5) + Silver/ White (RAL9010)							
Air filter	Dimensions	HeightxWidthxDepth	mm					46x620x620 / 46x620x620/ 55x700x700							
	Weight		kg					2.8/ 2.8/ 2.7							
Fan - Air flow rate			Type					Resin net with mold resistance							
Fan - Air flow rate			Cooling	High/Nom./Low	m³/min			10/8.5/6.5							
			Heating	High/Nom./Low	m³/min			10/8.5/6.5							
Sound power level			Cooling		dBA			51							
Sound pressure level			Cooling	High/Nom./Low	dBA			34/30.5/25							
			Heating	High/Nom./Low	dBA			34/30.5/25							
Control systems			Infrared remote control					BRC7EB530 (standard panel) / BRC7F530W (white panel) / BRC7F530S (grey panel)							
			Wired remote control					BRC1D52 / BRC1E52A/B							
Power supply			Phase / Frequency / Voltage	Hz / V				1~ / 50 / 220-240							
Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	71L8Y1	100L8Y1	125L8Y1						
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320					
Weight	Unit		kg	69		95		80		101					
Sound power level	Cooling		dBA	64		66		64		66					
	Sound pressure level	Nom.	dBA	48		50		48		50					
Operation range	Cooling	Nom.	dBA	50		52		50		52					
	Heating	Min.-Max.	°CDB	43		45		43		45					
Refrigerant			Type/Charge/GWP	kg/tCO ₂ eq	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5	R-410A/2.9/6.1/2,087.5	R-410A/4.0/8.4/2,087.5							
Piping connections	Liquid	OD	mm							9.52					
	Gas	OD	mm							15.9					
Piping length	OU - IU	Max.	m	50		75		50		75					
	System	Equivalent	m	70		90		70		90					
Additional refrigerant charge		Chargeless	m							30					
			kg/m							See installation manual					
	IU - OU	Max.	m							30.0					
Level difference			IU - IU	Max.	m					0.5					
Power supply	Phase / Frequency / Voltage	Hz / V		1~ / 50 / 220-240				3N~ / 50 / 380-415							
Current - 50Hz	Maximum fuse amps (MFA)	A		-				16		20		25			

Dimensions do not include control box | Contains fluorinated greenhouse gases

High COP, round flow cassette

360° air discharge for optimum efficiency and comfort

Combination with Seasonal Smart ensures best in class quality, highest efficiency and performance.

- › High COP cassette provides top performance, great savings in energy consumption
- › 360° air discharge ensures uniform air flow and temperature distribution
- › Daily automatic filter cleaning yields higher efficiency and lower maintenance costs. Dust can easily be removed with a vacuum cleaner, without opening the unit
- › Flexibility to suit every room layout without changing the location of the unit. The wired remote controller allows you to control and close each flap individually.



Efficiency data			FCQHG + RZQG	100F + 71L9V1	140F + 100L9V1	140F + 125L9V1	140F + 140L9V1	100F + 71L8Y1	140F + 100L8Y1	140F + 125L8Y1	140F + 140L8Y1	71F + 71F + 100L9V1	71F + 71F + 125L9V1	71F + 71F + 100L8Y1	71F + 71F + 125L8Y1
Seasonal efficiency (according to EN14825)	Cooling	Energy label		A++			-		A++			B			
	Pdesign	kW	6.80	9.50	12.00	-	-	6.80	9.50	12.00	-	9.50	12.00	9.50	12.00
	SEER		7.00		6.61	-	-	7.00		6.61	-			5.10	
	Annual energy consumption	kWh	340	475	636	-	-	340	475	636	-	652	824	652	824
Heating (Average climate)	Energy label		A+	A++		-	-	A+	A++			A			
	Pdesign	kW	7.60	11.30	12.66	-	-	7.60	11.30	12.66	-	11.30	12.71	11.30	12.71
	SCOP		4.54	4.80	4.63	-	-	4.54	4.80	4.63	-			3.80	
	Annual energy consumption	kWh	2,344	3,296	3,829	-	-	2,344	3,296	3,829	-	4,164	4,683	4,164	4,683

Indoor unit			FCQHG	71F			100F			140F		
Dimensions	Unit	HeightxWidthxDepth	mm				288x840x840					
Weight	Unit		kg		25			26				
Decoration panel	Model			BYCQ140D7W1 - white with grey louvers/BYCQ140D7W1W - full white/BYCQ140D7GW1 - auto cleaning panel								
	Colour			Pure White (RAL 9010)/Pure White (RAL 9010)/Pure White (RAL 9010)								
Dimensions	HeightxWidthxDepth	mm		50x950x950/50x950x950/130x950x950								
Weight		kg		5.4/5.4/10.3								
Air filter	Type			Resin net with mold resistance								
Fan - Air flow rate	Cooling	High/Nom./Low	m³/min	21.2/16.7/12.2			32.3/25.7/19.0			33.5/27.3/21.1		
	Heating	High/Nom./Low	m³/min	21.2/16.7/12.2			32.3/25.7/19.0			33.5/27.3/21.1		
Sound power level	Cooling		dBA	53			61			61		
	Heating		dBA	53			61			61		
Sound pressure level	Cooling	High/Nom./Low	dBA	36/33/29			44/39/33			45/41/37		
	Heating	High/Nom./Low	dBA	36/33/29			44/39/33			45/41/37		
Control systems	Infrared remote control			BRC7FA532F								
	Wired remote control			BRC1D52 / BRC1E52A/B								
Power supply	Phase / Frequency / Voltage	Hz / V		1~/50~/220-240								

Outdoor unit			RZQG	71L9V1	100L9V1	125L9V1	140L9V1	71L8Y1	100L8Y1	125L8Y1	140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		1,430x940x320		990x940x320		1,430x940x320	
Weight	Unit		kg	77		99		80		101	
Sound power level	Cooling		dBA	64	66	67	69	64	66	67	69
Sound pressure level	Cooling	Nom.	dBA	48	50	51	52	48	50	51	52
	Heating	Nom.	dBA	50	52		53	50	52		53
	Night quiet mode	Level 1	dBA	43		45		43		45	
Operation range	Cooling	Ambient	Min.-Max. °CDB					-15~50			
	Heating	Ambient	Min.-Max. °CWB					-20~15.5			
Refrigerant	Type/Charge/GWP	kg	R-410A/29.2/2,087.5		R-410A / 4 / 2,087.5		R-410A/29.2/2,087.5		R-410A / 4 / 2,087.5		
	Charge	TCO,Eq	6.1		8.4		6.1		8.4		
Piping connections	Liquid OD	mm					9.52				
	Gas OD	mm					15.9				
	Piping length	OU - IU	Max. m	50		75		50		75	
		System	Equivalent m	70		90		70		90	
		Chargeless	m				30				
	Additional refrigerant charge	kg/m					See installation manual				
	Level	IU - OU	Max. m				30.0				
	difference	IU - IU	Max. m				0.5				
Power supply	Phase / Frequency / Voltage	Hz / V		1~/50~/220-240				3N~/50~/380-415			
Current - 50Hz	Maximum fuse amps (MFA)	A		-				16			25

The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to high levels of dirt. | BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel. | Contains fluorinated greenhouse gases

Pair, Twin, Triple, Double Twin

Industry leading technology for commercial applications and infrastructure cooling

› Best in class efficiency:

- compressor that offers substantial energy savings
 - control logic that optimises efficiency for the most frequently encountered operating conditions and auxiliary modes (when the unit is not active)
 - heat exchangers that optimise the refrigerant flow at the most frequent operating conditions (temperature and load)
- › Variable Refrigerant Temperature: top seasonal efficiency throughout the year and quick reaction speed to deliver required cooling capacity in hot temperatures



› Re-use of existing pipework of R-22 or R-407C systems



- › Reliable cooling is guaranteed with gas cooled PCB because it is not influenced by ambient temperatures
- › Maximum piping length of 75m, minimum piping length of 5m



RZQG100-125-140L9V1/L(8)Y1



- › Daikin outdoor units are neat, sturdy and can easily be mounted on a roof or terrace, or placed against an outside wall
- › Compatible with D-BACS
- › Possible for integration in BMS systems.

Outdoor unit	RZQG	71L9V1	100L9V1	125L9V1	140L9V1	71L8Y1	100L8Y1	125L8Y1	140LY1
Dimensions	Unit	HeightxWidthxDepth	mm	990x940x320		990x940x320		1,430x940x320	
Weight	Unit		kg	77		99	80		101
Sound power level	Cooling		dBA	64	66	67	69	64	66
Sound pressure level	Cooling	Nom.	dBA	48	50	51	52	48	50
	Heating	Nom.	dBA	50	52	53	50	52	53
	Night quiet mode	Level 1	dBA	43		45	43		45
Operation range	Cooling	Ambient	Min.-Max.	°CDB			-15~50		
	Heating	Ambient	Min.-Max.	°CWB			-20~15.5		
Refrigerant	Type/Charge/GWP		kg	R-410A / 29 / 2,087.5		R-410A / 4 / 2,087.5	R-410A / 29 / 2,087.5	R-410A / 4 / 2,087.5	
	Charge		TCO ₂ Eq	6.1		8.4	6.1		8.4
Piping connections	Liquid	OD	mm				9.52		
	Gas	OD	mm				15.9		
	Piping length	OU - IU	Max.	m	50	75	50	75	
		System	Equivalent	m	70	90	70	90	
			Chargeless	m			30		
	Additional refrigerant charge		kg/m				See installation manual		
	Level difference	IU - OU	Max.	m			30.0		
		IU - IU	Max.	m			0.5		
Power supply	Phase / Frequency / Voltage		Hz / V		1~/50 / 220-240			3N~/50 / 380-415	
Current - 50Hz	Maximum fuse amps (MFA)		A		-		16	25	



Reliable, efficient and flexible infrastructure cooling 24/7/365 with Sky Air from Daikin

- › Boosted capacity indoor systems with official energy labels
- › Efficient cooling with widest indoor system range and free cooling option
- › Two-step solution for system selection
- › Flexible control with guaranteed cooling mode, backup operation and duty rotation

FSC



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin UK. Daikin UK has compiled the content of this publication to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin UK explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is Daikin UK copyright.

Printed on non-chlorinated paper.

ECPEN16-140UK 07/16

Daikin Airconditioning UK Limited The Heights Brooklands Weybridge Surrey KT13 0NY Tel 0845 6419000 Fax 0845 6419009 daikin.co.uk

Scottish Region
0845 641 9330

Northern Region
0845 641 9340

Midlands Region
0845 641 9370

Western Region
0845 641 9320

North London
0845 641 9360

South London
0845 641 9355