


the GRIME range

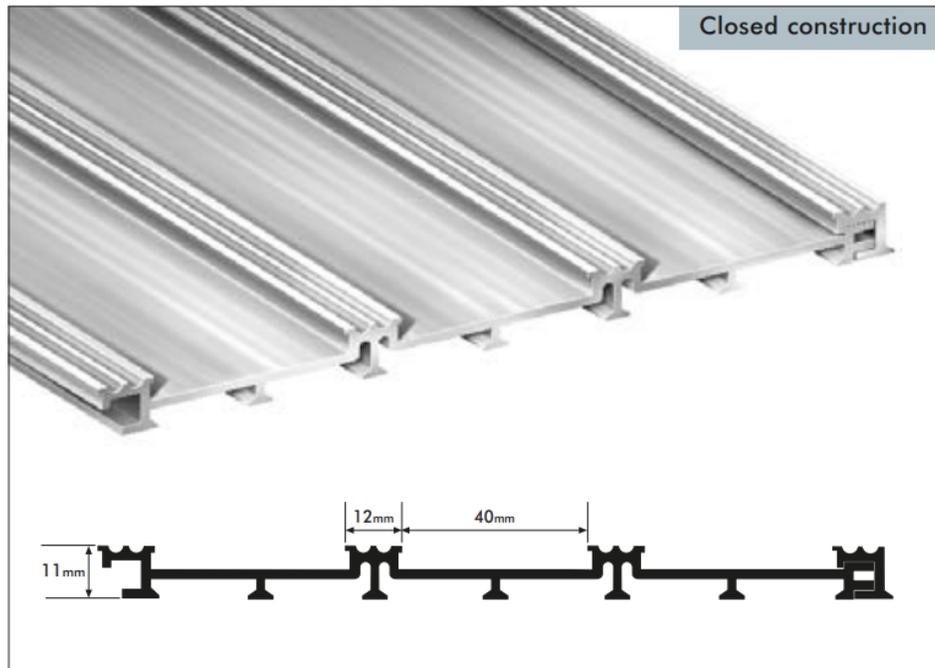

*Jaymart*

# Specification Grime Raincheck

## Jaymart Rubber & Plastics Limited

Roman Way  
Crusader Park  
Warminster  
Wiltshire  
BA12 8SP

Tel : 01985 218994  
email : [sales@jaymart.co.uk](mailto:sales@jaymart.co.uk)  
Web: [www.jaymart.co.uk](http://www.jaymart.co.uk)

# NBS SPECIFICATION GRIME RAINCHECK ENTRANCE MATTING

## TYPICAL SPECIFICATION

**N10**


**General Fixtures/Furnishings/Equipment**

**300**

**Entrance Matting**

**40**

**Miscellaneous Fittings**

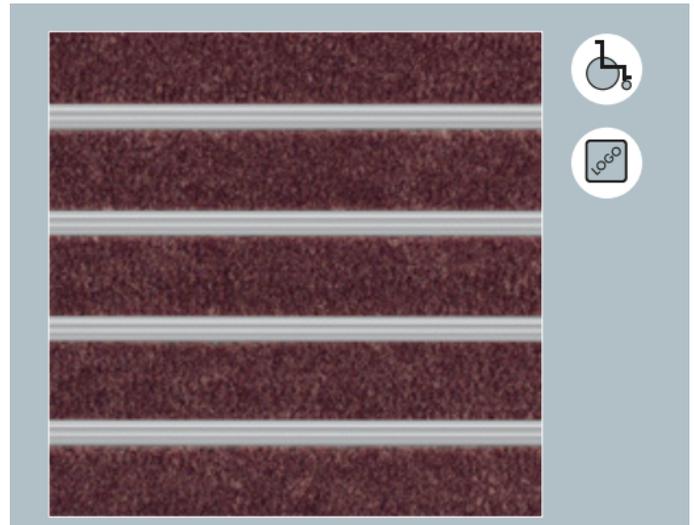

## Application

Internal High Traffic Areas

DDA Compliant can be used in conjunction with wheelchairs and shopping trolleys.

Closed Construction Heel Safe

## Description

A matting consisting of strips of nylon clean zone carpeting, secured between rigid silver aluminium scraper bars. Designed for indoor use in shops, public buildings, schools, offices, hotels, leisure centres and hospitals.

The matting can be supplied in virtually any size or shape but, for reasons of safe handling, it is recommended that mat sections, which can be butted together, do not exceed 2m<sup>2</sup>

The Panels interconnect on the front and back panel, the panels on the left to right can make up required by butting panels side by side. The Jaymart system allows for perfect rib alignment without the need for T Bars.

Grime Raincheck is 15mm thick and available in a range of eight single or combined colours

Consult Jaymart Rubber & Plastics Ltd technical literature for details of the colours and finishes available.

Jaymart Rubber & Plastics Ltd can also provide a design and specification service and it is recommended that they be consulted early in the design process.

## Manufacturer

Jaymart Rubber & Plastics Ltd Roman Way Crusader Park Warminster Wiltshire BA12 BSP

Tel: 01985 218997 Fax: 01985 217417 email : sales@jaymart.co.uk Web: www.jaymart.co.uk

## Product Reference

Grime Raincheck Entrance matting

# Aluminium Finishes Available

Standard Mill Finish & Anodised Finishes (Special Order)

## Composition

Made from 95% Recycled Aluminium

## Size

Specify size and shape but matting should be ordered in sections maximum width 3m wide

## Thickness/ Depth

15mm

## Weight

12.5Kg per m<sup>2</sup>

## Construction

Closed

Interlocking Panel System

## Pile Type

Construction

100% PA6 Nylon

Fire Rating

CFL - S1

Guarantee/ Warranty

10 year subject to correct maintenance and cleaning procedures being carried out

## Colours

Brown, Honey, Terracotta, Burgundy, Hunter Green, Navy Blue, Solid Black and New Charcoal

**Interchangeable / Replaceable inserts**

## Installation

Installed in recessed matwell or surface mounted. with or without frame dependent on floor finishes



**Revised 29/1/21**