



jaga

MINI WALL

Energy
SAVERS
LOW-H₂O

BROCHURE £ UK 2013





Energy
SAVERS
LOW-H₂O

MINI WALL

Strikingly discrete

- Extremely suited to spaces with large windows and for dwarf walls under window seats.
- Heights from 8cm
- Beautiful in combination with the free-standing Mini for glazed façades.
- Stable one-piece casing.
- Low-H₂O technology with super conductive and ultra fast heat exchanger for low energy consumption and maximum heat emission.
- Twin Power for better compensation of the downward cold air flow next to glazed façades or ventilation grilles.
- Safe to touch casing.
- **A 30 year guarantee** on the heat exchanger.

Also available as freestanding model for glazed façades. See page 74.

MINI WALL sandblast grey (001)






MINI WALL MOUNTED MODEL




DIMENSIONS (in cm)

HEIGHT 008 (opposite end connections)


All dimensions +/- 0.2cm

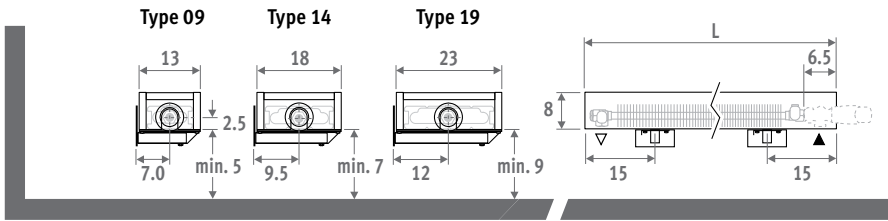

HEIGHT 013

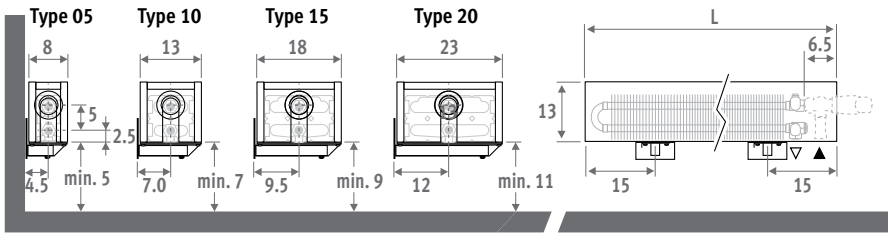


HEIGHT 023 / 028

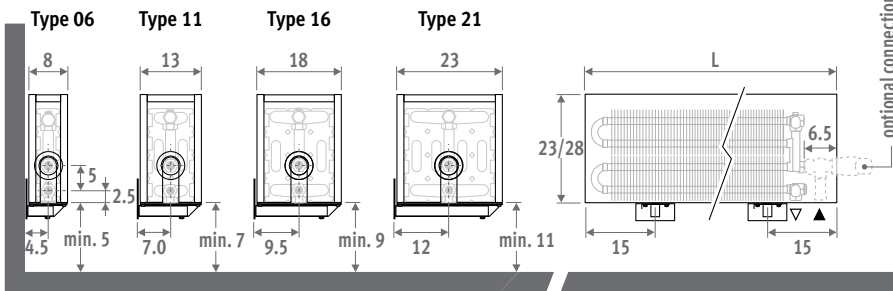

Also available as freestanding model for glazed façades. See page 92.

ORDERING CODE

code	height	length	type	colour
MINW .	008	060	09 .	XXX
<i>fill in colour code</i>				

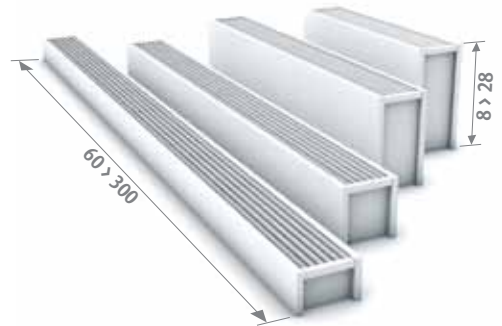

DELIVERY


- Easy to install by one person.
- Standard delivery:
 - Low-H₂O heat exchanger, air vent 1/8" and drain plug 1/2"
 - casing in one piece for connection left or right
 - wall brackets in the same colour as the casing

COLOURS

- Environmentally friendly, scratch-resistant, high UV resistant powder coating.
- Standard colours:
 - traffic white RAL 9016 (133), soft touch lightly structured satin lacquer
 - sandblast grey (001), fine texture metallic lacquer
- Other colours: see colour chart.

CONNECTION


Standard connection:
 Height 008: opposite end connection, flow left or right
 Other heights: same end connection, left or right connection.



It is not possible to connect to the wall from inside the casing, as the casing includes a closed rear panel.

CONNECTION SETS

Example showing universal valve, rotatable to the wall or to the floor, for Mini height 013/023/028
 TRV head and sleeve couplings included.

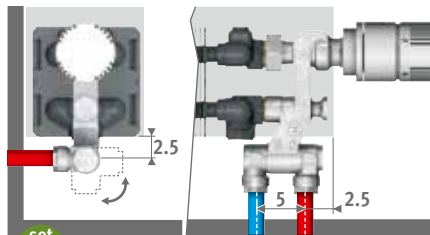

set	CODE 2-PIPE	£
26	COLO.CP2.JC.4...	105.30
	COLO.CP2.JW.4...	92.60

<i>fill in sleeve coupling code</i>	
Precision metal tube 14/1	114
Precision metal tube 15/1	115
Precision metal tube 16/1	116
RPE/ALU tube 16/2	316

Other connection sets:

See chapter "Connection sets and valves" for all connection options and technical information

Jaga Heating Products (UK) Ltd
Orchard Business Park
Bromyard Road
Ledbury, Herefordshire HR8 1LG

Tel.: +44 1531 631 533
Fax: +44 1531 631 534
E-mail: jaga@jaga.co.uk
www.jaga.co.uk

Jaga International
Verbindingslaan z/n
B-3590 Diepenbeek

Tel.: +32 11 29 41 16
Fax: +32 11 29 41 60
E-mail: export@jaga.be

WWW.
THE RADIATOR FACTORY
.COM

WWW.JAGAEXPERIENCELAB.COM

your partner: