## **Distribution Centres**

41-51 Freshwater Rd Chadwell Heath Romford Essex RM8 1SP Tel: 020 8586 4600 Fax: 020 8586 4646

Unit C1 Cothill Trading Estate Plympton Plymouth PL7 1SR Tel: 01752 339724 Fax: 01752 342746

Hillington Glasgow G52 4BN Tel: 0141 880 1200 Fax: 0141 880 1212 Unit 4 Waterloo Ind Est

26 Colquhoun Avenue

Flanders Road Hedge End Southampton S030 2QT Tel: 01489 779700 Fax: 01489 779701

Units B1/B3 Sneyd Trading Estate Sneyd Hill, Burslem Stoke on Trent ST6 2PA Tel: 01782 575727 Fax: 01782 575641

325-327 Penarth Road Cardiff CF11 8TT Tel: 029 2039 0146 Fax: 029 2022 4356

## Showrooms & **Trade Counters**

Units 1A/B Alexander Place Lower Park Road New Southgate London N11 1ST Tel: 020 8361 6050 Fax: 020 8361 4757

Unit 8, Ascent Park Edinburgh Way Harlow Essex CM20 2HW Tel: 01279 621980 Fax: 01279 621981

Unit 14 Meridian Trading Est Bugsby Way Charlton London SE7 7SJ Tel: 020 8269 5960 Fax: 020 8269 5961

Unit 1 Cliffside Trade Park Motherwell Way Lakeside West Thurrock Essex RM20 3LE Tel: 01708 680180 Fax: 01708 680181

Unit 2 City Park Ind Est Gelderd Road Leeds LS12 6DR Tel: 0113 224 4630 Fax: 0113 224 4631

Unit 8D Pompey Centre Fratton Way, Southsea Portsmouth P04 8TA Tel: 02392 894599 Fax: 02392 894598

Unit 5 Tower Court St David's Road Swansea Enterprise Pk Swansea SA6 8QL Tel: 01792 797337 Fax: 01792 774019



N&C Building Products Ltd. Registration Number: 140 Registered in England

www.ncdirect.co.uk

Astro range

ENHAN<sup>®</sup>CE Integrated Digital Showering









The Nicholls and Clarke Group of Companies is a company dedicated to the manufacture and supply of the finest building materials. Extensive research allows each company within the group to develop aspirational and affordable products that meet the ever changing demands of todays design conscious consumer. Inspired by nature, culture and trends from around the world, we let our creativity shine in a wide and versatile assortment of tiles and bathrooms. Distinctive and highly original designs side by side with more conservative and traditional ones meet the challenge of everyones individual taste.

We use our 135 year pedigree and innovative technologies to develop our distinctive style; we do not work to a set formula, rather a combination of instinct and memory; we anticipate the future and remember the past.











Ten Year Guarantee









	Page	
Integrated Water Delivery	2	
Corner Wetroom Panel	3	
Bi-Fold Door	4	
Curved Quadrant One Door	5	
Curved Quadrant Two Door	6	
Pivot Door	7	
Sliding Door	8	
Hinged door	9	
Walk-In Panel with Deflector	10	
Side and In-Line Panels	11	
Bath Screens	12	

	Page	
Curved Quadrant	14	
Bi-Fold Door	15-16	
Sliding Door	17-18	
Pivot Door	19	
Corner Entry	20	
Side Panels	21	
Bath Screens	22	

	Page	
Shower Trays	23	

### ENHAN<sup>®</sup>CE Integrated Digital Showering

N&C's Enhance Range brings together an innovative and stylish collection of shower enclosures and wetroom panels with the advanced technology of the thermostatic digital shower to bring you the ultimate in showering pleasure.

This contemporary collection features the most popular shower enclosure styles and shapes for the UK bathroom with bi-fold, pivot and sliding doors. The walk-in panel with a deflector screen offers a unique solution and can be installed straight to floor or to a tray. The corner and linear wetroom panels are available with the option of a designer glass motif. Products in this range are available with the option of integrated digital showering.

The optional chrome plated Enhance digital shower is integrated into the corner profiles of products from the range to create a sleek minimalist look. The shower is ceiling fed with the processor stored out of sight in the loft for a quick and easy installation whilst ensuring perfectly blended water enters the bathroom. There is the option of operating the shower by a remote control which you can position outside the enclosure, up to 10 metres from the processor. To aid showering, the optional remote control and the shower control panel flash until the water reaches your desired pre-set temperature. This ensures the perfect showering experience every time. The Enhance valve is compatible with all approved UK plumbing systems - gravity fed with integral pump; and high pressure/combination boilers.

For true peace of mind all Enhance enclosures and wetroom panels are covered by a Lifetime Guarantee. The valve (controller and processor) is covered by a 5 year guarantee and the kit (handset and hose) is covered by a 2 year guarantee.



# For more information go to www.barbourproductsearch.info

### Integrated Digital Valve

A stunning and innovative addition to our Enhance range is the optional chrome plated Enhance Digital Valve. The Enhance valve can be integrated into the corner profiles of a selected range of products from the Enhance collection - to create a sleek minimalist look.

The valve is ceiling fed with the processor stored out of sight in the loft for a quick and easy installation, whilst ensuring perfectly blended water enters the bathroom. The Enhance valve is compatible with all approved UK plumbing systems - gravity fed with integral pump of high pressure/combination boiler versions.

"Intelligent showering"







C

There is the option of operating the shower by a remote control which you can position outside the enclosure, up to 10 metres from the processor. To aid showering, the optional remote control and the shower control panel flash until the water reaches your desired pre-set temperature.

Code	Description
61004.11	High pressure combination boiler system
61004.12	Gravity system with integral pump

S61004.14 Digital dual switch





### "designed for ease of installation and the ultimate in showering style"

#### Features and Benefits:

- Precise, thermostatic digital technology
- Optional remote control •
- Integrated with product via bespoke aluminium profile which clips onto the wall profile
- High pressure/combi and gravity specific systems eco flow mode
- Blended water is fed through the ceiling via shower riser rail
- Dimensions
  - Tray to bottom of processor box 900mm
  - Top of processor box to top of extension tube 1440mm b. (can be trimmed as required)
  - Processor box 140mm high C
- Multi-function hand set
- Simple one touch operation
- Illuminated visual feedback on controls
- Stylish polished and satin chrome colour finish





## Corner & Linear Wetroom Panels

- Features and Benefits:
- Height: 1900mm

- Frame: Silver (corner panel only)
- Glass Thickness: 8mm
- Tray compatibility: Tray or straight to floor
- Chromed bracing bar on 1000mm corner panels and above
- Two bracng bars with all Linear Panels
- Chromed top caps (Corner panel only)
- Max distance from wall when using bracing 1060mm
- Pattern reversible for left or right hand fixing

Code	Size	Glass	Adjustment(mm)	
Corner Wetroom Panel				
S61003.70	600	Clear	575 - 600	
S61003.71	800	Clear	775 - 800	
S61003.72	900	Clear	875 - 900	
S61003.73	900	Patterned	875 - 900	
S61003.74	1000	Clear	975 - 1000	
S61003.75	1000	Patterned	975 - 1000	
S61003.76	1200	Clear	1175 - 1200	
S61003.77	1200	Patterned	1175 - 1200	
S61003.78	1400	Clear	1375 - 1400	
Linear Wetroo	m Panels			
S61003.79	827	Clear		
S61003.80	827	Patterned		
S61003.81	927	Clear		
S61003.82	927	Patterned		
S61003.83	1127	Clear		
S61003.84	1127	Patterned		
S61003.85	1327	Clear		



Enhance 1200mm Corner Wetroom Panel - S61003.76
 Integrated Digital Valve - S61004.11 or S61004.12







## Bi-Fold Door

Code	Size	Adjustment(mm)
S61003.86	760	710 - 760
S61003.87	800	750 - 800
S61003.88	900	850 - 900
S61003.89	1000	950 - 1000
S61003.90	1200	1150 - 1200

### Features and Benefits:

- 1900mm high
  - •
  - Smooth running roller bearings •
  - Chromed top caps .
  - Concealed fixings
  - Easy installation •
  - Reversible for left or right hand fixing •
  - Install to tray or wetroom •

# Trapezium





### *"space saving enclosure"* - opens inwards"

• 6mm toughened safety glass

Chromed aluminium bolt through handle and hinges

### For Side and In-line Panel information please see page 11

#### Features and Benefits:

- Designed to resolve window position restrictions •
- Height: 1900mm •
- Frame: Silver •
- Glass Thickness: Door 6mm, Frameless Side Panels 8mm •
- Vertical Adjustment: 25mm each profile .
- Dimensions: 1180 x 780mm
- Tray Compatibility: LAT1 left or right handing
- Enclosure reversible for left or right hand fixing

Code	Door(mm)	Angled Panel(mm)	Panel(mm)	Adjustment(mm)
S61004.31	760	900	760	17 in each profile

For tray details see page 23

- Enhance Trapezium S61004.32.
  Integrated Digital Valve S61004.11 or S61004.12
  Trapezium Tray S61004.43



# Curved Quadrant One Door

#### Features and Benefits:

- Height 1900mm
- Frame: Silver
- Glass Thickness: 6mm
- Vertical Adjustment: 25mm
- Tray Compatibility: 550mm radius
- Smooth running roller bearings with chromed brass wheel assemblies
- Fully reversible for left or right hand installation

Code	Description	Size (mm)	Adjustment(mm)
S61004.35	Single Door	800 x 800	775-800
S61004.36	Single Door	900 x 900	875-900
S61004.37	Single Door Offset	800 x 900	775-800 & 875-900
S61004.38	Single Door Offset	800 x 1200	775-800 & 1175-1200
S61004.39	Single Door Offset	900 x 1200	875-900 & 1175-1200

Enhance 900mm Single Door Curved Quadrant - S61004.36
 Integrated Digital Valve - S61004.11 or S61004.12
 Remote Digital Dual Switch - S61004.14





- Enhance 900mm Twin Door Curved Quadrant S61004.17
   Integrated Digital Valve S61004.11 or S61004.12
   Remote Digital Dual Switch S61004.14

### Curved Quadrant Two Door

### Features and Benefits:

- Height 1900mm
- Frame: Silver •
- Glass Thickness: 6mm •
- Vertical Adjustment: 50mm •
- Tray Compatibility: 550mm radius
- Smooth running roller bearings with chromed brass wheel assemblies
- Fully reversible for left or right hand installation

Please note: Enhance Integrated Digital shower valve is not suitable for use with the 800 x 800mm or 800 x 900mm Twin Door Curved Quadrant

Code	Description	Size(mm)	Adjustment(mm)
S61004.16	Twin Door	800 x 800	775-800
S61004.17	Twin Door	900 x 900	875-900
S61004.19	Twin Door	1000 x 1000	975-1000
S61004.18	Twin Door Offset	800 x 900	775-800 & 875-900
S61004.20	Twin Door Offset	800 x 1000	775-80 & 975-1000

Enhance 1200 x 800mm Single Door Curved Quadrant - S61004.38
 Integrated Digital Valve - S61004.11 or S61004.12





## Pivot Door

Code	Size	Adjustment (mm
S61003.91	760	710 - 760
S61003.92	800	750 - 800
S61003.93	900	850 - 900

#### Features and Benefits:

- 6mm clear toughened safety glass •
- 1900mm high .
- Chromed aluminium bolt through handle .
- Magnetic door closing
- PVC vertical seals •
- Chromed top caps ٠
- Concealed fixings .
- Easy installation
- Reversible for left or right hand fixing .
- Install to tray or wetroom •
- Reduced opening into room due to hinge position •

#### For Side Panel information please see page 11

### "takes up less external space when opened due to the hinge position"

Right: • Enhance 900mm Pivot Door - S61003.93 • Integrated Digital Valve - S61004.11 or S61004.12

- Above: Enhance 900mm Pivot Door S61003.93 900mm Frameless Side Panel S61003.96 Integrated Digital Valve S61004.11 or S61004.12 Remote Digital Dual Switch S61004.14





# Sliding Door

Code	Size	Adjustment(mm
S61004.04	1000	950 - 1000
S61004.05	1100	1050 - 1100
S61004.06	1200	1150 - 1200

#### Features and Benefits:

- 6mm clear toughened safety glass •
- 1900mm high
- Chromed aluminium bolt through handle •
- PVC vertical seals ٠
- Chromed top caps •
- Concealed fixings .
- Easy installation •
- Reversible for left or right hand fixing .
- Adjustable chrome smooth on brass running bearings .
- Install to tray or wetroom •

For Side Panel information please see page 11

"an elegant and discreet use of cutting edge technology"



- Above: Enhance 1200mm Sliding Door S61004.06 900mm Frameless Side Panel S61003.96 Integrated Digital Valve S61004.11 or S61004.12 Remote Digital Dual Switch S61004.14







Enhance 900mm Hinged Door S61004.23. Digital Valve
 Integrated Digital Valve - S61004.11 or S61004.12
 Remote Digital Dual Switch - S61004.14

# Hinged Door

#### Features and Benefits:

- Height: 1900mm
- Frame: Silver
- GlassThickness: 8mm
- Vertical Adjustment: 50mm
- Removable top rail when installed in an alcove
- Ball catch closing mechanism
- Outward opening doors must be hinged from the wall
- Reversible for left or right hand fixing

Code	Size	Adjustment(mm)
S61004.21	760	710 - 760
S61004.22	800	750 - 800
S61004.23	900	850 - 900
S61004.24	1000	950 - 1000

For Side Panel information please see page 11

Fight:
Enhance 900mm Hinged Door - S61004.23
Enhance 900mm Frameless Side Panel - S61003.96
Integrated Digital Valve - S61004.13 or S61004.12
Remote Digital Dual Switch - S61004.14





### Walk-in Panel with Deflector

Code	Size	Adjustment(mm)
S61004.07 (R/H)	900	960 - 985
S61004.08 (L/H)	900	960 - 985
S61004.09 (R/H)	1100	1160 - 1185
S61004.10 (L/H)	1100	1160 - 1185

Right or left handing must be specified.

Corner Wetroom Panel pricing - see page 3.

Features and Benefits:

- 8mm clear toughened safety glass
- 1900mm high
- 900mm Walk-in Panel with Deflector recommended for use with 1200mm long tray .
- 1100mm Walk-in Panel with Deflector recommended for use with 1400mm or 1600mm long tray
- Chromed aluminium handle •
- Chromed brass hinges
- Chromed plastic top caps
- Outward opening only deflector panel
- Chromed bracing assembly (max distance from wall 1060mm)
- 25mm of adjustment in the wall profile
- PVC seals
- Install to tray or wetroom

For Side Panel information please see page 11

Right: • Enhance 900mm Walk-in Panel with Deflector - S61004.07 (right handed) • 800mm Corner Wetroom Panel - S61003.71

9

Enhance 900mm Walk-in Panel with Deflector - S61004.07 (right handed)
Integrated Digital Valve - S61004.11 or S61004.12
Remote Digital Dual Switch - S61004.14

"the two sizes allow you to create your own wetroom space"







## Bath Screens

### Features and Benefits:

- Height: 1500 Width: 800mm
- Glass Thickness: 6mm clear or frosted
- Reversible for left or right hand fixing
- Unique sealing system between vertical and horizontal aluminium
- Suitable for use with power showers

Code	Description	Glass	Adjustment(mm)
S61004.15	Bath Screen	Clear	810-835
S61004.40	Bath Screen	Frosted	810-835
S61004.25	Unpumped Valve Righ	nt Hand	
S61004.26	Unpumped Valve Left	Hand	
S61004.27	Pumped Valve Right I	Hand	
S61004.28	Pumped Valve Left Ha	and	

# Side Panels & In-Line Panels

Fea	tures and Benefits:	Code	Size	Description	Adjustment(mm)
•	8mm clear toughened safety glass	S61004.41	700	Side Panel	660-700
•	1900mm high	S61003.94	760	Side Panel	720 - 760
•	Chromed top caps	S61003.95	800	Side Panel	760 - 800
•	Concealed fixings	S61003.96	900	Side Panel	860 - 900
•	Easy installation	S61003.97	1000	Side Panel	960 - 1000
•	Compatible with Enhance corner posts				
	and extension profiles	S61003.98	200	In-Line Panel	950-1000
•	Reversible for left or right hand fixing	S61003.99	300	In-Line Panel	1050-1100
		S61004.00	400	In-Line Panel	1150-1200
		S61004.01	800	In-Line Panel	1532-1582
		S61004.02*	900 X 900	Neo Pack	17mm each side
		S61004.03*	1200 X 900	Neo Pack	17mm each side
		S61004.42	-	Extension profile	35mm (extra)

\* Only for use with Bi-Fold Doors

 Above:

 Enhance 760mm Bi-Fold Door - S61003.86

 1200 x 900mm Neo Angle Pack - S61004.03

 Integrated Digital Valve - S61004.11 or S61004.12

 Remote Digital Dual Switch - S61004.14

Enhance Bath Screen - S61004.15
 Integrated Digital Valve Right Hand - S61004.27 or S61004.25





Enhance Bath Screen with Frosted Glass - S61004.40



# For more information go to www.ba

The Astro Range offers a variety of contemporary products, at an affordable price. The Astro Range encompasses an array of quadrant, bi-fold, pivot, sliding and corner entry enclosures, a selection of side panels, stylish bath screens. Astro Range enclosures and bath screens feature toughened safety glass and bright silver framing, which effortlessly and seamlessly compliment all bathroom shapes and styles.

Astro range

Olympus





# Curved Quadrant

#### Features and Benefits:

- Height: 1850mm
- Glass Thickness: 6mm
- Tray Compatability: 550mm radius
- Full length colourless PVC and magnetic seals
- Chromed brass bolt through handles on inside and outside of enclosure
- Chromed plastic top caps
- Easy Installation
- Reversible for left or right hand fixing

Code	Size (mm)	Adjustment (mm)
S61002.77	800 x 800 x 1850	770 - 790
S61002.78	900 x 900 x 1850	870 - 890
S61002.87	900 x 800 x 1850	870 - 890 & 770 - 790
S61002.88	800 x 1000 x 1850	770 - 790 & 970 - 990
S61002.89	1200 x 900 x 1850	1170 - 1190 & 870 - 890



Left: • Astro 900 x 900mm Quadrant - S61002.78



### more information go to wy eductsearch.info



# Bi-Fold Door

### Features and Benefits:

- Height: 1850mm
- Glass Thickness: 4mm
- Chromed plastic top caps
- Chromed brass bolt through handles
- Smooth running bearing assemblies running in the top and bottom rail
- Easy Installation
- Reversible for left or right hand fixing

Code	Size (mm)	Adjustment (mm) Alcove Fitting	Adjustment (mm) With Side Panel
S61002.70	760 x 1850	700 - 750	723 - 773
S61002.71	800 x 1850	740 - 790	763 - 813
S61002.72	900 x 1850	840 - 890	863 - 913

Above: • Astro 800mm Bi-Fold Door - S61002.71

For Side Panel information please see page 20



## 1200mm Bi-Fold Door

#### Features and Benefits:

- Height: 1830mm
- Frame: Silver or white
- Glass Thickness: 4mm
- Reversible for left or right hand fixing
- Fully framed door with magnetic closing mechanism and cushioned seals
- Full length integral handle on inside and outside of door
- Precision roller bearing mechanism for smooth sliding action

Code	Size(mm)	Frame	Adjustment(mm)	Suit Tray
S61002.28	1200	Silver	1145-1200	1200

### Side Panels

Code	Size	Panel Type	Adjustment (mm)	Glass Thickness
S61002.93		Extension Profile	35 (Extra)	N/A
S61002.30	760mm	Side	690-745	4
S61002.32	760/800mm	Side	725-780	4
S61002.34	900mm	Side	860-915	4





Astro 1200mm Bi-Fold Door - S61002.28
 Astro 800mm Side Panel - S61002.32



Astro 1200mm Sliding Door - S61002.76
 Astro 800mm Side Panel - S61002.80



## Sliding Door

### Features and Benefits:

- Height: 1850mm
- Glass Thickness: 6mm
- PVC / magnetic seals
- Chromed brass bolt through handle
- Chromed plastic top caps
- Bearing assemblies running in the top rail
- Spring loaded clip assemblies running in the bottom rail
- Reversible for left or right hand fixing

Code	Size (mm)	Adjustment (mm) Alcove Fitting	Adjustment (mm) With Side Panel
S61002.84	1000 x 1850	940 - 990	963 - 1013
S61002.85	1100 x 1850	1040 - 1090	1063 - 1113
S61002.76	1200 x 1850	1140 - 1190	1163 - 1213

For Side Panel information please see page 20

Right: • Astro 1200mm Sliding Door - S61002.76



### Pivot Door

#### Features and Benefits:

- Height: 1850mm
- Glass Thickness: 6mm
- Watertight magnetic seals
- Chromed brass bolt through handle
- Chromed plastic top caps
- Smooth operation hinges with chromed plastic cover caps
- Reversible for left or right hand fixing

Code	Size (mm)	Adjustment (mm) Alcove Fitting	Adjustment With Side Pa
S61002.73	760 x 1850	700 - 750	723 - 773
S61002.74	800 x 1850	740 - 790	763 - 813
S61002.75	900 x 1850	840 - 890	863 - 913

Astro 800mm Bi-Fold Door - S61002.74

For Side Panel information please see page 20

nt (mm) Panel





### Side Panels and Extension Profiles

Features and Benefits:

- Height: 1850mm
- Glass Thickness: 4mm
- Chromed plastic top caps
- Reversible for left or right hand fixing

Code	Description	Size (mm)	Adjus
S61002.90	Side Panel	700 x 1850	640 -
S61002.79	Side Panel	760 x 1850	700 -
S61002.80	Side Panel	800 x 1850	740 -
S61002.81	Side Panel	900 x 1850	840 -
S61002.92	Extension Profile		40mn

## Corner Entry

#### Features and Benefits:

- Height: 1850mm
- Glass Thickness: 6mm
- PVC / magnetic seals
- Chromed brass bolt through handles
- Chromed plastic top caps
- Bearing assemblies running in the top rail
- Spring loaded clip assemblies running in the bottom rail
- Extension profiles available to take up to 800mm size if necessary depending upon installation

Code Size (mm) Adjustment (mm) S61002.86 760 x 760 730 - 750

Astro 760mm Corner Entry - S61002.86



Astro 800mm Side Panel S61002.80
 Astro 1200mm Sliding Door S61002.76

istment (mm)

- 690
- 750
- 790
- 890
- m extra

### ch.info For more information go to wv

### **Bath Screens**





### Extended Curved Bath Screen

#### Features and Benefits:

- Height: 1500mm Fixed Panel: 316mm Hinged Panel: 646mm
- Glass Thickness: 6mm Fixed Panel/Curved Hinged Panel 5mm
- Suitable for all standard bath mixer and electric showers
- Not recommended for use with pumped or pressurised systems
- Reversible for left or right hand fitting
- Features horizontal chrome support rail

Code	Frame	Adjustment (mm)
S61002.11	White	955-970
S61002.12	Silver	955-970

### Inward Folding Bath Screen

#### Features and Benefits:

- Height: 1500mm. Width: 930mm open/540mm closed
- Glass Thickness: 6mm Fixed Panel, 5mm Hinged Panel
- Frameless with radius glass
- Reversible for left or right hand applications
- Suitable for use with power showers

Frame Adjustment (mm) Code S61002.91 Silver 923 - 938







### Angled Bath Screen

Features and Benefits:

- Glass Thickness: 6mm

Code S61002.94 Silver

### Features and Benefits:

### Code S61002.09 White S61002.82 Silver

### Features and Benefits:

- Glass Thickness: 5mm
- Frameless with square glass

Code

S61002.07 Whit S61002.83 Silve

- Height: 1500mm. Width: 850mm
- Frameless with radius glass
- Reversible for left or right hand applications
- Suitable for all standard bath mixer and electric showers
- Not recommended for use with pumped or pressurised systems

Mampus

stro

• Bright silver aluminium towel rail

Frame Adjustment (mm) 850-875

### Curved Bath Screen

- Height: 1360mm. Width: 820mm
- Glass Thickness: 5mm
- Frameless with radius glass
- Reversible for left or right hand applications
- Suitable for all standard bath mixer and electric showers
- Not recommended for use with pumped or pressurised systems
- Rotates through 180° for access
- Reversible for left or right hand applications

#### Frame Adjustment (mm)

- 810-825
- 810-825

### Standard Bath Screen

- Height: 1360mm. Width: 820mm
- Suitable for all standard bath mixer and electric showers
- Not recommended for use with pumped or pressurised systems
- Rotates through 180° for access
- Reversible for left or right hand applications

#### Frame Adjustment (mm)

te	810-825
er	810-825

## Trays





IJ							
$\cup$	C	5	L		IJ	u	1

S8050270 760 x 760mm S8050271 800 x 800mm S8050272 900 x 900mm S8050273 1200 x 760mm

Size

Code

S8050276

S8050277

S8050278

Mira Flight white tray, no upstands Mira Flight white tray, no upstands Mira Flight white tray, no upstands Mira Flight white tray, no upstands

760mm Mira Flight square riser kit 800/900mm Mira Flight square riser kit Mira Flight riser kit 1200 x 760mm



Code	Size	Description
S8050274	800mm	Mira Flight quadrant white tray, no upstands
S8050275	900mm	Mira Flight quadrant white tray, no upstands
S8050279	800/900mm	Mira Flight quadrant riser kit



Code	Size	Description
S2220031	760 x 760mm	Resin stone shower tray, white
S2220041	800 x 800mm	Resin stone shower tray, white
S2220051	900 X 900mm	Resin stone shower tray, white
S2220052	1200 x 760mm	Resin stone shower tray, white
S2220053	1200 x 800mm	Resin stone shower tray, white

	Description
m	Resin stone shower tray, white
m	Resin stone shower tray, white
m	Resin stone shower tray, white



Code	Size
52220071	800mm
52220061	900mm

Description


Quadrant resin stone shower tray, white Quadrant resin stone shower tray, white

### **Trapezium Tray**

- Low Level Tray made from solid surface technology
- Approved for use with power shower systems
- Maximum flow rate 25 litres per minute
- Tray supplied with 90mm waste as standard

#### Code Description

S61004.43 Enhance Trapezium tray LH S61004.44 Enhance Trapezium tray RH



Premier Shower Deck Suitable for a level access wet floor area

The Premier shower deck is the perfect solution for level access showering. The floor former can be installed in an existing concrete or timber floor. It has been designed with the waste outlet located to avoid joists in most circumstances.

Premier Deck floor formers are compatible with our Enhance, FreeSpace, Finesse & Pro-door shower enclosures.

Once installed the shower room can be tanked using the Nicobond Wet Room Tanking system in preparation for tiling. Alternatively vinyl flooring can be fitted.

The Premier Shower deck can be used either with a gravity gulley or the Phlexiflow pumped waste system. Circular or Tile grating can be used in the standard gulley version. The Linear gulley version is for the 800mm Phlexiline linear drainage system.

### Consumer Guide

### IMPORTANT PRODUCT DETAILS

- · Any guarantee variations are indicated separately. statutory 12 month guarantee will apply
- All Shower Screens and Enclosures are manufactured using toughened safety glass which complies to BSEN12150.
- not be subjected to any sharp impact or severe temperature fluctuation which may also cause a stress point to develop in the glass.
- Toughened glass is physically and thermally significantly stronger than standard glass. However a significant impact (or stress as outlined above) can cause Toughened glass to break. In the event of breakage, toughened glass will break safely into small fragments in line with all relevant Standards.
- All aluminium profiles are extruded in accordance with BS6063 and BS1474.
- All heights guoted for Enclosures and Screens are from the top of the Shower Tray. • All fixings are hidden on products.
- All fixings and pivot pins are manufactured from stainless steel this adds great strength and durability to products.
- All seals and gaskets on products are manufactured from colourless PVC.
- The design rights of these products are owned and all rights reserved.
- All Shower Screens and Enclosures are tested in accordance with BSEN14428 Shower Enclosures, functional requirements and test methods.

### Truelife Lifetime Guarantee - Enhance range only

All Shower Enclosures and Bath Screens are guaranteed against faulty materials or manufacture for LIFE, provided they have been installed, used and maintained in accordance with our instructions. All product guarantees must be completed and returned within 60 days of purchase to validate the relevant guarantee. Failure to meet this deadline will result in a statutory 1 year guarantee on all products.

- Should a claim arise, Customer Relations will investigate the issue. As part of this investigation we request that the following conditions be satisfied:
- 1. Proof of purchase at the time of the claim. 2. The guarantee applies to the original purchaser only and is non transferable
- 3. The product has been fitted / installed in accordance with our fixing instructions, local bylaws and
  - general good plumbing practice

4. The product has been maintained and cared for in accordance with our instructions (including regular and appropriate cleaning). If in our opinion the product has been modified, misused, neglected, wilfully or accidentally damaged,


we can accept no responsibility for failure.

Our representatives must be given the opportunity to inspect the product in the installed condition Should any products included in the Lifetime guarantee be used for Commercial use i.e. leisure clubs, schools, hospitals, student accommodation, hotels or residential homes, only a 5 year guarantee will be applicable.

If in our opinion the product fails due to faulty materials or manufacture and that the conditions

Please Note the Astro products feature a Ten Year Guarantee. All terms above apply for ten years.

23

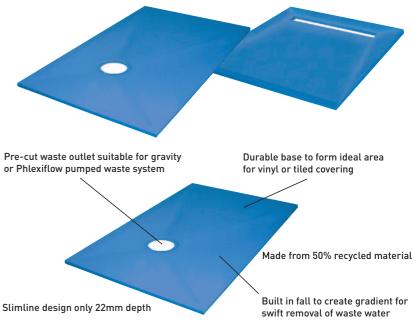

• Enclosures and Screens carry a manufacturer's guarantee if products are installed according to the installation instructions - see guarantee criteria below.

• All guarantee forms supplied with installation instructions must be completed and returned within 60 days to validate the lifetime guarantee otherwise only a

• It is important to note, that the glass must not be mounted or 'pinched' in such a way that would cause a stress point to develop in the glass. In addition, it must

- above have been met we will arrange for a specialist Technical Sales Representative to repair or replace that item at our option.
- We believe in continuous improvement. If in our opinion the product has failed under the terms of the Guarantee and a replacement is offered but identical goods are no longer available, we will replace it with our nearest equivalent product. For countries outside of the UK and Republic of Ireland, where a product has failed due to faulty materials or manufacture, a replacement product or product part will be offered only.
- Should we carry out work as a result of a claim but subsequently it is revealed that the product has been abused or improperly installed, we reserve the right to charge the customer for the expense incurred.
- The liability is limited to the product supplied by us and does not extend to consequential loss or damage arising from the defective product.
- This Guarantee, which is effective for products purchased after February 1st 2006, states our entire liability and is offered to customers acquiring our products as consumers, not in the course of trade or business. Ex displays or products reinstalled from their original position are not covered under his guarantee
- Non glass or metallic parts (e.g. seals) are subject to normal wear and tear through usage and are therefore covered on all products for 1 year from installation. This Guarantee does not affect your statutory rights
- This Guarantee is wholly applicable in the U.K. and Republic of Ireland export conditions as indicated.