


PRTR0014 | 2000108750

ARTICLE GROUP : **PRTR0013 ++** | ARTICLE FAMILY : **Electronic urinal flushing systems** | PRODUCT GROUP : **Flushing systems**

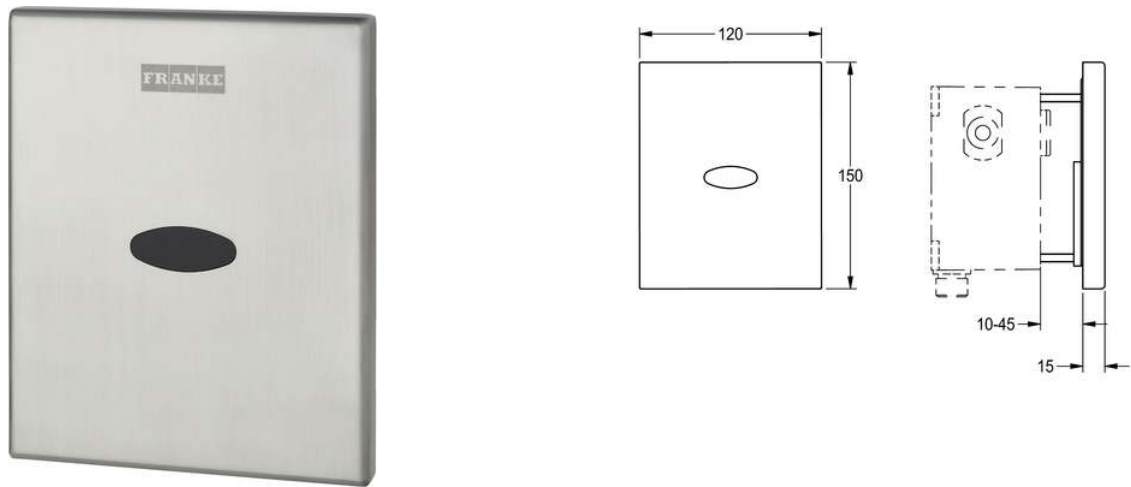

Finished installation kit for FLUSH-S non-touch, opto-electronically controlled urinal flush valve DN 15 for installation in walls. With self-closing solenoid valve cartridge, control electronics with sensor and stainless steel cover plate 120 x 150 mm.

with power supply (230 V AC)

TECHNICAL DATA

calculation flow rate cold water	0.30 liter per second
default automatic hygiene flushing	12h after the last activity
functional principle	electronic self-closing
gross weight	0.66 kg
diameter nominal	DN 15
material casing	stainless steel
maximum flow pressure	8.00 bar
minimum flow pressure	0.50 bar
net weight	0.66 kg
power supply connection	230 V AC
position of power connection	from side
power consumption	2
protective system IP	IP40
surface finish casing	satin finished
type of flushing fitting	urinal flush valve
type of mounting	in-wall installation with box
type of operation	sensor operation
type of sensor	opto-electronic sensor