



Colour: DB 703

Routiero LED

Decorative LED illuminated bollard

Specifications

Fully cylindrical decorative illuminated bollard made from cast aluminium with a flat sealing head section. Supplied with a double strip of 18 LEDs. Base protection: IP66. Internal low voltage (24V) cable with connector plug (IP67).

Mounting

Removable with 3p-Technology, comprising a ground shell, junction piece with integrated breaking point and cabling groove, two clamping bolts, a hex head bolt and a lock nut.

Bollard

Also available without illumination for cohesive project design.


3p-Technology

| IB ROU T 020 XXX XX 08

Product codes for powder coated DB 703

Finish

Powder coating in RAL 3020, 6005, 6009, 7016, 7035, 9005, 9006, 9016 and DB 703 as standard.

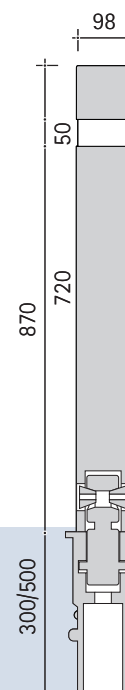

Measurements

Height above ground level: 870mm

Diameter: 98mm

Glazing height: 50mm

Ground shell height: 300mm (standard) or 500mm

Weight: 15.5kg