

Technical data

Cubicles

	A	lcw	lpk	IP	IK	nbr of vertical mod.	height	width	depth	associability
Cubicles	3200 A	85 kA rms/1s	187 kÅ	30/31/55	07 08 10	36	2000 mm	300 mm 400 mm 650 mm 800 mm	400 mm 600 mm	width

Wall mounted and floor standing enclosures

	A	lcw	lpk	IP	IK	nbr of vertical mod.	height	width	depth	associability
Enclosures	630 A	25 kA rms/1s	53 kÅ	30/31/40/ 43/54	07/08/ 10	4 6 12 16 20 24 28 32	300 mm 500 mm 700 mm 900 mm 1100 mm 1300 mm 1600 mm 1800 mm	600 mm (enclosure) 300 mm (cable duct)	235 mm 235 mm 235 mm 235 mm 235 mm 305 mm 305 mm	width and height width

Pack wall mounted enclosure


	A	IP	IK	nbr of raw	height	width	depth	associability
Pack	160 A	30	07/08	2 3 4 5 6	480 mm 630 mm 780 mm 930 mm 1080 mm	555 mm	186 mm	

The Prisma Plus solution perfectly incorporates Schneider Electric switchgear:

- > Air circuit breaker: Masterpact NT, NW
- > Molded case circuit breaker: NSX, NS, Easycompact
- > Modular devices: Multi 9, Acti 9,...
- > Source change over
- > Fuses switches: Fupact
- > Switches: Interpact
- > Speed drives: Altivar
- > Motor control: TeSys range,...
- > Control & signaling units: Harmony push buttons
- > ...

To find out more

- > www.schneider-electric.com
- > Or refer to the technical catalogue
- > Or contact your distributor

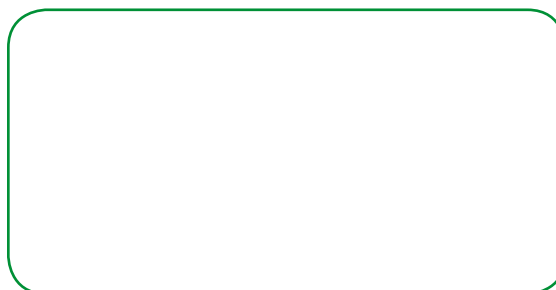

Schneider Electric Industries SAS

43-45 Bd. Franklin-Roosevelt
F-92505 Rueil-Malmaison
FRANCE
Tel. : +33 (0) 1 41 29 70 00

www.schneider-electric.com

Due to evolution of standards and equipment, characteristics indicated in texts and images in this document are binding only after confirmation by our departments.

Publication: Schneider Electric
Design: pemaco - 3D illustrations: Polynotes
Photos: Gettyimages/Gulfimages - Gettyimages/Stockbite-Georges Doyle
Matton/Juice Images - Blend Images/Jupiter Images - Eyedea - © Bruno Moyen