

# modus® Technical information French doors



All together better



These stunning modus French doors feature sleek, flat faces and authentic timber aesthetics


modus French doors feature sleek, flat faces for sophisticated looks. A dedicated mullion with a slim rebate improves sightlines, whilst an option of an additional third seal to improve weather performance is also available. Maximum thermal performance can be achieved with a triple-glazed specification, offering U-values as low as 0.8.

Min / max sizes	Width (mm)	Height (mm)
French doors	Min: 1200 Max: 2000	Min: 1800 Max: 2300

Config	Glass 1 (external)	Glass 2 (internal)	Glass 3 (internal)	Gas fill	Spacer bar	Reinforcing	WER	Energy index	U value
4/16/4/16/4	Diamant	Planitherm One	Planitherm One	Argon	SwisSpacer Ultimate	Full Thermal	B	-3	0.78
4/16/4/16/4	Optiwhite	Pilkington KS	Pilkington KS	Argon	SwisSpacer Ultimate	Full Thermal	A++	22	0.85
4/20/4	Optiwhite	N/A	Pilkington KS	Argon	SuperSpacer Premium	Full	A	8	1.2
4/20/4	Diamant	N/A	Planitherm One	Argon	SuperSpacer Premium	Full	C	-13	1.2

Contact our Technical department for additional performance specifications


## French doors Triple-glazed

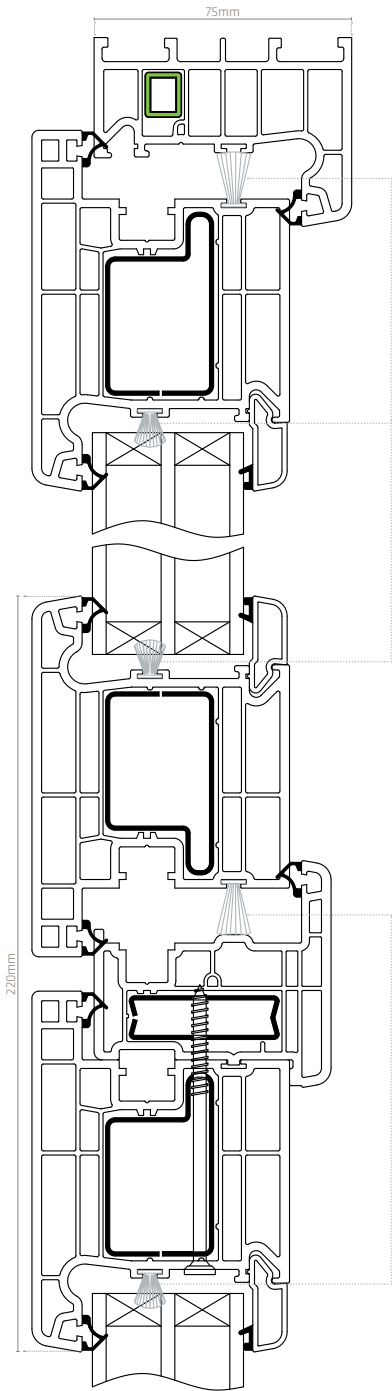

OPTIONAL  
Third seals are an optional component

OPTIONAL  
Third seals are an optional component

## French doors Double-glazed

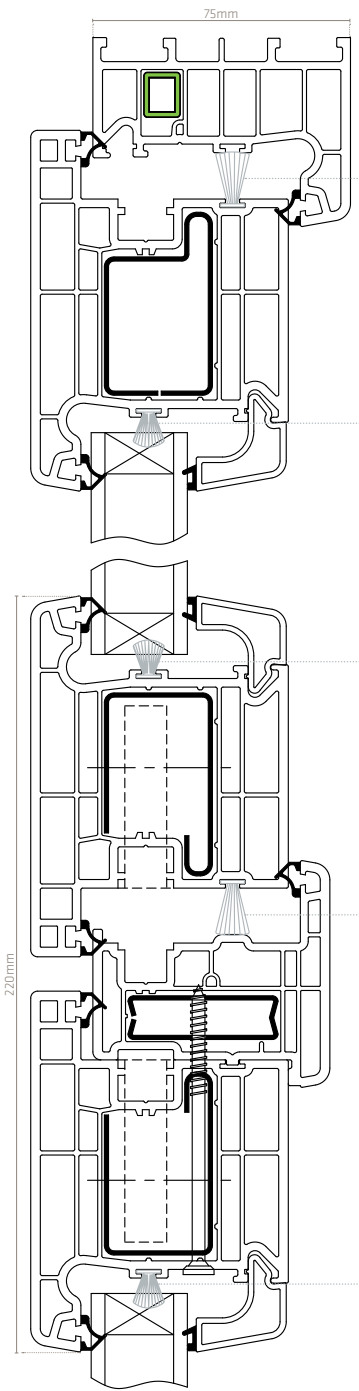

OPTIONAL  
Third seals are an optional component

OPTIONAL  
Third seals are an optional component