

Lowriser

The Stannah Lowriser is a low rise platform lift which provides internal or external vertical travel up to 2m. It is designed to give customers choice and flexibility.



Lowriser is ideal for all types of public buildings, schools, colleges, shops etc, giving access to wheelchair users over changes in level of up to 2m.

Lowriser key features

- Three platform sizes
1450mm x 800mm
1450mm x 900mm
1450mm x 1100mm
- Maximum load 300kg
- Up to 2m travel
- Shallow ramp for easy access. Ramp automatically folds when lift in use.
- Hardwearing finish for excellent durability
- Internal or external installation
- Range of finishes available – please ask for details
- 1 year warranty
- 5 year anti-corrosion warranty
- Battery back-up
- Automatically returns to ground level after use



**Need to go higher?
Ask about our up to
2m option.**

Lowriser will help building owners/operators to meet the requirements of:

- The Equality Act 2010
- Part M of the Building Regulations (England and Wales) and Section 4.2 of the Technical Handbook (Scotland), both of which cover the requirements that many new buildings must meet to ensure ease of access and use
- BS 8300:2009 Code of Practice covering the design of buildings and their approaches to meet the needs of disabled people



All of our Lowriser lifts are CE marked and comply with BS 6440:2011, the current British Standard for Powered Lifting Platforms

Stannah

Lowriser

Standard features

- Vertical lifting platform including 1100mm high side rails
- Open side panels
- 2-way rocker post-mounted call stations
- Internal or external application
- Automatic power folding ramp
- Nitro-carburised finished steel and aluminium construction
- 5 year anti-corrosion warranty
- Easy to use controls for operator independence
- Shallow ramp for easy access
- Travelling barrier
- Concertina blind fitted to underside of platform for safety and to guard against litter
- Aluminium non-slip floor
- Colour – RAL 9002
- Battery powered emergency raising and lowering
- Interlocked gate at upper level on lifts serving 250mm or more

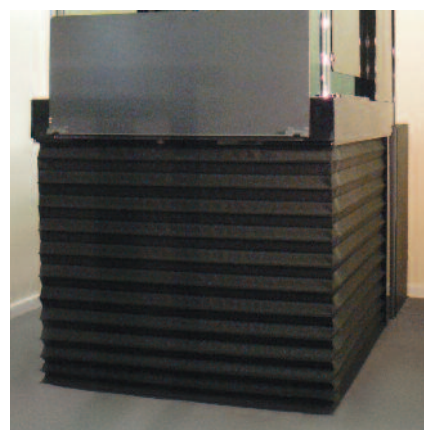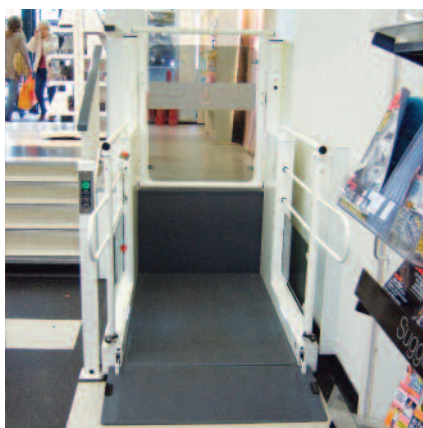

Optional features

- Illuminated tactile controls
- Arrival gongs
- Voice annunciation and platform level indication
- Alarm
- Key-switch to isolate the lift and prevent unauthorised use
- Optional colours and finishes – please ask for details
- Power operated upper landing gate
- Half height glass side panels
- Glass infill for upper landing gate
- Adjacent entry
- Up to 2m version of the Lowriser available

DIMENSIONS:

Platform size (w x d)	Footprint size (w x d)	Min. shaft width*
800 x 1450	1004 x 1890	1144
900 x 1450	1104 x 1890	1244
1100 x 1450	1304 x 1890	1444


TECHNICAL SPECIFICATION:

Standard load	300kg
Maximum travel	1000mm
Speed	20mm/sec
Control system	Constant pressure
Power supply	230V AC 50Hz single phase and earth

Notes:

All dimensions in mm
A minimum of 150mm clearance must be maintained between the lift and any flanking wall in accordance with BS 6440:2011

* Recommended size for shaft width is as above +160mm

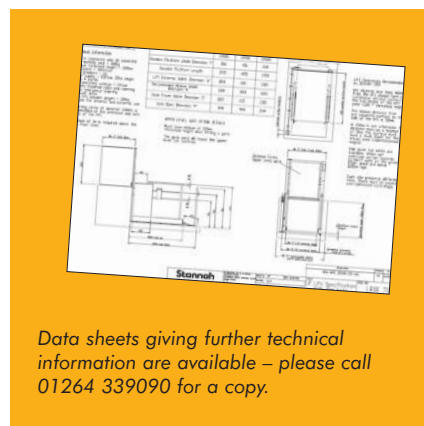

Data sheets giving further technical information are available – please call 01264 339090 for a copy.

Stannah Lifts

Anton Mill, Andover, Hampshire SP10 2NX

Tel: 01264 339090

www.stannahlifts.co.uk

Stannah