

Data Sheet - Cladding THERMO ASH RHOMBOID & SQUARE




Thermory source sustainable, high-quality timbers which are thermally-modified for durability, stability and rot-resistance. The timber will fade to grey naturally over time.





Ageing scale depending on maintenance & exposure

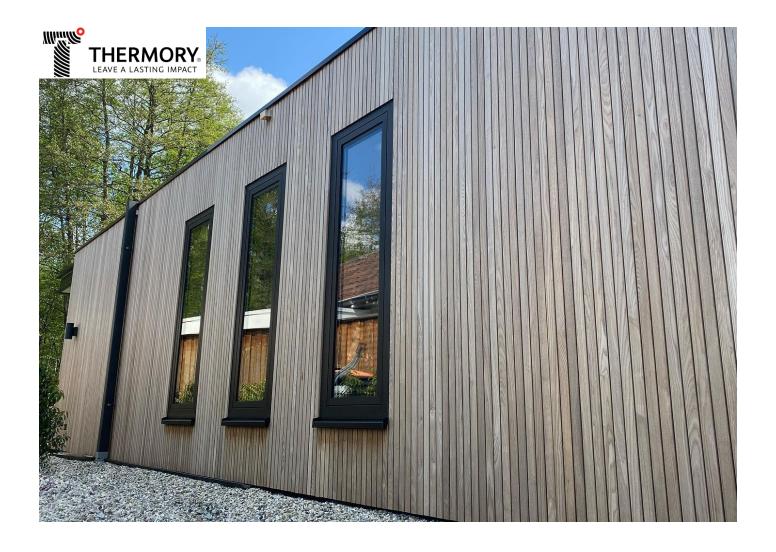



Data Sheet - Cladding THERMO ASH RHOMBOID & SQUARE



FORM





Stock Item - Contact us for board length availability

- ► Thermo-treated Ash (Fraxinus Excelsior)
- Clear grade completely knot-free
- Pre-grooved for compatibility with the Grad 'hidden-fix' system
- ▶ FSC Certified Product available
- Standard gap between boards: 4mm
- Compatible Grad rail: Flat Rail (52)

STRONG



- ► Semi-hardwood density of 600kg/m3
- Maximum dimensional variations of 4%
- ▶ Class 4 Timber

DURABLE



- ▶ Does not require additional treatment other than regular cleaning
- ► 20 Year Warranty conditions of warranty upon manufacturer's guidelines and quality criteria available from info@outdoordeck.co.uk



Europe Certified Wood



Clean Every 12 months



20 YearsAccording To Warranty
Conditions

QUALITY IN A CLICK >