

# PEARL SOLO DOWNLIGHTER KIT

## Mains

### UC01-027

The ceiling mounted Pearl Solo Flushmatic urinal control is used for multiple station urinals. This works by using a passive infrared (PIR) detector which detects movement within the sensing area, switching the unit into a timing mode. After a pre-set time, the solenoid valve opens allowing water to flow into the cistern activating the flushing cycle. The flush time can be customised by the user turning the rotary switch on the Flushmatic board.




#### PRODUCT NUMBER

UC01-027 Pearl Solo Kit (mains)

#### TECHNICAL DATA

Material	ABS
Gross Weight	0.60 kg
Type of mounting	Ceiling mounted
Power source	Mains
Voltage	240v
Valve voltage	6v DC
Valve power	6W Latching
Operation type	Passive infra red sensor
Current	30 - 40 ua Standby
Settings	
Flush time	1, 2, 3, 4, 5, 6, 7, 8, 9 Seconds

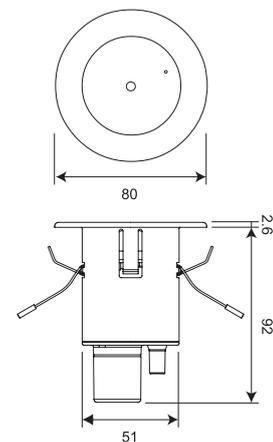

ALL DIMENSIONS IN MM

Last Updated: 2019-11-15, Dart Valley Systems