

## WIRAND FS4 NG

# FS4 NG

Size | Glued



### DESCRIPTION

WIRAND FS4 NG are glued steel fibres designed for engineering applications such as precast concrete structures used in tunnel linings or other civil engineering applications.

With the use of WIRAND FS4 NG the need for conventional steel reinforcement can be reduced or eliminated.

### REINFORCED CONCRETE PERFORMANCE

Minimum dosage as per EN 14889-1

<b>22</b> kg/m <sup>3</sup>	EFFECT ON STRENGTH	
	CMOD = 0.5 mm	1.5 N/mm <sup>2</sup>
	CMOD = 3.5 mm	1.0 N/mm <sup>2</sup>
	EFFECT ON CONSISTENCE	
	Vebe time 7 s	

### SHAPE

The double end hooks of FS4 NG fibres ensure perfect anchorage in concrete.

### PHYSICAL PROPERTIES

Diameter (d)	0.60 mm
Length (l)	33 mm
Aspect Ratio (l/d)	55

**Number of fibres/kg 13,600**

### MATERIAL PROPERTIES

Young's Modulus > 180 GPa


### MECHANICAL PERFORMANCE

Nominal tensile strength of the wire (Rm)	1,250 MPa
Ultimate Strain (DI)	< 2%

### PACKAGING



### HANDLING AND STORAGE

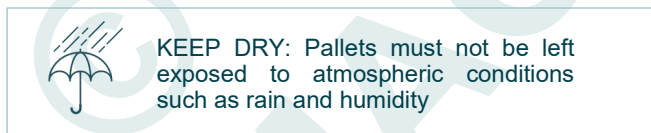

### CERTIFICATES

**EPD kiwa** Ecobility Experts  
EPD-Kiwa-EE-000478-EN

Wirand is manufactured in ISO 9001, ISO 14001, ISO 45001 certified plants.

### REFERENCE STANDARDS

- EN 14889-1:2006 - Fibres for concrete - Part 1: Steel fibres - Definition, specification and conformity
- EN 14845-1:2007 - Test methods for fibres in concrete - Part 1: Reference concretes
- EN 14845-2:2007 - Test methods for fibres in concrete - Part 2 : Effect on concrete
- EN 14651:2005 - Test method for metallic fibred concrete - Measuring the flexural tensile strength (limit of proportionality (LOP), residual)
- ASTM A820-11 - Standard Specification for Steel Fibres for Fibre-Reinforced Concrete
- GB/T 39147-2020 - Fibres for concrete

The producer, for his optimisation and improving process of the product's technical characteristics, has the faculty to modify the standards and the characteristics of the product without any pre-advise. All the information are given in base to our experience; in any case no responsibility for an incorrect use could be referred to the producer or one of his distributors.

**Maccaferri Ltd:**  
T: (+44) 1865 770555

[www.maccaferri.com/uk](http://www.maccaferri.com/uk)

#### Specialist areas:

Sales:  
Technical:  
Construction:

E: sales.uk@maccaferri.com  
E: technical.uk@maccaferri.com  
E: construction.uk@maccaferri.com

**Rep of Ireland:**  
T: (+353) 18851662

[www.geostrong.net](http://www.geostrong.net)

