Elemento

- Robust high impact UV stable housing
- Multiple gland entry positions
- IP66 rated when in use (excluding RCD outlets)
- Lockable 2 gang switched socket outlet as standard



Wireless Switching

- · Wireless 4 channel switching system
- Can be used outside to control multiple lighting circuits, pond pumps and many other electrical devices
- Each circuits is controlled wirelessly using the supplied key fob and wallplate









Elemento IP

4 Channel Wireless Switching



- Wireless 4 channel switching system
- Can be used outside to control multiple lighting circuits, pond pumps and many other electrical devices
- · Each circuit is controlled wirelessly using the supplied key fob and wallplate









IP56

LED Protected Compatible

Wireless Switching

Range Distance

Wireless 4 Channel Radio Receiver / Power Switch c/w MWM-4CHRC and MWM-4CHRT-WH-W 4 circuits each rated at 5 amps 1250 watts per circuit Total pack load MUST not exceed 4000 watts

MWM - 4CHPSKIT

Wireless Transmitters


2 Channel Radio Transmitter (White Plate + White MWM - 2CHRT-WH-W Switch) Battery Powered Range upto 250m 4 Channel Radio Transmitter (White Plate + White MWM - 4CHRT-WH-W Switch Battery Powered Range up to 250m

Hand Held Remotes



Elemento IP

IP66 Switched Power Socket Outlets

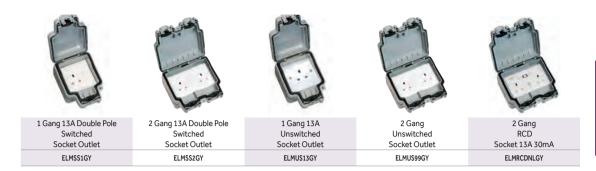

20AX 2 Way **Rocker Switches**



Rocker Switch + Neon ELMR21NGY



2 Gang 20AX 2 Way Rocker Switch + Neon ELMR22NGY

IP66 20AX Switch with Neon



1 Gang 20AX 2 Way Retractive Switch + Neon ELMR2WNGY



1 Gang 20AX Double Pole Switch + Neon

ELM20DPNGY

IP66 Switched Connection Unit



Switched Connection Unit+Neon ELMSPNGY

IP66 Enclosures







Enclosure ELM2MODGY

Junction Box



Junction Box Single ELMSGLJUNBOX