




Saflex® Crystal Clear PVB interlayer

The perfect combination of aesthetic and safety



Low-iron glass is a premium choice for both commercial and residential construction markets when attractive appearance and brilliant neutrality are required. When laminated, however, it may lose its neutrality, transparency, and overall clear aesthetic. To maintain the beauty of low-iron glass, turn to Saflex® Crystal Clear PVB interlayer—Eastman's latest and most color-neutral product—to create a highly desirable aesthetic. Aiming to enhance the natural appeal of low-iron glass such as Guardian UltraClear®, Saflex Crystal Clear was designed to remain virtually undetectable at any visible angle and in any light.

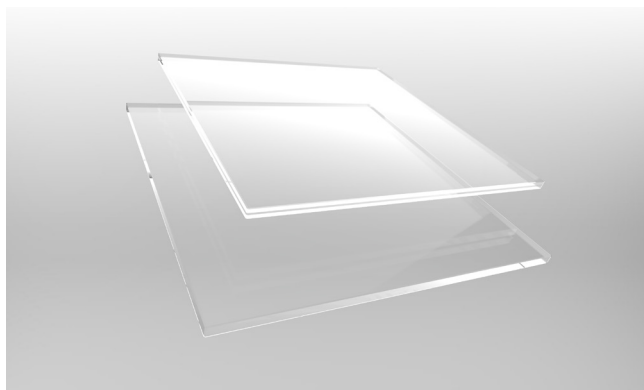

While Saflex Crystal Clear is neutral in appearance, there is no trade-off in safety-impact performance. Ideal for security glass projects large and small, Saflex Crystal Clear offers flexible processing and is available in different dimensions. Because it is compatible with Saflex Solar, Saflex Structural, Saflex Acoustic, and Vanceva® Colors, there is also broad freedom in design.

Saflex Crystal Clear product benefits when used with low-iron glass

- Stunning neutrality and unaltered low-iron glass beauty
- Colorless edges
- Excellent visible light transmission
- Safety glazing compliant
- Resistant to entry or penetration in cases of bomb blast, ballistic attack, forced entry, or vandalism
- Meets acoustic specifications common in the industry

Applications

Saflex Crystal Clear is ideal in a wide range of applications where brilliant neutrality, high transparency, and safety glazing are required.

Interior

Interior doors
Partitions
Balustrades
Stairs and railings
Furniture
Retail shelving
Display cases
Museum glazing

Exterior

Cladding
Curtain walls
Facades
Windows
Skylights
Exterior doors
Storefront/shop windows

Saflex Crystal Clear performance properties

The mechanical and physical properties are the same as Saflex Clear PVB interlayers.

Optical (%) and thermal properties*			SI	IP
Solar transmittance	82	U factor, W/m²·K (Btu/hr·ft²·°F)	5.67	1
Visible light transmittance	89	Solar heat gain coefficient (SHGC), g	0.85	0.85
Absorptance (solar)	11	Light to solar gain (LSG)	1.05	
Tuv	<1			
Color properties*		Dom. WL		
Color rendering index (transmittance)	100			

*As laminated with 3-mm low-iron glass

Data reported in metric (SI) units with inch pound (IP) standard units calculated.

Saflex Crystal Clear product offering

Product	Nomenclature	Thickness (mm)	Length (m)*	Width (cm)*	Form	Color
Saflex Crystal Clear	RB4N	0.76	250	45–322	Refrigerated	Clear
			500	322		
Saflex Crystal Clear	RB4N	0.76	247	45–280	Interleaved	Clear

*Range of available widths and lengths

Consult your Saflex representative for width, length, and form availability for your region.

saflex.com

EASTMAN

The results of insight™

Eastman Corporate Headquarters

P.O. Box 431
Kingsport, TN 37662-5280 U.S.A.

U.S.A. and Canada, 800-EASTMAN (800-327-8626)
Other Locations, +(1) 423-229-2000

www.eastman.com/locations

Although the information and recommendations set forth herein are presented in good faith, Eastman Chemical Company ("Eastman") and its subsidiaries make no representations or warranties as to the completeness or accuracy thereof. You must make your own determination of its suitability and completeness for your own use, for the protection of the environment, and for the health and safety of your employees and purchasers of your products. Nothing contained herein is to be construed as a recommendation to use any product, process, equipment, or formulation in conflict with any patent, and we make no representations or warranties, express or implied, that the use thereof will not infringe any patent. NO REPRESENTATIONS OR WARRANTIES, EITHER EXPRESS OR IMPLIED, OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR OF ANY OTHER NATURE ARE MADE HEREUNDER WITH RESPECT TO INFORMATION OR THE PRODUCT TO WHICH INFORMATION REFERS AND NOTHING HEREIN WAIVES ANY OF THE SELLER'S CONDITIONS OF SALE.

Safety Data Sheets providing safety precautions that should be observed when handling and storing our products are available online or by request. You should obtain and review available material safety information before handling our products. If any materials mentioned are not our products, appropriate industrial hygiene and other safety precautions recommended by their manufacturers should be observed.

© 2020 Eastman. Eastman brands referenced herein are trademarks of Eastman or one of its subsidiaries or are being used under license. The ® symbol denotes registered trademark status in the U.S.; marks may also be registered internationally. Non-Eastman brands referenced herein are trademarks of their respective owners.