
Exit Lane Breach Control

Creating Secure Environments



Security and Safety

Preventing unauthorised access

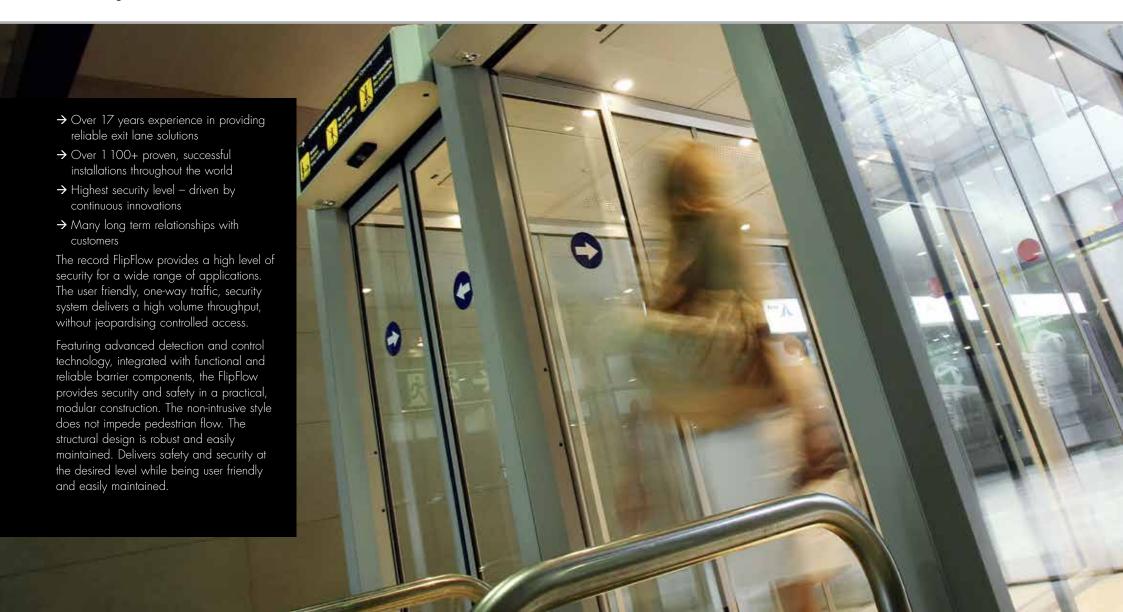

References worldwide

record FlipFlow all over the world





Product range overview

Different concept for different needs

FlipFlow Version	WIDE	SINGLE	TWIN	TRIPLE	Customized lane designs**	Option: extended
Auto flow/interlock	-	-			•	
Throughput flow	3600 - 4500 per hour		3600 - 4500* per hour			No influence
Throughput interlock	n/a		Approx. 500* per hour			No influence
record security level						+1 🔘
Application examples	customs exits, security staff in immediate vicinity		barrier between airside / landside, exit baggage claim, automatic security staff alert			
Use/Application field	after baggage claim, exiting customs or used as a secure emergency egress opening	passport control	barrier between airside / landside transition areas to secure zones after baggage claim exit areas in airports automatic security staff alert customs exit			

^{*} Test automatic change from interlock to flow mode for higher throughput depending on counting of passengers

^{**} customer specific solutions possible (e.g. 90° tunnel or other angled executions, side-by-side solutions, frosted glass))

Effective flow control

High-volume throughput



Key Features


- → Efficient and economic no-return system with high throughput
- → Ensure highest level of security in secure areas (border, airside-landside, passport control, baggage claim & more)
- → Configurable security level and multiple sensor
- → Innovative 3D imaging technology
- → Allows reallocation or exclusion of security guard staff
- → Fits easily into existing exit corridors
- → Side-by-side installations possible
- → Aluminum or stainless steel versions
- → Four widths available: 650, 900, 1100, 1200 mm

Operation modes

- → Flow: doors open and close automatically, security and safety is active
- → Interlocked: Flow mode, but one door is always closed, security and safety is active
- → Auto Flow Interlock Mode: automatic switch from Interlock Mode to Flow Mode as passenger volumes increase, in order to avoid queues while ensuring high security
- → Open: security inactive, doors held open for VIP passage, emergency ingress & egress, etc.
- → Cleaning/maintenance: security inactive, controlled access provided for service and cleaning personal only.

Technical

Details and sizes

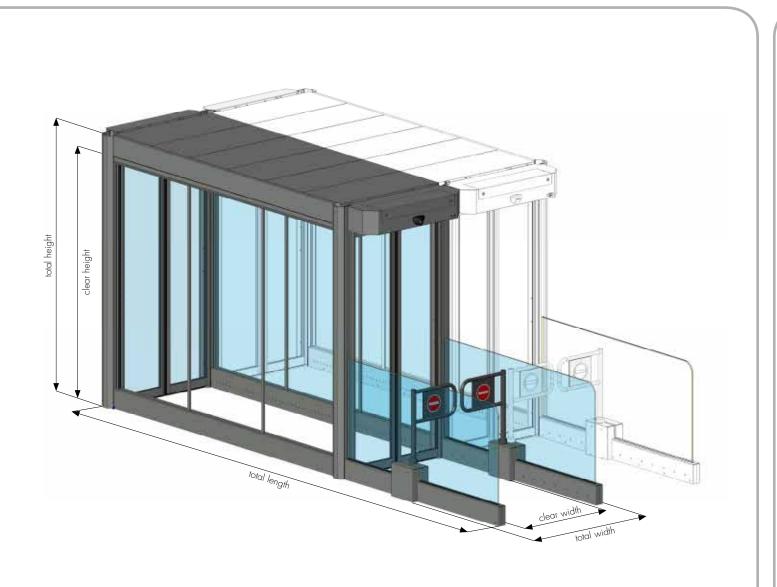

Data

WIDE

ightarrow lotal length	2248 mm
→ Total height	2365 mm
→ Clear height	2 150 mm

TWIN

ightarrow Total length	5242 mm
→ Total height	2365 mm
→ Clear height	2 1.50 mm

TRIPLE

→ Total length	6 <i>57</i> 0 mm
→ Total height	2365 mm
→ Clear height	2 150 mm

OPTION EXTENDED


→ Total length 1999 mm

VALID FOR ALL SYSTEMS

- \rightarrow Clear widths 650, 900, 1100, 1200 mm
- → Total widths 980, 1230, 1430, 1530 mm

Our statement

record – the right partner for your needs

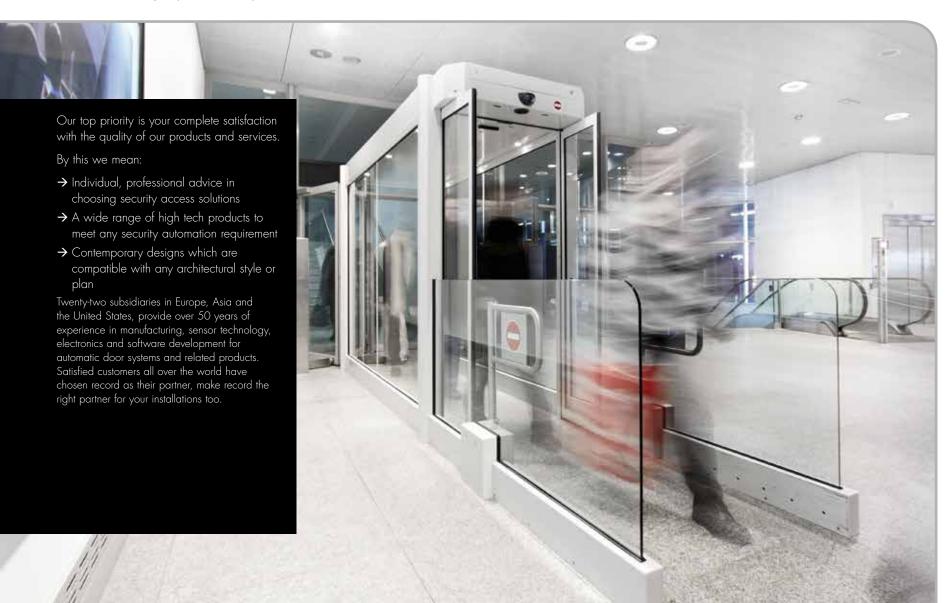

Contact

Please contact us for more information:

→ record UK Limited

Head Office: Unit D, 9 Watt Place, Hamilton International Park, Blantyre, G72 OAH – UK

Northern Office: Unit 2, Shaw Cross Court, Horace Waller V C Parade, Shaw Cross Business Park, Dewsbury, WF12 7RF – UK

Midland Office: Pattison House, Midland Road, Walsall, WS1 3DQ Southern Office: 17 Invincible Road – Farnborough, GU14 7QU – UK

tel.: +44 1698 376411 - fax: +44 1698 376422 - info@recorduk.co.uk - www.recorduk.co.uk

Headquartered in Switzerland, the record group sells its products and services across the globe and is directly present with subsidiaries in many countries.

Global sales and service contacts: www.record.group/countries

