

*Jonzmart*

**RUBBER FLOORING COLLECTION  
2020**



A modern office interior with a bookshelf, a chair, and a window. The bookshelf is filled with books and documents. The chair is a modern, grey, high-back office chair. The window is large and bright, showing a view of the outdoors. The overall atmosphere is clean, professional, and bright.

# JAYMART RUBBER AND PLASTICS LTD

For Floors That Matter

## **Rubber Flooring Collection 2020**

Rubber is a versatile, heavy duty, environmentally friendly floorcovering.

Jaymart can offer a wide range of rubber flooring in rolls and tiles, in an extensive and vibrant colour palette for use in every application imaginable such as Gyms, Airports, Banks, Barracks,

[www.jaymart.co.uk](http://www.jaymart.co.uk)

[sales@jaymart.co.uk](mailto:sales@jaymart.co.uk)

© 2020 Jaymart Rubber & Plastics Ltd.



# Key Features of Rubber Flooring

## **Our range of rubber flooring offers the following key features and benefits**

- Rubber is extremely durable and hardwearing leading to long life expectancy and further conservation of material resources.
- Jaymart rubber flooring is coated with a factory applied finish to prevent marking and making it easier to maintain reducing cleaning costs and use of harmful chemicals to maintain the floorcovering.
- Rubber is environmentally friendly - it contains no PVCs, Plasticers or halogens. Leading to a healthier environment in the application
- Toxologically safe
- Flame retardant - Rubber flooring guarantees low Opacity and smoke toxicity in the case of fire.
- Good resistance to chemicals (Even diluted acids!) and oils

# Duo Floor

Rubber flooring with hammered surface with tone on tone granules and roughened underside for adhesive bonding.



 500x500 | 1000x1000mm  2,5 mm  kg/m<sup>2</sup> 4,00

 500x500 | 1000x1000mm  3,5 mm  kg/m<sup>2</sup> 5,50



## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



DF 32



DF 110



DF 107



DF 117



DF 105




DF 103



DF 126



DF 11

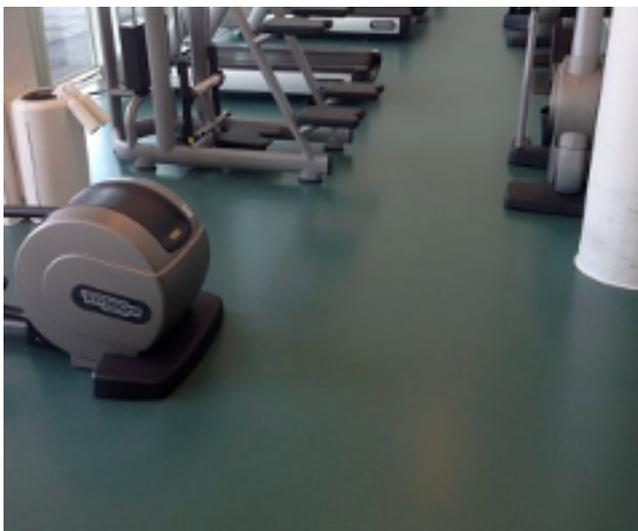

DF 125




DF 114



DF 12



DF 20

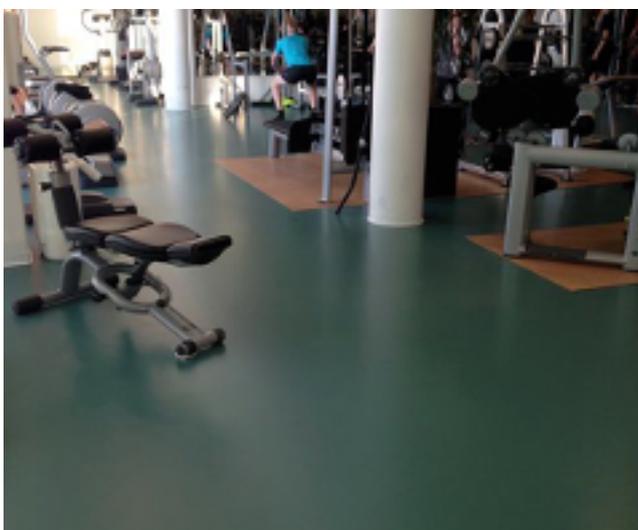

DF 115



DF 124



DF 118



DF 112



DF 106



DF 512

# Suber

Rubber flooring with textured surface in solid colours with cork chips to create a natural effect finish and roughened underside for adhesive bonding.



 EN 14041	23	34	43		
					
					
	500x500 mm	1000x1000mm			
	mm 2,5	kg/m <sup>2</sup> 4,0			
	2,5 mm				



CRK 4015



CRK 4031



CRK 4008



CRK 4047



CRK 4025



CRK 4024



CRK 4023



CRK 4017



CRK 4007



CRK 4046



CRK 4021




CRK 4013



CRK 4006



CRK 4032



CRK 4028



CRK 4045



CRK 4026



CRK 4018



CRK 4009



CRK 4011



CRK 4044




CRK 4005



CRK 4033

# Hammer Terrazzo


Rubber flooring with hammered surface with multi-coloured granules and roughened underside for adhesive bonding.

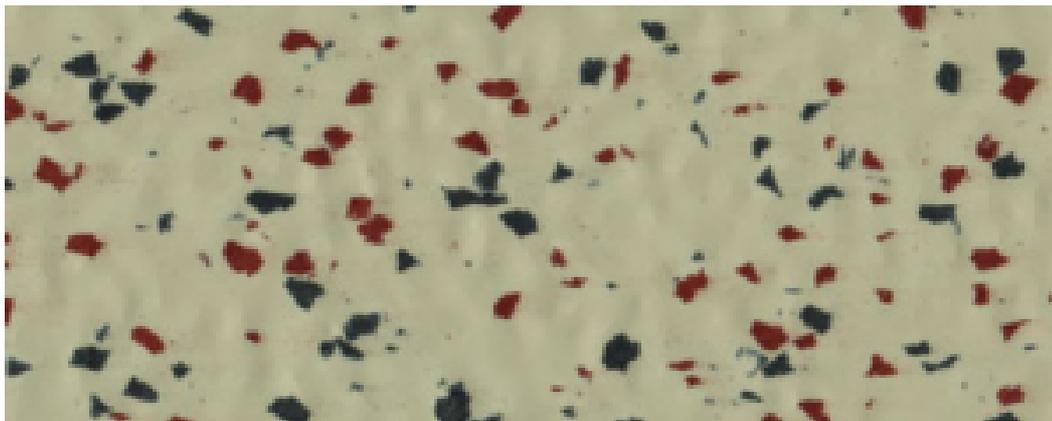

CE EN 14041	32	32	43	2,5 mm
	38	34	43	
EN 665				
	500x500 mm	1000x1000mm		
	mm 2,5 kg/m <sup>2</sup> 4,0	mm 3,5 kg/m <sup>2</sup> 5,5		
	2,5 mm	3,5 mm		

## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



S 101



S 107




S 13



S 110



S 113



S 32



S 122



S 105



S 111



S 117



S 106




S 112



S 118



S 124



S 17



S 103



S 11



S 108




S 20




S 115



S 121




S 12

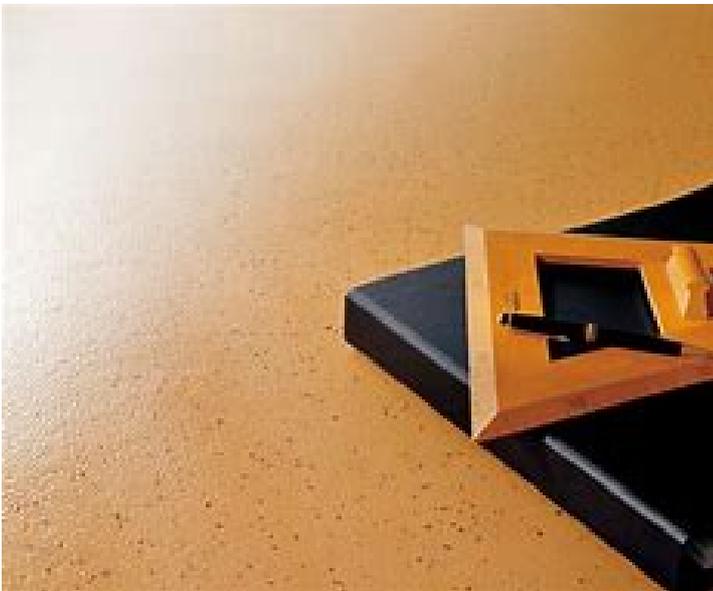

# Slate

Rubber flooring in solid colour with hammered surface and roughened underside for adhesive bonding.

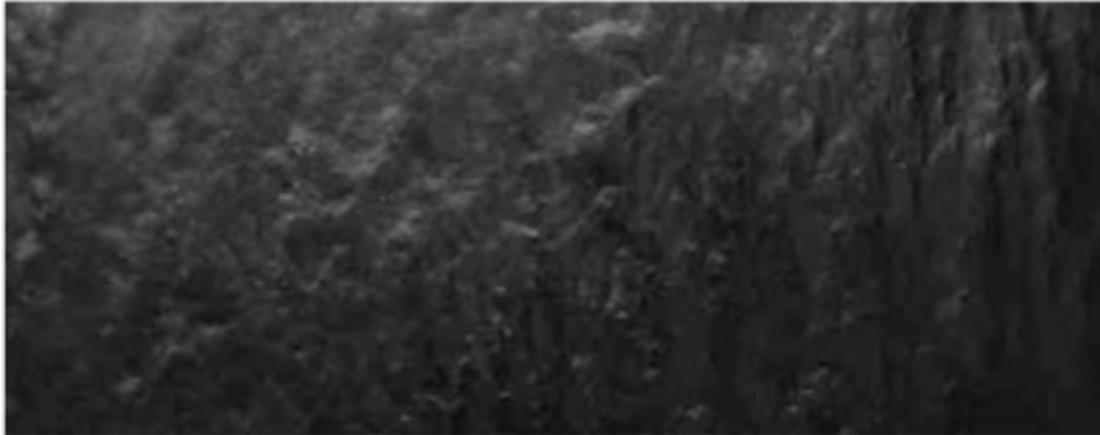


500x500 | 1000x1000mm | 3,5 mm | kg/m<sup>2</sup> 5,40



## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.

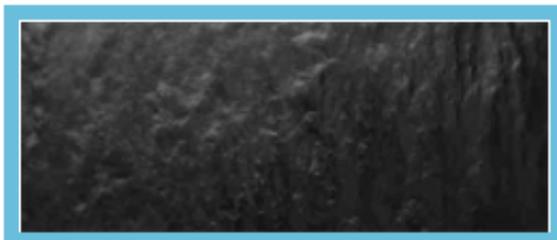

EN 21



EG 84

# Slate Terrazzo

Rubber flooring in solid colour with multi-coloured granules and hammered surface with roughened underside for adhesive bonding.



500x500 | 1000x1000mm | 3,5 mm | kg/m<sup>2</sup> 5,40




## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



AD 32

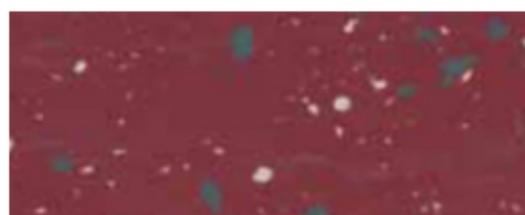

AD 75

# Hammer Unifloor

Rubber flooring in solid colour with hammered surface and roughened underside for adhesive bonding.



CE EN 14041	22	32	42	2,5 mm
	23	34	43	
EN 685				
B+S1 DS E1 VOC				
	500x500 mm	1000x1000mm		
	mm 2,5 kg/m <sup>2</sup> 4,0	mm 3,5 kg/m <sup>2</sup> 5,5		
	2,5 mm	3,5 mm		

## How to interpret the symbols


During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



UF 21



UF 32



UF 113



UF 110



UF 13N



UF 107



UF 117



UF 111



UF 105



UF 124




UF 118



UF 106



UF 125

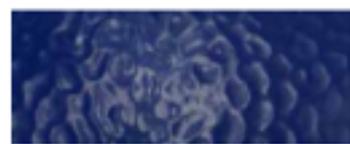

UF 114



UF 121



UF 20



UF 115



UF 103

# Zero TM BK GT

Rubber flooring in solid colour with round studded surface and roughened underside for adhesive bonding.



CE EN 14041	Bfl-s1	DS	E1 HCHO	EN 685 TM	
23	32	41			
TM-BK 2,7 mm (all colours on stock)					
	1000x1000 mm				
	mm 2,7 kg/m <sup>2</sup> 4,00				
	ø 0,5 mm   0,5 mm 2,2 mm 2,7 mm				

## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



EA 01 - Gr 4



EN 21 - Gr 1



EG 04 - Gr 2




EV 05 - Gr 2



EV 18 - Gr 4



EM 22 - Gr 2

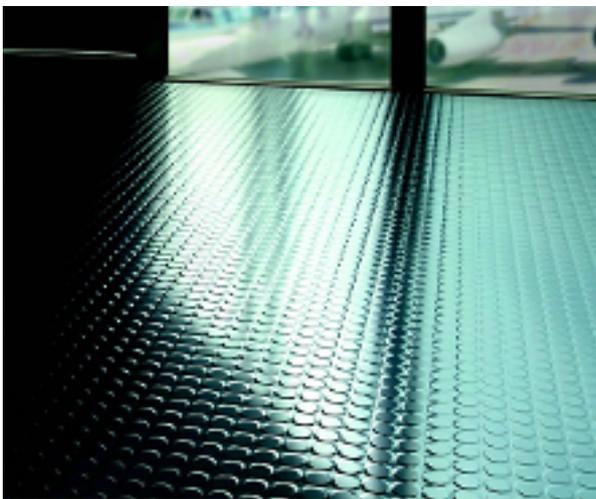

EY 78 - Gr 4



EB 51 - Gr 3



EG 84 - Gr 2



EG 06 - Gr 2



EG 08 - Gr 2



EV 73 - Gr 3



ER 02 - Gr 2



EM 03 - Gr 2



ER 75 - Gr 4



EB 09 - Gr 3



EB 65 - Gr 2



EB 15 - Gr 2

# Zero TP BK GT


Rubber flooring in solid colour with round studded surface and roughened underside for adhesive bonding.



CE EN 14041	Bfl-s1	DS	E1 HCHO	EN 685 TM	
TP-BK 4,0 mm ( <i>standard colours</i> )					
	1000x1000 mm				
	mm 4,0 kg/m <sup>2</sup> 5,20				
	0,5 mm   3,5 mm   <b>4,0 mm</b>				

## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.

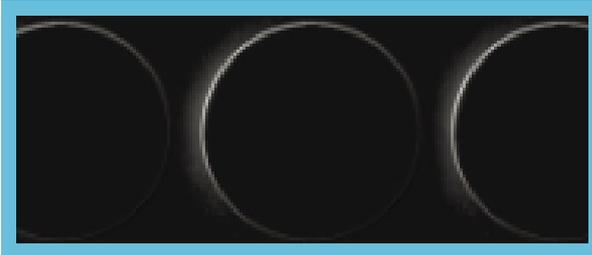


EN 21 - Gr 1



EG 84 - Gr 2



EG 06 - Gr 2

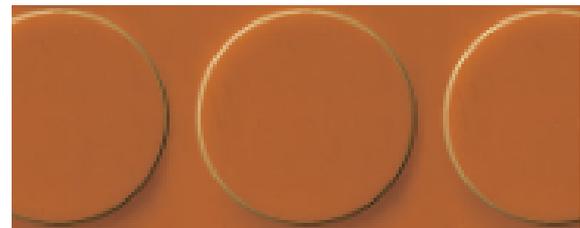

EA 01 - Gr 4



EG 04 - Gr 2



EV 05 - Gr 4



ER 75 - Gr 4



EB 15 - Gr 2




EG 08 - Gr 2



EY 78 - Gr 4

# Smooth Uni UR RP

Rubber flooring with solid colours, made by two layers of natural and synthetic rubber compound, mineral charge, stabilizants and coloured pigments with roughened underside for adhesive bonding and polymeric **surface coating RP**.

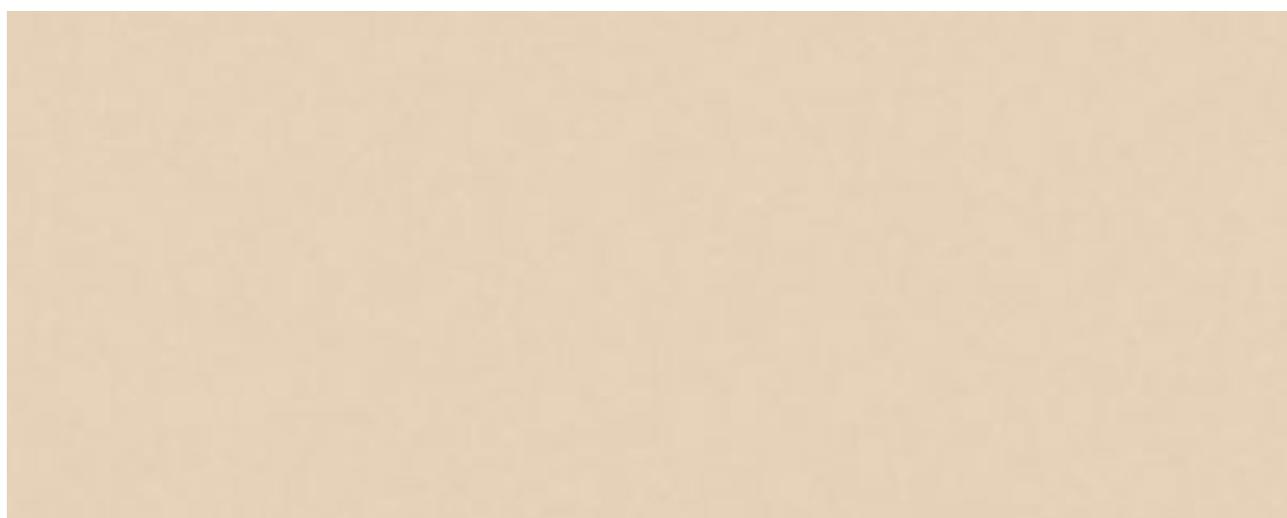

 610x610mm  | 2,0 mm  kg/m<sup>2</sup> 3,20

 1,90x10 m  | 2,0 mm  kg/m<sup>2</sup> 3,20

 610x610mm  | 3,0 mm  kg/m<sup>2</sup> 5,20

 1,90x10 m  | 3,0 mm  kg/m<sup>2</sup> 5,20

  
EN 14041





UR 01



UR 27



UR 28



UR 03



UR 10



UR 04



UR 29



UR 06



UR 18



UR 24



UR 21



UR 13



UR 14



UR 15



UR 17

# Smooth Terrazzo N RP

Rubber flooring with smooth surface in marbled colours with multi-coloured granules with roughened underside for adhesive bonding and **surface coating RP**.



 1,90x14 m  2,0 mm  kg/m<sup>2</sup> 3,30

 610x610mm  2,0 mm  kg/m<sup>2</sup> 3,30







DOT 13



DOT 22

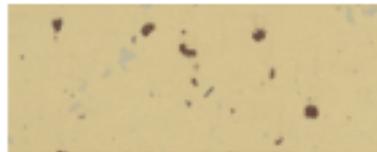


DOT 15

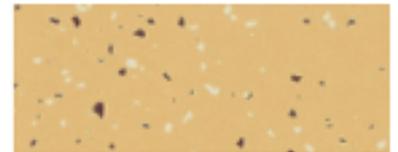


DOT 09




DOT 43

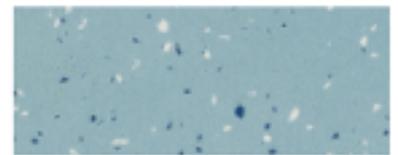

DOT 45

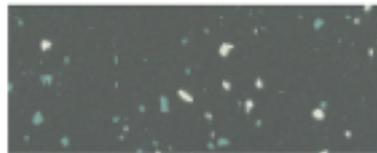

DOT 28

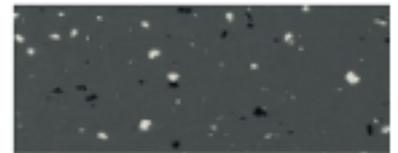

DOT 29




DOT 14



DOT 16




DOT 44

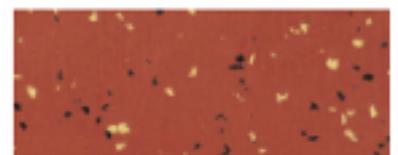


DOT 47



DOT 37

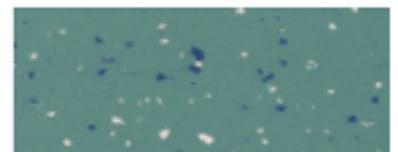

DOT 26

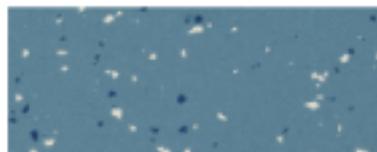

DOT 40



DOT 42

# Smooth Terrazzo EL N - VHP

Dissipative flooring (ESD) with embossed and marbled coloured surface and multi-coloured granules and roughened reverse for adhesive fixing



1,90x10 m | 2,0 mm | kg/m<sup>2</sup> 3,30

610x610mm | 2,0 mm | kg/m<sup>2</sup> 3,30



VHP 13



VHP 16



VHP 44



VHP 29

# Smooth Terrazzo Acoustic N SEL GT


Acoustic flooring (20dB) with embossed and marbled coloured surface and multi-coloured granules and roughened reverse for adhesive fixing



SEL 13



SEL 16

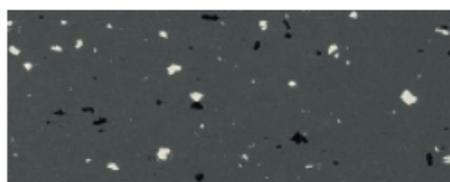

SEL 29

# Hammer Lock Uni



Loose-laying interlocking rubber flooring in solid colour with hammered surface.



 500x500mm  5,0 mm  kg/m<sup>2</sup> 8,00



## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



EM 22

EG 04



EG 06

EY 78



EN 21

ER 75



EB 51

EV 44



EB 09

# Hammer Lock Terrazzo



Loose-laying interlocking rubber flooring in solid colour and multi-coloured granules with hammered surface.



 1000x1000mm	 5,0 mm	 kg/m <sup>2</sup> 8,00
 1000x1000mm	 8,0 mm	 kg/m <sup>2</sup> 12,40



## How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment.



ID 32



ID 30



ID 13



ID 144



ID 103



ID 110



ID 20



ID 21

## The interlocking Options offer you the extra benefits

- Easy to Install Only need rubber mallet and stanley knife!
- Adhesive not required unless in extra heavy duty applications such as fork lift truck trafficked areas
- Long life - exceptionally hardwearing
- Superb problem solvers Ideal for areas where there is wet or damp conditions, low budgets and short let leases
- Extensive range of applications - both commercial and industrial
- Allow access to underfloor access points (power points, drains, heating etc)
- Portability - tiles are easy to store and can be moved from one location to another quickly
- Easy to clean
- Fantastic colours and designs

# Sportway HE

Rubber flooring with high surface resistance. Suitable for golf clubs, ice rink arenas, body building gyms, weight lifting rooms and changing rooms.




1000x1000mm | 6,0 mm | kg/m<sup>2</sup> 9,30  
1000x1000mm | 9,0 mm | kg/m<sup>2</sup> 14,00



### How to interpret the symbols

During the manufacturing process the floor is treated by an appropriate procedure to UV rays, called GT. The treatment with UV rays makes the surface more dense and compact: it acts to effectively repel dirt and makes the surface highly resistant to impurities. This generates big savings and also helps protect the environment./

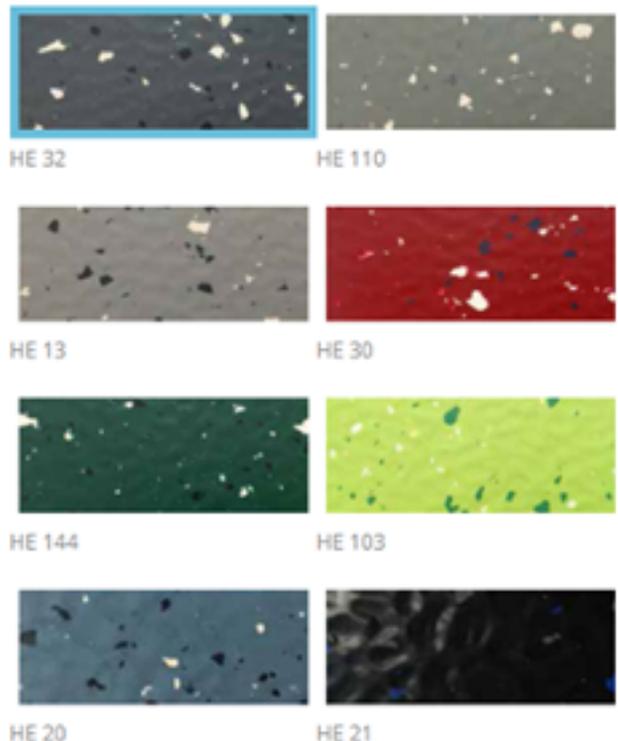

A modern office interior featuring a large window with dark frames, a glass partition wall, and a desk with a black office chair. The ceiling has recessed lighting and a green exit sign. The floor is a light-colored, polished surface.

## Jaymart Rubber & Plastics Ltd

Roman Way

Crusader Park

Warmister

BA12 8SP

Tel 01985 218994

[sales@jaymart.co.uk](mailto:sales@jaymart.co.uk)

Jaymart