



# Contents

Zerodeck Composite Finishes	2
Joists, Clips & Screws	3
A-PED Pedestal Range	4
Technical Data	5

The Outdoor Deck Company is pleased to offer Zerodeck Composite with a Class A fire-rated mineral composite deck board which has been officially welcomed to NHBC Accepts alongside the A-PED, providing additional levels of confidence to clients and the wider industry.

The system from Alfresco Floors comprises of a fully adjustable sub-frame, with built-in slope correction, aluminium joists, and deck boards, all of which are entirely non-combustible.

This system is the first external flooring system to be given the certification by NHBC Accepts and continues to pave the way for a safer and more closely regulated built environment.

## A new type of decking that ticks all the boxes

For too long, timber-alternatives have been limited and haven't always provided the right aesthetic. Zerodeck changes all of that, giving you and your clients the beautiful finish that can be used in every setting, including those that require maximum fire safety.


- ✓ **Handles and looks like timber**
- ✓ **Class A fire-rated**
- ✓ **Clean fitting - clip-fix or surface-mount**
- ✓ **Full colour saturation**
- ✓ **Slip-resistant**
- ✓ **Low maintenance**
- ✓ **Zero wind uplift**

# Zerodeck Composite Finishes

## Board Colours

### Cayman

ZERODECK-2.4-C

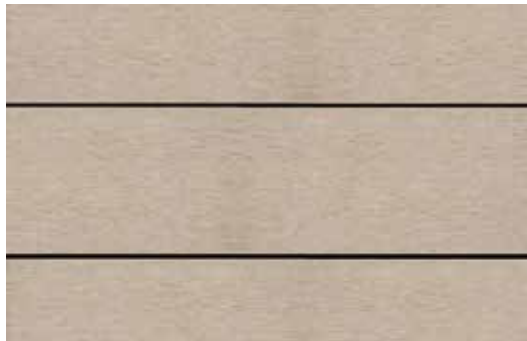


### Monaco

ZERODECK-2.4-M



### Sahara

ZERODECK-2.4-S

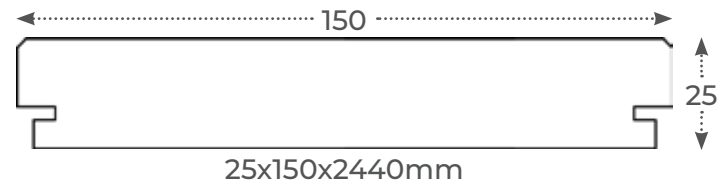

Disclaimer: Please note that there are colour variations between batches, and swatch colours may vary from the original. We always recommend getting a sample.

# A-PED Joists, Clips, Screws & Accessories

Sub-frame option for areas requiring a Class A Fire-rated / non-combustible solution



## Joists

20mm Joist – Silver



**A-PED-JOIST-20**  
Aluminum  
65x20x3000mm

40mm Joist – Silver



**A-PED-JOIST-40**  
Aluminum  
65x20x3000mm

## Clips

Zerodeck Composite Clip – Black



**ZERODECK-CLIP**  
Black Anodised Steel

## Screws

Zerodeck Composite Screw – Black



**ZERODECK-SCREW**  
Black Anodised Steel  
12mm

## Accessories

Spreader Plate



**A-PED-SPREADER-170**  
Thickness 2mm  
Diameter 170mm

Membrane Protection 2mm



**A-PED-PROTECTOR-2MM-FR**  
2mm EPDM  
Diameter 170mm  
Class B Fire-rated

Membrane Protection 3mm



**A-PED-PROTECTOR-3MM-FR**  
3mm EPDM  
Diameter 170mm  
Class B Fire-rated

# A-PED Pedestal Range

\*All models include an integrated slope corrector (up to 5%) except the smallest three models



A-PED-24-30\*  
24-30mm



A-PED-28-34\*  
28-34mm



A-PED-33-39\*  
33-39mm



A-PED-33-48  
33-48mm



A-PED-48-65  
48-65mm



A-PED-57-82  
57-82mm



A-PED-72-117  
72-117mm



A-PED-105-150  
105-150mm



A-PED-140-185  
140-185mm



A-PED-175-220  
175-220mm



A-PED-210-255  
210-255mm



A-PED-245-290  
245-290mm



A-PED-280-325  
280-325mm




A-PED-315-360  
315-360mm



A-PED-350-395  
350-395mm

# Technical Data

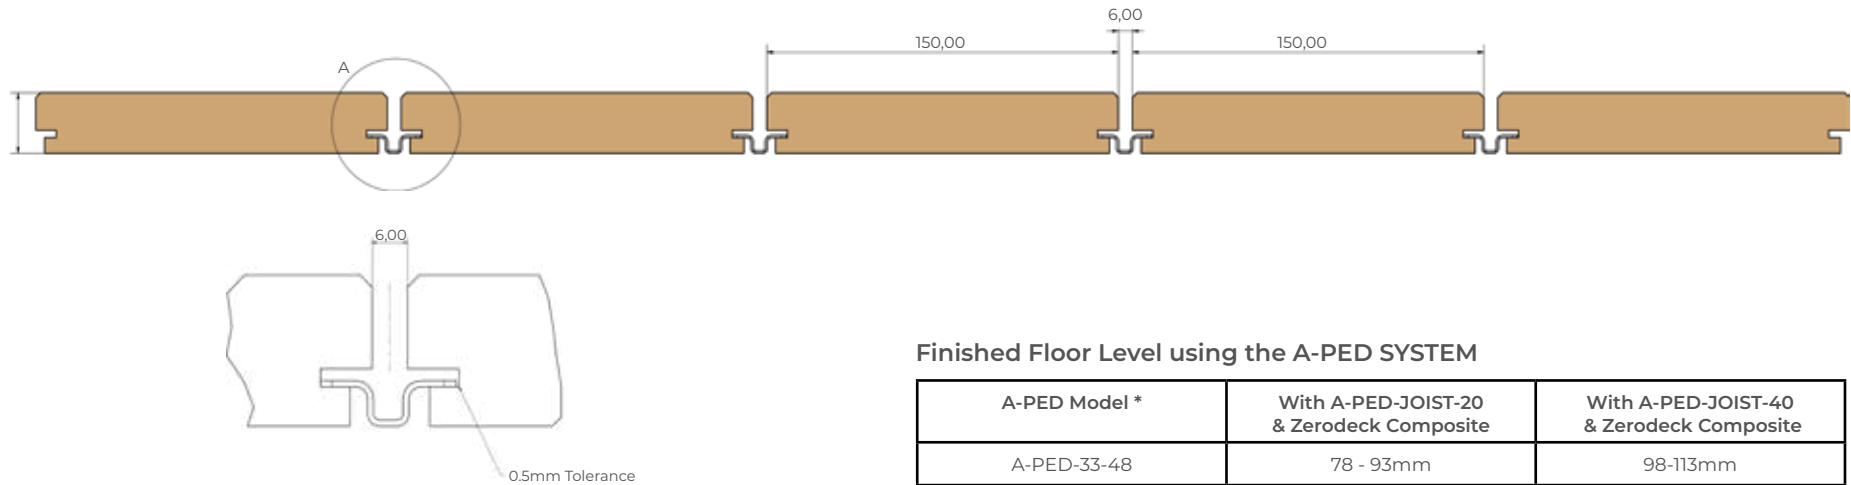

**Dimensions**

**Weight**

**Finish**

**Fire performance**

150 x 2440 x 25mm  
5.95kg / lm 38.4kg / m<sup>2</sup>  
Matt wood grain  
Euroclass A1 to EN 13501

**Finished Floor Level using the A-PED SYSTEM**


A-PED Model *	With A-PED-JOIST-20 & Zerodeck Composite	With A-PED-JOIST-40 & Zerodeck Composite
A-PED-33-48	78 - 93mm	98-113mm
A-PED-48-65	93 - 110mm	113-130mm
A-PED-57-82	102 - 127mm	122-147mm
A-PED-72-117	117 - 162mm	137-182mm
A-PED-105-150	150 - 195mm	170-215mm
A-PED-140-185	185 - 230mm	205-250mm
A-PED-175-220	220 - 265mm	240-285mm
A-PED-210-255	255 - 300mm	275-320mm
A-PED-245-290	290 - 335mm	310-355mm
A-PED-280-325	325 - 370mm	345-440mm
A-PED-315-360	360 - 405mm	380-425mm
A-PED-350-395	395 - 440mm	415-460mm





# Get in touch

We're here to help >

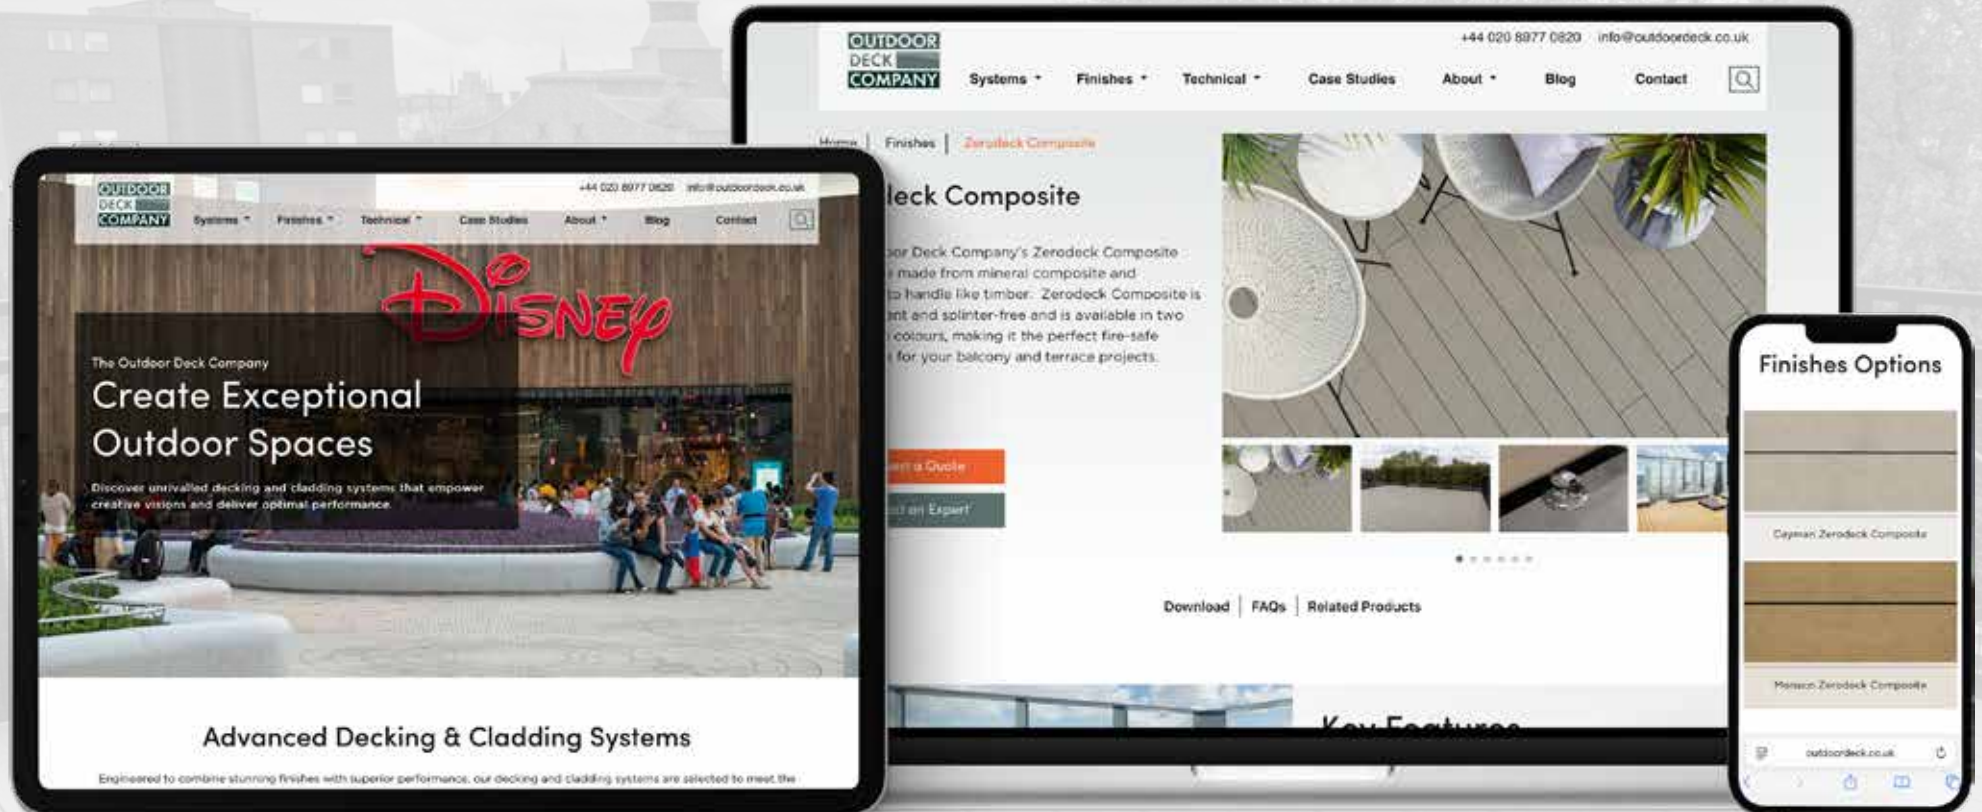

info@outdoordeck.co.uk - outdoordeck.co.uk - +44 020 8977 0820